



Architects and Engineering Specification

SpectrAlert Advance Replacement Outdoor Speaker Strobes

The Speaker Strobe appliance shall be System Sensor SpectrAlert Advance model _____ Speaker Strobe. The speaker strobe shall be listed to UL 1638 and UL 1480 and be approved for fire protective signaling systems. It shall be a dual-voltage transformer speaker strobe capable of operation at 25.0 or 70.7 nominal Vrms. The speaker shall have a frequency range of 400 to 4,000 Hz and shall have an operating temperature between -40°F and 151°F. The speaker strobe must be installed with a SpectrAlert Advance weatherproof back box (shipped separately) or a System Sensor weatherproof plate (shipped separately) in order to remain outdoor approved per UL. The speaker strobe shall be suitable for use in wet environments.


A universal mounting plate shall be used for mounting ceiling and wall speaker strobe products. The notification appliance circuit and amplifier wiring shall terminate at the universal mounting plate. Also, SpectrAlert Advance speaker strobes and the Sync•Circuit™ Module MDL3 accessory, if used, shall be powered from a non-coded notification appliance circuit output and shall operate on a nominal 12 or 24 volts (includes fire alarm panels with built in sync). When used with the Sync•Circuit Module MDL3, 12-volt rated notification appliance circuit outputs shall operate between 8.5 and 17.5 volts; 24-volt rated notification appliance circuit outputs shall operate between 16.5 to 33 volts. If the notification appliances are not UL 9th edition listed with the corresponding panel or power supply being used, then refer to the compatibility listing of the panel to determine maximum devices on a circuit.

Speaker strobes shall be plug-in and shall have the ability to check wiring continuity via a shorting spring on the universal mounting plate. The shorting spring shall also provide tamper resistance via an open circuit if the device is removed. Speaker strobe design shall isolate speaker components to reduce ground fault incidents.


The speaker strobe shall have power taps (from ¼ watt to 2 watts) and voltage that are selected by rotary switches. All models shall have a maximum sound output of 90 dB at 10 feet and shall incorporate a closed back construction. The strobe shall consist of a xenon flash tube with associated lens/reflector system and operate on either 12V or 24V. The strobe shall also feature selectable candela output, providing options for 15 or 15/75 candela when operating on 12V and 15, 15/75, 30, 75, 110, or 115 when operating on 24V. The strobe shall comply with NFPA 72 the Americans with Disabilities Act requirement for visible signaling appliances, flashing at 1 Hz over the strobe's entire operating voltage range.

All notification appliances shall be backward compatible.

Ceiling Speaker Strobe
Wide Band Frequency Response

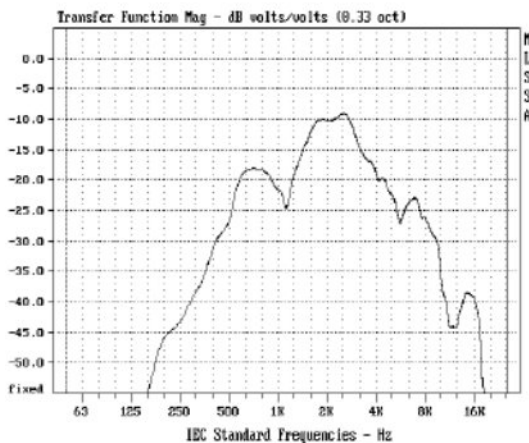

Wall Speaker Strobe
Wide Band Frequency Response

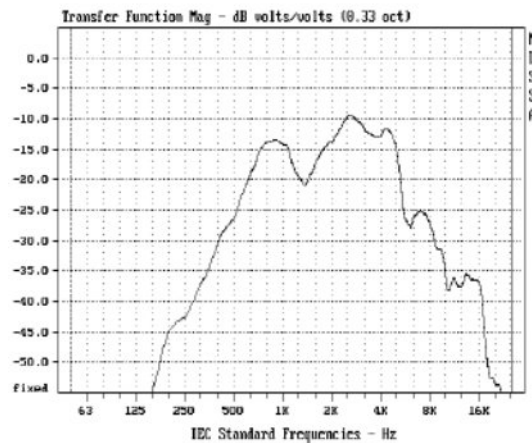

Note: The wide band frequency response is derived using MLS methods