

1. Recordable Event



3. WAP



2. Image Capture

4. Router



5. 443



6. Firewall Secure Network




7. Send Via Internet



8. Receiving centre



Easy Installation.
Fast and Secure.

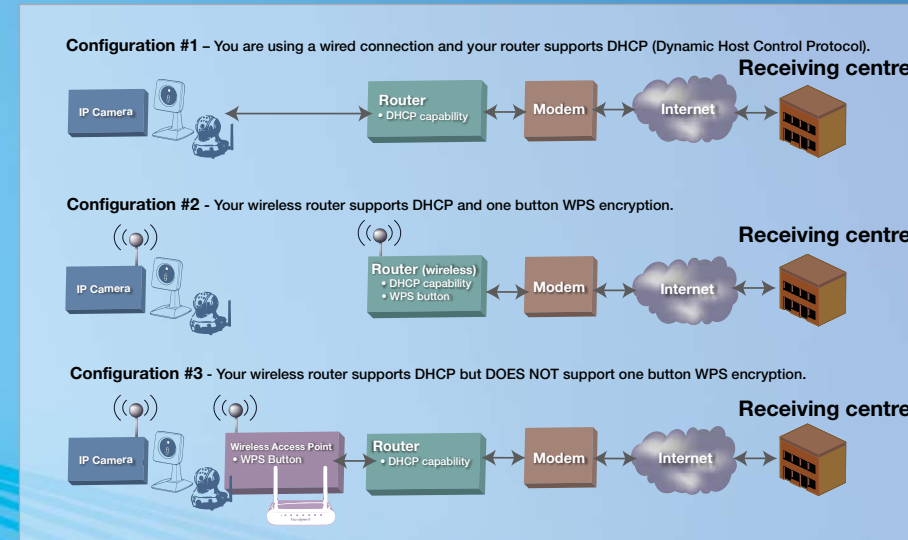


9. View Image



IPCAM Bandwidth Usage

360 x 240
One Camera
Stream
768 Kbps
(one min. average)

768 Kbps upload recommended minimal speed.




360 x 240
Three Camera
Streams
2.3 Mbps
(one min. average)

2.3 Mbps upload recommended minimal speed.



360 x 240
Six Camera
Streams
4.6 Mbps
(one min. average)

4.6 Mbps Upload recommended minimal speed.



Honeywell Total Connect™ Offers More Revenue Opportunities

- Lets end-users check up on kids, nannies, babysitters, pets, elderly relatives, employees and service people
- Alerts and video look-in on PC and mobile devices
- Real time and stored video
- Multiple locations
- Portable video
- Intuitive easy-to-use interface (no training required)

Total Connect Offers Faster and Easier Installation

- Once powered and connected, the iPC communicator automatically seeks the servers in a private, secure and authenticated connection
- **Port 443** is typically available for outbound secure Internet access
- No installation knowledge about encryption keys, network protocol, **firewalls** or other computer networking knowledge is required to complete the installation

Security



- Unlike alternative solutions, Total Connect does not compromise security of the customer's router
- Alternative solutions require installer to open IP server ports

