

CSA / UL Certification Label



UL Control Drawing

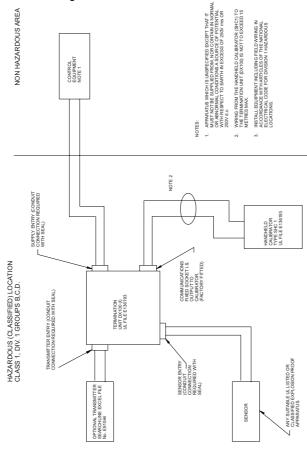


CSA Control Drawing

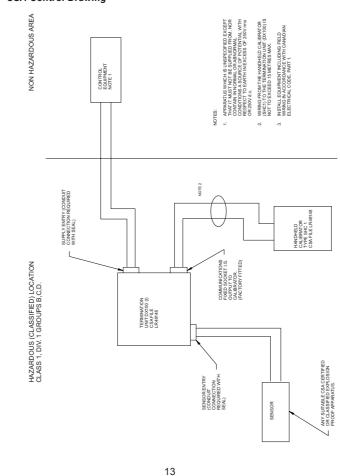

11

Quick Start Guide

Honeywell

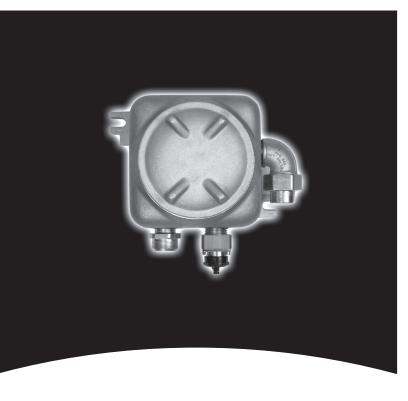

DX100 (I) Termination Unit

1. INTRODUCTION

12

The DX100 (I) Termination Unit is an explosion proof junction box that provides a signal connection point and mounting point for the Honeywell Analytics Searchpoint Optima or Optima Plus gas detectors.

The DX100 (I) Termination Unit can only be used with Searchpoint Optima or Optima Plus gas detectors.

This guide covers the basic on-site mechanical and electrical installation of the unit. Řefer to the DX100 Series Termination Units Technical Handbook (Part No: 2104M0701) for more detailed information about the DX100 (I).

The unit is certified to UL and CSA standards and is intended for use in hazardous environments. The DX100 (I) provides:

- terminals for connecting the gas detector and the field cabling
- an Intrinsically Safe (IS) connection point for the Hand Held Interrogator (SHC1)
- a local mounting point for the Searchpoint Optima or Optima Plus gas detector

The unit features:

- three 3/4" NPT cable/conduit entries
- two terminal blocks
- · a voltage clamp and a communications link entry socket

One of the three cable/conduit entries (usually the left-hand one) is used to mount the Searchpoint Optima or Optima Plus gas detector directly to the box. The Optima and Optima Plus output a 4-20mA signal that is sent via the Termination Unit field wiring back to the controller.

The voltage clamp and the external socket provide the IS connection to the Handheld Interrogator (SHC1).

The SHC1 allows the operator to communicate with the attached gas detector to commission, calibrate or diagnose the system. Full details about the Searchpoint Optima and Optima Plus units can be found in

their documentation, which includes operation of the SHC1. Only the SHC1 Handheld Interrogator must be connected to the DX100 (I) Communications Link Entry Socket.

Honeywell Analytics Limited reserve the right to change or revise the information supplied in this document without notice and without obligation to notify any person or organization of such revision or change. If further details are required that do not appear in this document contact Honeywell Analytics Limited or one of

1

2. SAFETY

Ensure that you read and understand this document BEFORE installing/ operating the equipment. Pay particular attention to the Safety Warnings

WARNINGS

- The DX100 (I) Termination Unit is certified for and intended for use in potentially hazardous areas. Install and use the DX100 (I) Termination Unit in accordance with the latest regulations. No modifications to the unit is permitted without reference to the relevant certifying authority
- Install UL approved and certified equipment including field wiring in strict accordance with the articles of the National Electrical Code for Division 1 Hazardous Locations (NFPA 70).
- Install CSA approved and certified equipment including field wiring in strict accordance with Canadian Electrical Code, Part 1.
- For installations elsewhere, the appropriate local or national regulations
- The Code of Practice regarding Selection, Installation, Use And Maintenance Of Apparatus For The Detection Of Combustible Gases (Other Than For Mining Applications Or Explosive Processing And Manufacture) must be complied with.
- The DX100 (I) Termination Unit must be properly earthed to protect against electrical shock, minimise electrical interference and comply with IS Safety Requirements.
- Dismantling or repair of equipment should be carried out in the safe area
- Do not drill holes in the housing as this will invalidate the explosion
- In order to maintain electrical safety, the unit must not be operated in atmospheres with more than 21% oxygen
- 10. Do not open the enclosure in the presence of an explosive atmosphere.

CAUTIONS

- Only the Handheld Interrogator (SHC1) must be connected to the Termination Unit's communication link entry socket.
- 2. The DX100 (I) Termination Unit can only be used with Searchpoint Optima or Optima Plus gas detectors

2

Please Note:

While every effort has been made to ensure accuracy in this publication, no responsibility can be accepted for errors or omissions. Data may change, as well as legislation, and you are strongly advised to obtain copies of the most recently issued regulations, standards,

14

This publication is not intended to form the basis of a contract

Find out more at:

Contact Honeywell Analytics

Europe, Middle East, Africa Life Safety Distribution GmbH Javastrasse 2 8604 Hegnau

Tel: +41 (0)44 943 4300 Fax: +41 (0)44 943 4398 gasdetection@honeywell.c

Customer Service: Tel: 00800 333 222 44 (Freephone number) Tel: +41 44 943 4380 (Alternative number) Fax: 00800 333 222 55 Middle East Tel: +971 4 450 5800 (Fixed Gas Detection)
Middle East Tel: +971 4 450 5852 (Portable Gas Detection)

Honeywell Analytics Inc. 405 Barclay Blvd. Lincolnshire, IL 60069 Tel: +1 847 955 8200 Toll free: +1 800 538 0363 Fax: +1 847 955 8210

Asia Pacific

Honeywell Analytics Asia Pacific #701 Kolon Science Valley (1) 34 Worldcup Buk-ro, Mapo-gu, Seoul 03922, Korea Tel: +82 (0)2 6909 0300 Fax: +82 (0)2 2025 0328 India Tel: +91 124 4752700

EMEA: HAexpert@honeywell.com US: AP: ha.us.service@honeywell.con ha.ap.service@honevwell.com

Issue a3 03/2017 H MAN0618 V1 2140M0702

Honeywell

4. INSTALLATION

INSTALLATION

INSTALLATION

This section identifies the main features of the Termination Unit and also details important dimensions for the unit when installing.

177.8mm 152.4mm 101.6mm 4in. Mounting Lug Communications Link Entry Socket Щ 127mm Removable Screwed Lid Gland/Conduit

It is important before starting these procedures that the detailed information provided in the DX100 Series Termination Units Technical Handbook about DX100 (I) installation has been carefully considered at the planning stage.

The following points should be noted.

General Installation Guidelines

- Read the Warnings and Cautions at the beginning of this document and all the relevant instructions before starting any of the installation procedures.
- Identify external cable requirements and the necessary cable entry ports to be used on the Termination Unit.
- Refer to the documentation for the associated control system for details about external network connection information, field wiring, interconnections, etc.
- Refer to the associated Searchpoint Optima handbook for details about the

MECHANICAL INSTALLATION

Mechanical Installation Guidelines

- Identify a suitable location where the Termination Unit can be mounted. The unit should be fitted to a flat surface.
- When fitting a Termination Unit consideration should be made regarding the probability of mechanical impacts and interference from other equipment and

This procedure describes how the DX100 (I) is installed at the mounting location and then the Optima gas detector is fitted to the Termination Unit.

(1) Securely fit the Termination Unit at the required monitoring point.

Use the two Termination Unit mounting lugs. Ensure the communications link entry socket connector is located at the bottom. This is to fulfil the requirement to position the Optima sensor horizontally so that the risk of fouling the gas detector's optical surfaces is reduced.


(2) Remove the Termination Unit lid

Use the lugs on the lid to unscrew it anticlockwise from the Termination Unit

(3) Fit the Optima or Optima Plus detector to the left-hand entry. First remove the 3/4 NPT approved blanking plug.

- (4) Fit approved certified 3/4 NPT cable glands or conduit fittings to the Termination Unit cable/conduit entries as required.
- (5) Fit the external field wiring through the cable/conduit fittings and secure.
- (6) Terminate the Optima and field wiring.


Refer to Electrical Installation The diagram shows a typical Searchpoint Optima Plus and DX100 (I) installation



ELECTRICAL INSTALLATION

Electrical Installation Guidelines

- 1. Isolate all associated power supplies and ensure that they remain OFF during the procedures
- 2. Ensure that approved and certified cable glands have been fitted to the Termination Unit cable entries where used for field wiring, with sealing washers where necessary to maintain the ingress protection rating.
- 3. Ensure that any cable gland/conduit locking rings are fitted before terminating
- Make sure that a conduit sealing fitting is installed within 460mm (18in.) of the Termination Unit on all conduit runs.



- Ensure that approved and certified blanking plugs are fitted to all unused Termination Unit cable entries.
- 6. The Termination Unit mounting plate must be bonded to a protective earth.
- Suitable crimps and/or ferrules must be fitted when connecting more than one wire to a Termination Unit terminal.
- The field terminals of the Termination Unit accept single or multi-stranded wire from 22-12 AWG (0.326 to 3.31mm²). Cables should be routed carefully to avoid physical and environmental hazards such as mechanical stress and high temperatures.
- In order to ensure correct operation and to meet requirements for RFI and EMC, it is recommended that all field cables are screened with the cable screen connected at one end only (see the DX100 Series Technical Handbook for further details - Part No: 2104M0701).


INSTALLATION

3

INSTALLATION

Procedure

Connect the gas detector and field wiring to the terminal blocks in the DX100 (I) Termination Unit according to the following wiring diagram and table.



Terminal/		Gas Detector Wiring		Field Wiring
Number		Function	Colour	
ГВ1	1	-	-	-
	2	A	Orange	-
	3	В	Blue	-
	4	-	-	-
ГВ2	1	+24VDC	Red	-
	2	-	-	+24VDC - Supply
	3	4-20mA	White	4-20mA - Output
	4	-	-	-
	5	0V	Black	-
	6	-	-	0V - Supply
Earth Posts	-	Earth	Green/Yellow	Earth Barrier Earth

5. SPECIFICATIONS

5

Connections

Inputs Searchpoint Optima

Searchpoint Optima Plus

Field wiring.

IS protected SHC1 Handheld Outputs

Interrogator communications (RS485)

4-20mA (Non-isolated).

Power Supply 18-32VDC

Environmental

-25°C to 40°C (-40°F to 104°F). Operating -55°C to 40°C (-67°F to 104°F). temperature

Enclosure

Size

Entry Socket One IS protected Communications Link Entry Socket for connecting the SHC1 Handheld interrogator

> Three 3/4 NPT entries (one each side and one in the bottom) to accept gas detector and field cabling

Cable/Conduit or 3/4" conduit. **Entries**

212mm (8.35in.) wide x 152.4mm (6in.) high x

117.5mm (4.625in.) deep. Add approximately 60mm (2.36in.) to the height for the Communications Link

Entry Socket.

2.5kg. Weight

Material IP66 to BS EN 60529:1992, Degrees of Ingress protection provided by enclosures (IP code).

Protection Class 1, Div 1, Groups B, C, D Class 1, Div 1, Groups B, C, D (see 6. Certification

Certification for details)


22-12 AWG (0.326 to 3.31mm2), 105C Field Wiring

6. CERTIFICATION

6

This section specifies UL and CSA certification information for the DX100 (I) Termination Unit. It includes relevant Control Drawings

A Honeywell Analytics certification label is located on the right-hand side of the



Honeywell Analytics certification label

The label contains all the relevant information regarding the product's identification and certification state

The part number of the certified UL/CSA DX100 (I) Termination Unit is

The following diagrams show the Honeywell Analytics UL and CSA Certification Labels. The label content for the CSA label is explained. The UL label is similar

10