



www.firelite.com

July 12, 2004

DF-51078 • A2-400

MRP-4424 (C/E) Agent Release Control Panel

Section: Conventional

GENERAL

The **MRP-4424(C/E)** is a 24-volt, Agent Release Control Panel. Compact and cost-effective, the MRP-4424 is powerful, offering a variety of options designed to meet most low-end releasing applications.

FEATURES

Initiating Device Circuits (IDC's)

- Two Style B/D (Class B/A).
- Manual release input, Style B/D (Class B/A).
- Abort switch input, Style B/D (Class B/A).
- Supervisory input option, Style B (Class B) (dipswitch selectable).
- Disable/Enable control per IDC.
- End-of-Line Resistor:
MRP-4424(C) — 4.7K, 1/2-watt (#71252, UL listed).
- Maximum loop resistance: *MRP-4424* 200 ohms.

Notification Appliance Circuits (NAC's)

- Two Style Y/Z (Class B/A) (NACs @ 1.5 amps each).
- Two Release Circuits, Style Y (Class B).
- Disable/Enable control per NAC.
- Alarm and trouble resound.
- Distinct audible indications for: one zone in alarm; two zones in alarm; release.
- Output circuits protected against false activations by two-step command sequence.
- End-of-Line Resistor:
MRP-4424(C) — 4.7K, 1/2-watt (#71252 UL listed).
- Maximum allowable voltage drop due to wiring: 2 VDC.
- 2.25 amps of notification appliance power.

Auxiliary Outlets

- Resettable four-wire smoke detector power @ 200 mA.
- Non-resettable power @ 200 mA (subtract from 4-wire smoke power).

NOTE: Use of above auxiliary power outputs does not de-rate available 2.25 amps of NAC power.

- Integral Form-C alarm and trouble relays.

Programming and Software

- Last Event Recall feature traps unverified alarms or intermittent troubles.
- Cross-zone option (dipswitch selectable).
- Delay timer: 0, 10, 20, or 30 seconds (dipswitch selectable).
- Dual hazard operation; single hazard if release circuit #2 is used for Supervisory input (dipswitch selectable).

Power and Batteries

- 220/240 VAC model (MRP-4424E) available.
- Integral battery charger capable of charging up to 15.0 AH batteries.



California
State Fire
Marshal
7165-0075:161
(MRP-4424)

MEA
420-91-E
(MRP-4424)



Mrp4424cv.wmf

MRP-4424

- Fuseless, power-limited technology meets new UL power-limiting requirements, effective May 1, 1995, on all circuits (excludes optional municipal box output).
- Battery/earth fault supervision.

Other System Features

- Meets the requirements of:
NFPA 72 – 1993 Edition, Local, Auxiliary, Remote Station, Proprietary Fire Alarm Systems, and Central Station Signaling Systems.
NFPA 12, CO₂ (high pressure only) Extinguishing Systems.
NFPA 12A, Halon 1301 Extinguishing Systems.
NFPA 12B, Halon 1211 Extinguishing Systems.
- Extensive transient protection.

Mechanicals

- Electronics and operational controls fully enclosed in lockable cabinet capable of housing up to 12.0 AH batteries.
- Optional **TR-4XRF** trim ring for semi-flush mounting between 16" center studs.
- Slide-in labels for zone identification.

Fire•Lite® Alarms is a Honeywell company.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For more information, contact Fire•Lite Alarms, One Fire-Lite Place, Northford, Connecticut 06472. Phone: (800) 627-3473, Toll-Free FAX: (877) 699-4105.

ISO 9001
CERTIFIED
ENGINEERING & MANUFACTURING
QUALITY SYSTEMS



Options

- Optional **4XZMF** module for four-zone/function relays.
- Local energy or remote station connection with optional **4XTMF** module.
- Optional **RZA-4XF** remote annunciator mounts to single-gang box and requires **4XLMF** LED driver module.
- Volt/amp meter capability with optional **4XMMF** module.
- **DP-4XF** dead-front dress panel option (included with ULC Canadian product).
- Special abort options for IRI, New York City, and other local jurisdictions (dipswitch selectable).

CONTROLS AND INDICATORS

Membrane Switch Controls


- "A.C. POWER".
- "SYSTEM ALARM".
- "RELEASE".
- "SUPERVISORY".
- "SYSTEM TROUBLE".
- "CIRCUIT TROUBLE".
- "ALARM SILENCED".
- "POWERTROUBLE".

LED Indicators

- "Tone Silence" to silence tone.
- "Alarm Silence" to silence alarm.
- "Alarm Activate" to sound alarm.
- "Reset" for control and detectors.

SPECIFICATIONS

- **Primary input power:** 120 VAC, 60 Hz, 1.2 amps. 220/240 VAC model (MRP-4424E) available.
- **Wire size:** minimum 14 AWG with 600 V insulation.
- **Total 24 V system power:** 2.45 amps.
- **Standard notification appliance circuits:** 2 Style Y/Z.
- **Release circuits:** 2 Style Y.
- **Notification appliance power:** 2.25 amps.
- **Maximum current per NAC:** 1.5 amps.
- **Resettable four-wire smoke detector power:** @ 200 mA (subtract from total 24 V system power).
- **Non-resettable power:** @ 200 mA (subtract from four-wire smoke power).

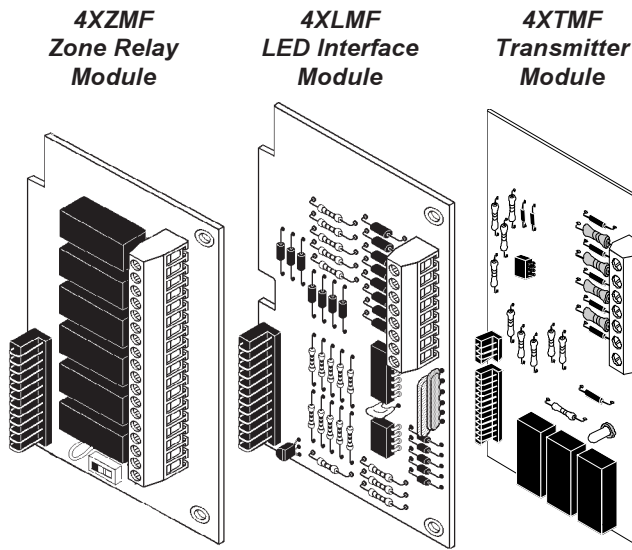

- **Battery charger range:** 7 AH - 15 AH.
- **Charger float rate:** 27.6 V, 1.5 amps.
- **Control panel alarm and trouble relay contact ratings:**
 - 2.0 amps @ 30 VDC (resistive).
 - 0.5 amps @ 30 VAC (resistive).

CABINET SPECIFICATIONS

Door: 16.125" (409.575 mm) high x 14.625" (371.475 mm) wide x 0.675" (17.145 mm) deep.

Backbox: 16.0" (406.40 mm) high x 14.5" (368.30 mm) wide x 4.75" (120.65 mm) deep.

PRODUCT LINE INFORMATION

- MRP-4424** Agent Release Control Panel.
- MRP-4424C** Same as above with ULC listing and DP-4XF dead-front panel.
- MRP-4424E** Same as MRP-4424 with 220/240 VAC.
- RZA-4XF** Remote annunciator (*requires 4XLMF*). Mounts on single-gang box and provides: System Trouble LED (Y); Notification Circuit 1 LED (R); Notification Circuit 2 LED (R); Releasing Circuit 1 LED (R); Releasing Circuit 2 LED (R); and local piezo sounder with Silence switch.
- 4XLMF** Remote annunciator driver for RZA-4XF. Occupies one of the two option connectors.
- 4XTMF** Remote station output or municipal box connection. Occupies one of the two option connectors.
- 4XZMF** Relay module, provides Form-C general alarm/trouble contacts and the following Form-C relays: one detector in Alarm; two detectors in Alarm; Releasing Circuit 1 activated; and Releasing Circuit 2 activated. Occupies one of the two option connectors.
- 4XMMF** Volt/amp meter module. Voltmeter measures voltage across the batteries, and ammeter measures the charging current to the batteries.
- ZZDS** 2-zone Disconnect Switch — provides mechanical zone disconnect.
- RP-3.3K** Reverse Polarity Kit — required for City of Chicago applications.
- DP-4XF** Full-length internal dead-front panel (*included with "C" suffix model*).
- TR-4XRF** Trim Ring — semi-flush mounting.
- BAT-1270** 7 AH, 12 V gell cell battery.
- BAT-12120** 12 AH, 12 V gell cell battery.
- 4424BCRB** Replacement Mother Board.