

The Phoenix Controls Valve Drawband Clamp allows quick and easy installation or removal of single non-flanged valves into either plain or spiral ductwork. Specially designed for use with Phoenix Controls venturi valves, the clamp has two drawband bolts so it can be installed with even tightness onto both the valve and ductwork.

- For clean air applications, use commercially available UL181 code compliant tape between the valve and the duct to create a seal between the two.
- For corrosive exhaust applications, use Phoenix Controls Valve Installation Tape, a 2" wide PTFE adhesive tape, to create the seal and protect the drawband clamp gasket from chemical corrosion.

Phoenix Controls drawband clamps come in kits of ten, same size clamps, per box.

## FEATURES

- Easy installation requires less time than other methods.
- In corrosive applications, clamp installs without damage to valve's protective coating.
- No protrusions in the air stream, reduced dust/dander build-up.
- Cost-effective method for valve removal without any damage.
- Two bolts ensure even tightening.
- Allows rotation for servicing.

## SPECIFICATIONS

### Construction

Galvanized Steel

### Gasket

UL94 Neoprene

### Design

Stepped to accommodate valve versus duct diameter differences

### Tightening Torque

Not to exceed 40 in-lbs.



**Drawband Clamps - 14", 8", and 6" sizes shown**

## Regulatory Compliance



WEEE Directive 2012/10/EC  
Waste Electrical and Electronic Equipment Directive

At the end of the product's life dispose of the packaging and product in a corresponding recycling center. Do not dispose of the unit with the usual domestic refuse. Do not burn the product.

- RoHS3
- EU Contact Address:  
Pittway Tecnologica Srl  
Via Caboto 19/3  
34147 Trieste TS  
Italy

## HCAI Certified

This device is certified for HCAI Seismic Certification Preapproval per 2013 CBC, 2012 IBC, ASCE 7-10, and IEC-ES-AC-156. HCAI Special Certification number OSP-0290.

## ISO


Phoenix Controls Designs, Develops, Manufactures, and sells products, systems, and service to control the environment and airflow of critical spaces. Phoenix Controls is registered to ISO 9001:2015.

## Warranty

Phoenix Controls Warrants all venturi valves against defects in material and workmanship for a period of 5 years. In addition, all other equipment manufactured by Phoenix Controls, such as sash sensors, fume hood monitors, and equipment supplied but not manufactured by Phoenix Controls is covered by a 3 year warranty.


## ORDERING GUIDES

### Drawband Clamp Kits

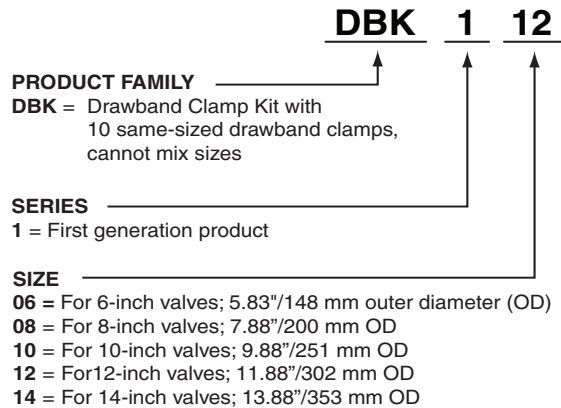

### Valve Installation Tape

For corrosive applications; Valve Construction B, C, and D

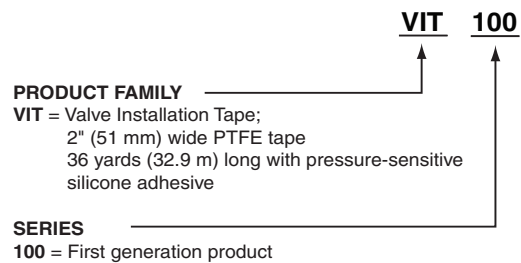

Use the following table of approximate coverages to estimate the number of rolls required.

Valve Size	Valve Bodies/Roll
06	16
08	12
10	10
12	8
14	6