

## 4 MP HQA WDR IR Bullet Camera

HB74HD4/HB276HD4

Supercharge your analogue security system with Honeywell's HQA technology for high definition 4 MP images over your existing coax infrastructure. The Performance Series 4 MP HQA line includes a wide range of high performing IR cameras that are easy to install and even easier to use.

### Superior Image Quality

- Full HD 4 MP 12,5/15 fps image (25/30 fps @ 1080p) with a 1/3" 4.1 MP sensor
- Long distance transmission over coaxial cable with low attenuation and latency—up to 500m (1,640ft) using RG-59
- True Day/Night provides vivid color images by day and clear black-and-white images at night with ICR
- Excellent low-light performance with 2D/3D noise reduction

### Flexible Surveillance Solution

- 3.6 mm fixed lens (HB74HD4) or 2.7-12 mm Motorized Focus Zoom (MFZ) VF lens (HB276HD4)
- IR LEDs provide up to 40m (131ft) for HB74HD4 or 60m (200ft) for HB276HD4 of illumination in dimly lit or nighttime scenes (depending on scene reflectance)
- Smart IR technology provides even distribution of IR
- Weatherproof (IP66) camera housing
- -30°C to 60°C (-22°F to 140°F) working temperature
- Plug-and-play compatible with Honeywell HRHT 4/8/16-Channel Hybrid 4 MP HQA DVRs

### Easy to Install and Use

- HB74HD4: 12 VDC power input; HB276HD4: 12 VDC/24 VAC power input
- Uses existing BNC cabling—no rewiring required
- Remote configuration through web client or from the DVR



*These flexible, fully featured cameras are ideal for a wide range of surveillance applications, providing excellent picture quality at an affordable price.*

## FEATURES

- Low-light performance down to 0.01 lux (color) or 0 lux with IR LEDs on
- 120 dB True WDR supported
- HQA/CVBS video output
- Pole mount and corner mount options available


# 4 MP HQA WDR IR Bullet Camera

## SPECIFICATIONS


OPERATIONAL	
VIDEO STANDARD	NTSC/PAL
SCANNING SYSTEM	Progressive scan
IMAGE SENSOR	1/3" 4.1 MP CMOS
NUMBER OF PIXELS (H×V)	2688 (H) × 1520 (V)
ELECTRONIC SHUTTER SPEED	NTSC: 1/3 – 1/100 000 s; PAL: 1/4 – 1/100 000 s
MINIMUM ILLUMINATION	HB74HD4: 0.01 lux @ F1.5 (color), 0 lux (B/W with IR LEDs on) HB276HD4: 0.01 lux @ F1.3 (color), 0 lux (B/W with IR LEDs on)
S/N RATIO	65 dB or more
RESOLUTION	4 MP (2560 × 1440)
FRAME RATE	12,5/15 fps @ 4 MP; 25/30 fps @ 1080 p, 720p
VIDEO OUTPUT	1-channel BNC high definition video output; 1-channel BNC CVBS video output
IR LEDs	HB74HD4: 2; HB276HD4: 4
IR DISTANCE	HB74HD4: Up to 40 m (131 ft) HB276HD4: Up to 60 m (200 ft) *Depending on scene reflectance
DAY/NIGHT	Auto (ICR)/Color/BW
NOISE REDUCTION	2D/3D
LENS	HB74HD4: 3.6 mm Fixed HB276HD4: 2.7-12 mm MFZ VF
PRIVACY MASKING	Up to 8 configurable areas
HORIZONTAL ANGLE OF VIEW	HB74HD4: 79°; HB276HD4: 98°-26°
ELECTRICAL	
POWER SUPPLY	HB74HD4: 12 VDC ±25% HB276HD4: 12 VDC ±25% / 24 VAC ±25%
POWER CONSUMPTION	HB74HD4: 5.9 W max. (IR LEDs On) HB276HD4: 15.4 W max. (IR LEDs On)
MECHANICAL	
DIMENSIONS	HB74HD4: 181.0 × 74.0 × 70.0 mm (7.1 × 2.9 × 2.8 in.) HB276HD4: 214.8 × 79.7 × 73.4 mm (8.5 × 3.1 × 2.9 in.)
WEIGHT	HB74HD4: 0.4 kg (0.88 lb.) HB276HD4: 0.65 kg (1.43 lb.)
CONSTRUCTION	Die-cast aluminum
COLOR	RAL 9003 (White)

ENVIRONMENTAL	
OPERATING TEMPERATURE	-30°C to 60°C (-22°F to 140°F) *Startup should be done at above -30°C (-22°F)
STORAGE TEMPERATURE	-30°C to 60°C (-22°F to 140°F)
RELATIVE HUMIDITY	0-90%, non-condensing
INGRESS PROTECTION	IP66
REGULATORY	
EMISSIONS	EN 55032:2012+AC:2013
IMMUNITY	EN 50130-4:2011, EN 55024:2010
SAFETY	EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013
RoSH	EN 50581:2012
SYSTEM COMPATIBILITY	
HRHT	Hybrid 4 MP HQA DVRs
MOUNTS	
JUNCTION BOX	HB74HD4: HQA-BB1 HB276HD4: HBS2-BB
POLE MOUNT	HB74HD4: HQA-BB1+HQA-PM2 HB276HD4: HBS2-BB+HQA-PM2
CORNER MOUNT	HB74HD4: HQA-BB1+HB34S2-CM HB276HD4: HBS2-BB+HB34S2-CM

HB74HD4

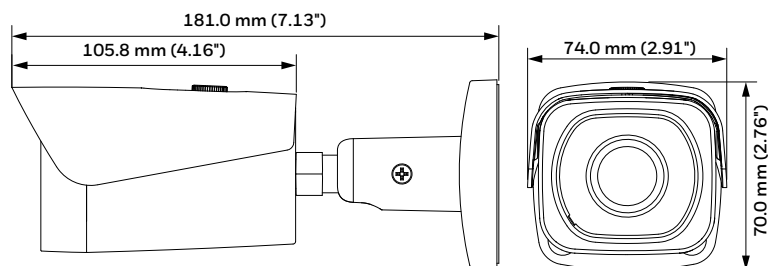

HB276HD4

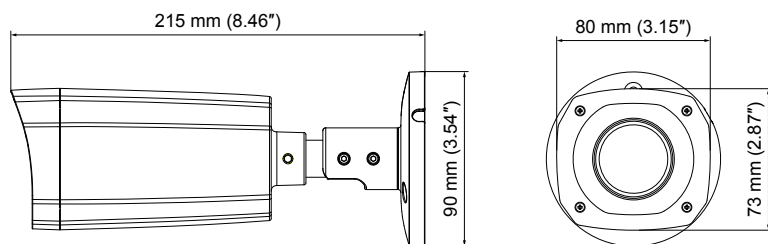

## ORDERING

HB74HD4	4 MP HQA WDR IR Bullet Camera, 1/3" 4.1 MP CMOS, 3.6 mm Fixed Lens, 2 High-Powered IR LEDs, 12 VDC
HB276HD4	4 MP HQA WDR IR Bullet Camera, 1/3" 4.1 MP CMOS, 2.7-12 mm MFZ VF Lens, 4 High-Powered IR LEDs, 12 VDC / 24 VAC

### For more information

[www.honeywell.com/security/uk](http://www.honeywell.com/security/uk)

### Honeywell Commercial Security

Aston Fields Road  
Whitehouse Industrial Estate  
Runcorn  
Cheshire WA7 3DL  
Tel: 08448 000 235  
[www.honeywell.com](http://www.honeywell.com)

Honeywell reserves the right, without notification, to make changes in product design or specifications.

HSV-HQABullet-02-UK(0519)DS-E  
© 2019 Honeywell International Inc.

**Honeywell**