

# HBW8PR2

Network WDR 8MP IR Bullet Camera






OPERATIONAL	
VIDEO STANDARD	NTSC/PAL
SCANNING SYSTEM	Progressive
IMAGE SENSOR	1/2" 8 Megapixel progressive CMOS
NUMBER OF PIXELS (H x V)	3840(H) x 2160(V)
MINIMUM ILLUMINATION	0.09lux/F1.9(color,30IRE), 0 Lux with IR ON
S/N RATIO	More than 45dB
ELECTRONIC SHUTTER SPEED	1/3~1/100000s
IR DISTANCE	Up to 60m (197ft), depending on scene reflectance
IR LIGHT CONTROL	Manual/SmartIR/OFF
IR LIGHT NUMBER	4
DAY/NIGHT	Auto (ICR) / Color / B&W
BACKLIGHT COMPENSATION	BLC / HLC / WDR
WHITE BALANCE	Auto/Natural/Street Lamp/Outdoor/Manual/Customized Region
GAIN CONTROL	0~100
WIDE DYNAMIC RANGE	120dB
NOISE REDUCTION	3D DNR
PRIVACY MASKING	Off / On (4 Areas, Rectangle)
MOTION DETECTION	Off / On (4 Zones, Rectangle)
REGION OF INTEREST	Off / On (4 Zones)
LENS	3.7mm~11mm, Motorized, F1.9
ANGLE OF VIEW	H: 113°~50°, V: 60°~28°
VIDEO	
VIDEO COMPRESSION	H.264/H.264B/H.264H/H.265/Smart Codec/MJPEG (Sub Stream)
RESOLUTION	4K(3840x2160)/6M(3072x2048)/5M(3072x1728)/5M(2592x1944)/4M(2688x1520)3M(2048x1536)/3M(2304x1296)/1080P(1920x1080)/1.3M(1280x960)/720P(1280x720) Sub Stream: D1(704x480/576)/VGA(640x480)/CIF(352x240/288)
FRAME RATE	Main Stream: 4K (1~25/30fps) Sub Stream: D1(1~25/30fps)
BIT RATE CONTROL	CBR/VBR
BIT RATE	4Kbps~15104Kbps

NETWORK	
ETHERNET	RJ-45 (10/100Base-T)
SUPPORTED WEB BROWSERS	Internet Explorer (11.0+)
SUPPORTED OS	Windows® 7 32-bit/64-bit; Windows® 10 32-bit/64-bit
PROTOCOLS*	HTTP; HTTPS; TCP; ARP; RTSP; RTP; RTCP; UDP; SMTP; DHCP; DNS; PPPoE; IPv4/v6; QoS; UPnP; NTP; Bonjour; IEEE 802.1x; Multicast; ICMP; IGMP; TLS
INTEROPERABILITY	ONVIF Profile S/G/Q
MAXIMUM USERS ACCESS	20 Users
SECURITY	User account and password protection HTTPS, IP Filter, Digest authentication, User access log, TLS1.2 only, AES-128/256, SSH/Telnet closed, sFTP by default, PCIDSS compliance
EVENT	No SD card, SD card error, Capacity warning, Network disconnection, IP conflict, Illegal access
MICRO SD	Up to 128 GB microSDHC card, Class 10 (not included)
ELECTRICAL	
POWER SUPPLY	DC12V PoE (802.3af)(Class 0)
POWER CONSUMPTION	<14.3W
MECHANICAL	
DIMENSIONS	Ø244.1mm×79mm×75.9mm (9.61"×3.11"×2.99")
PRODUCT WEIGHT	0.95kg (2.09lb)
PACKAGE WEIGHT	1.16kg (2.56lb)
CONSTRUCTION	Die-cast aluminum housing with powder coat
CONSTRUCTION COLOR	RAL 9003 (White)
ENVIRONMENTAL	
OPERATING TEMPERATURE	-30° C ~ +60° C (-22° F ~ +140° F)
RELATIVE HUMIDITY	Less than 95%, non-condensing
INGRESS PROTECTION	IP66
REGULATORY	
EMISSIONS	FCC Part 15B, EN 55032
IMMUNITY	EN 50130-4
SAFETY	UL 60950-1, EN 62368-1
ROHS	EN 50581

\* Some development may be required in specific user cases to support some of these protocols in the field as they mature over time.

# Network WDR 8MP IR Bullet Camera


## RECOMMENDED ACCESSORIES

SYSTEM COMPATIBILITY		MOUNTS AND ACCESSORIES	
HEN*4	8/16/32/64-channel Performance Series 4K NVRs (H.264 and H.265)	HB34S2-CM	 Corner Mount Adapter
HEN*3	4/8/16/32-channel Performance Series 4K NVRs (H.264 and H.265)	HQA-PM2	 Pole Mount Adapter
		HBS2-BB	 Junction Box

## ORDERING

HBW8PR2	Network WDR 8MP IR Bullet Camera, 1/2" CMOS, 3.7mm~11mm Motorized, 4 IR LEDs, PoE, IP66, H.265/H.264/Smart Codec
---------	--

## DIMENSIONS

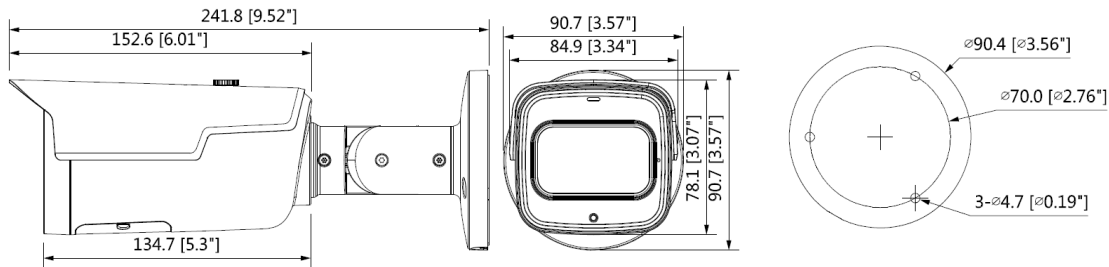

### For more information

[www.honeywellvideo.com](http://www.honeywellvideo.com)

Honeywell Security Office  
 Emaar Business Park, Sheikh Zayed  
 Road Building No. 2, 2<sup>nd</sup> Floor, 201  
 Post Office Box 232362  
 Dubai, United Arab Emirates  
 Tel: +971 44541704  
[www.honeywell.com](http://www.honeywell.com)

ONVIF and the ONVIF logo are trademarks of ONVIF Inc. Honeywell reserves the right, without notification, to make changes in product design or specifications.

HSV-HBW8PR2-01-US(1118)DS-Y  
 © 2018 Honeywell International Inc.

**Honeywell**