

equiP[®] Cameras

HBL6GR2-LPR



Network TDN Low-Light 2 MP IR LPR Rugged Bullet

OPERATIONAL		
Video Standard	NTSC/PAL	
Scanning System	Progressive scan	
Image Sensor	1/1.8" 6MP progressive CMOS (2MP used)	
Minimum Illumination	0.004 lux color @ F1.53, 0 lux B/W with IR LEDs on @ F1.53	
S/N Ratio	≥ 50 dB	
Electronic Shutter Speed	Auto, Manual, 1/30-1/100,000s	
IR Distance	Up to 164 ft. (50 m), depending on scene reflectance	
Day/Night	Auto (ICR)/Color/BW	
Backlight Compensation	BLC/HLC/DWDR/SSA	
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual/Customize Region	
Gain Control	Auto/Manual	
Noise Reduction	3DNR	
Privacy Masking	Up to 4 configurable areas	
Electronic Image Stabilization	Off/On	
Defog	Auto/Manual/Off	
Lens	4.1-16.4mm, MFZ, F1.53	
Angle Of View	Horizontal: 86° - 35°	
Audio/Two-Way	Line In/Out	
Alarm Input/Output	2/1	
Analog Output Support	BNC	
Ethernet	RJ-45 (100/1000Base - T)	
IP SPECIFICATIONS		
Video Compression	H.265/H.264/MJPEG; Bit rate control (CBR and VBR)	
Resolution	16:9	1080p (1920×1080)/720p (1280×720)
	4:3	1.3M (1280×960)/VGA (640×480)/CIF (352×288/352×240)
	Other	D1 (704×576/704×480)
Frame Rate	Main Stream	1080p (1920×1080)/1.3M (1280×1080)/720p (1280×720) at 1-25/30 fps
	Sub Stream	D1/CIF/VGA up to 25/30 fps
	Third Stream	1080p/720p/D1 up to 25/30 fps
Audio Compression	G.711a/G.711Mu/AAC/G.726	
Audio Stream	Full duplex, simplex	
Supported Web Browsers	Internet Explorer [®] (11.0+), Firefox, Chrome	
Supported OS	Windows [®] 7 32-bit/64-bit	
Compatibility	ONVIF Profile S, G and Q	
IP SPECIFICATIONS (CON'T)		

Supported Protocols*	IPv4/v6, TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, SSL, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP v2/v3, Bonjour, DNS, DDNS, IEEE 802.1x, QoS, NTP, IP Filter, Multicast, ONVIF
Maximum Users Access	20 users
Security	User account and password protection HTTPS, IP Filter, IEEE 802.1x, Digest authentication, User access log, TLS1.2, AES-256, SSH/Telnet closed, FTP disabled, PCI-DSS compliance, Hardware chipset for private key
Event	No SD card, SD card error, SD card capacity warning, Network disconnection, IP address conflict, Illegal access
Event Notification	Record (SD card and FTP), Relay output, Email, Snapshot
Analytics	Pre-installed and licensed for vehicle License Plate Recognition**.
Micro SD	Up to 128 GB microSDHC card, Class 10 (not included)
Micro SD Function	<ul style="list-style-type: none"> Event trigger recording Continuous and scheduled recording Automatic recording when network fails
Languages Supported By The User Interface	English, Arabic, Czech, Dutch, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Turkish
ELECTRICAL	
Power Supply	PoE+ (802.3at) Class 4, 12 VDC/24 VAC
AC Frequency	50/60 Hz
Power Consumption	18 W max. (IR LEDs on and motorized lens working)
MECHANICAL	
Dimensions (W×H×D)	4.3" × 4.1" × 11.1" (110 × 105 × 281mm)
Weight	Product: 4.9 lb. (2.2 kg); Package: 6.4 lb. (2.9 kg)
Construction	Die-cast aluminum housing with powder coat
Construction Color	RAL 9003 (White) and RAL 7022 (Grey)

* Some development may be required in specific user cases to support some of these protocols in the field as they mature over time.

** See VehicleTrace datasheet on <https://hwl.co/analytics> for more details.

NETWORK TDN LOW-LIGHT 2 MP IR RUGGED BULLET

ENVIRONMENTAL

Operating Temperature	-40°F to 140°F (-40°C ~ 60°C)
Relative Humidity	Less than 95%, non-condensing
Gore Vents	Yes
Ingress Protection	IP67
Impact Resistance	IK10

REGULATORY

Emissions	EN55032, ANSI C63.4-2014, ICE 003 Rev6, AS/NZ CISPR 32:2013
Immunity	EN50130-4
Safety	EU: EN60950-1, EN60950-22 North America UL listed to UL/CSA 60950-1, 60950-22
RoHS	EN50581

SYSTEM INTEGRATION





ONVIF support and open API software integration. Refer to www.onvif.org for the ONVIF specification and the Honeywell Open Technology Alliance website (<http://www.security.honeywell.com/hota/>) to learn more about our open and integrated solutions.



HONEYWELL DEVICE INTEGRATION

MAXPRO NVR FAMILY	Maxpro R600 and above
-------------------	-----------------------


OPTIONAL MOUNTS AND ACCESSORIES

HB4G-PM		Pole Mount Adapter
HB34G-CM		Corner Mount Adapter
HBG-BB		IP66 Back Box with Gasket (for Cable Termination)
HBG-FP		Front Lens Plate Replacement (if Vandalized)

ORDERING

HBL6GR2-LPR	Network TDN LPR HD IR Rugged Bullet Camera, 1/1.8*CMOS, 2MP, 4.1-16.4 mm MFZ, PoE+, H.265, with VehicleTrace pre-installed and licensed.
-------------	--

DIMENSIONS

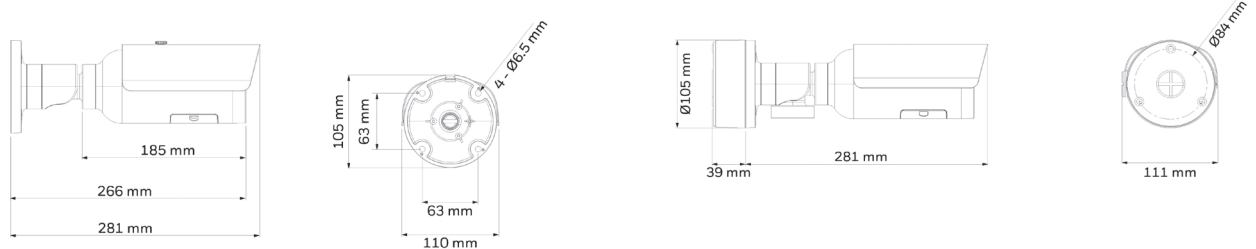

For more information

www.security.honeywell.com/uk
www.security.honeywell.com/me

Honeywell Commercial Security

Honeywell Security Office -
 Emaar Business Park, Sheikh Zayed Road
 Building No. 2, 2nd floor, 201
 Post Office Box 232362
 Dubai, United Arab Emirates
 Tel: +971 44541704

Honeywell Commercial Security

Aston Fields Road
 Whitehouse Industrial Estate
 Runcorn, Cheshire, WA7 3DL
 United Kingdom
 Tel: +44 (0)8448 000 235
www.honeywell.com

ONVIF and the ONVIF logo are trademarks of ONVIF Inc. Honeywell reserves the right, without notification, to make changes in product design or specifications.

HSV-HBL6GR2-LPR-04-UK(1219)DS-Z
 © 2019 Honeywell International Inc.

