

## Model UBP

### Universal Bi-Polar In-Line Amplifier



#### DESCRIPTION

The Model UBP bi-polar amplifier supplies a highly regulated bridge excitation voltage for the transducer and converts the millivolt signal of the transducer to a  $\pm 5$  Vdc signal. The Universal In-line features two selectable excitation voltages, programmable gain settings, a wide adjustment range on the zero, and a buffered solid-state shunt cal relay for quick calibration.

#### FEATURES

- For replacement only, not to be used in new design
- Strain gage sensor amplifier
- $\pm 5$  Vdc output
- $\pm 15$  Vdc supply voltage
- NEMA 4 housing
- Selectable excitation voltages: 3 V, 5 V, or 10 V @ 70 mA
- Increases signal-to-noise ratio in noisy environments
- Effects of voltage drops in excitation sources are eliminated
- Signals may be sent to the data systems from low impedance sources

# Model UBP

## PERFORMANCE SPECIFICATIONS

Characteristic	Measure
Number of channels	1
Case material	Plastic or painted Aluminum
Mounting	Use #6 or #8 screws

## ENVIRONMENTAL SPECIFICATIONS

Characteristic	Measure
Temperature, operating	-15 °C to 71 °C [5 °F to 160 °F]
Sealing	IP66 or NEMA 4

## TRANSDUCER INTERFACE

Characteristic	Measure
Transducer type	Bridge-based sensor
Transducer excitation	3 Vdc, 5 Vdc or 10 Vdc @ 70 mA

## AMPLIFIER CHARACTERISTICS


Characteristic	Measure
Supply voltage	±15 Vdc
Current draw	70 mA
Frequency response (-3 db)	dc to 5000 Hz
Zero adjustment range, coarse	±50 %
Zero adjustment range, fine	±15 %
Span adjustment range	0.5 mV/V to 10 mV/V, ±25 % fine
Linearity	0.01 % of full scale
Shunt calibration	Solid state relay on board
Signal output	±5 Vdc
Output current	1 mA max.
Signal-to-noise ratio	65 db
dc power supply rejection ratio	> 110 db
Signal-to-noise ratio	65 db
dc power supply rejection ratio	> 110 db

Not RoHS compliant


## OPTION CODES

<b>2-pole active filter</b>	Many range/option combinations are available in our quick-ship and fast-track manufacture programs. Please see <a href="http://sensing.honeywell.com/TMsensor-ship">http://sensing.honeywell.com/TMsensor-ship</a> for updated listings.	
Filter setting	1 Hz	50 Hz
	3 Hz	100 Hz
	5 Hz	300 Hz
	10 Hz	500 Hz
	20 Hz	1000 Hz
	30 Hz	

## MOUNTING DIMENSIONS AND CHARACTERISTICS

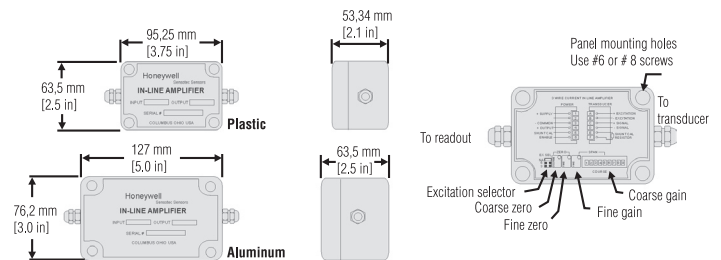

## TYPICAL SYSTEM DIAGRAM

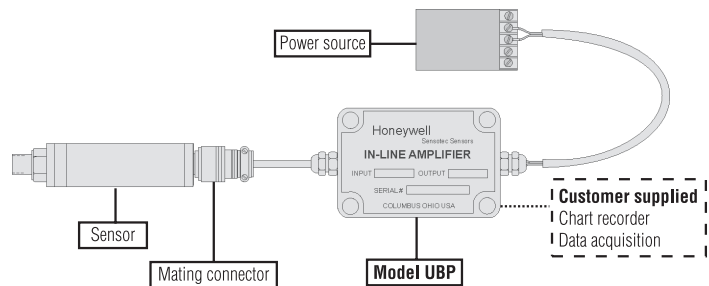

**Warranty.** Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

For more information about Sensing and Control products, visit [www.honeywell.com/sensing](http://www.honeywell.com/sensing) or call +1-815-235-6847  
Email inquiries to [info.sc@honeywell.com](mailto:info.sc@honeywell.com)

**⚠ WARNING**  
**PERSONAL INJURY**

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

**⚠ WARNING**  
**MISUSE OF DOCUMENTATION**

- The information presented in this catalogue is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**