

# BG-12LR and BG-12LRA

## Dual-Action Agent Release Stations



### Releasing Panels

#### General

The BG-12LR and BG-12LRA are Agent Release Stations designed for use with Fire-lite Fire Alarm Control Panels with releasing capabilities and RP Series Releasing Systems.

#### Features

- Non-coded, dual-action operation.
- Made with durable polycarbonate.
- Optional surface backbox.

#### BG-12LRA INCLUDES:

- Abort switch.
- Power-on indication.
- Released indication.
- Manual release (dual-action).

#### BG-12LR INCLUDES:

- Dual-action release only.

#### Applications

The BG-12LRA and BG-12LR are ideal for areas such as clean rooms and computer rooms where a chemical agent is used to extinguish a fire.

#### Product Line Information

**BG-12LRA:** Agent release station with abort switch, Release LED, Normal LED.

**BG-12LR:** Dual-action agent release station.

**SBA-10:** Surface backbox for BG-12LRA, metal. Dimensions 4.5" (11.43 cm) W x 8.188" (20.8 cm) L x 1.375" (3.49 cm) D.

**SB-10:** Surface backbox for BG-12LR, metal. Dimensions 4.125" (10.48 cm) W x 5.5" (13.97 cm) L x 1.375" (3.49 cm) D.

**SB-I/O:** Surface backbox for BG-12LR, plastic.

**BG12TR:** Optional trim ring for semi-flush mounting.

#### Agency Listings and Approvals

In some cases, certain modules may not be listed by certain approval agencies, or listing may be in progress. *Consult factory for latest listing status.*

**UL/ULC Listed:** S711

**MEA Listed:** 67-20-E

**FM Approved**

**CSFM:** 7150-0075:184




Dual Action BG-12LR




Dual Action BG-12LRA (shown activated)

## Wiring

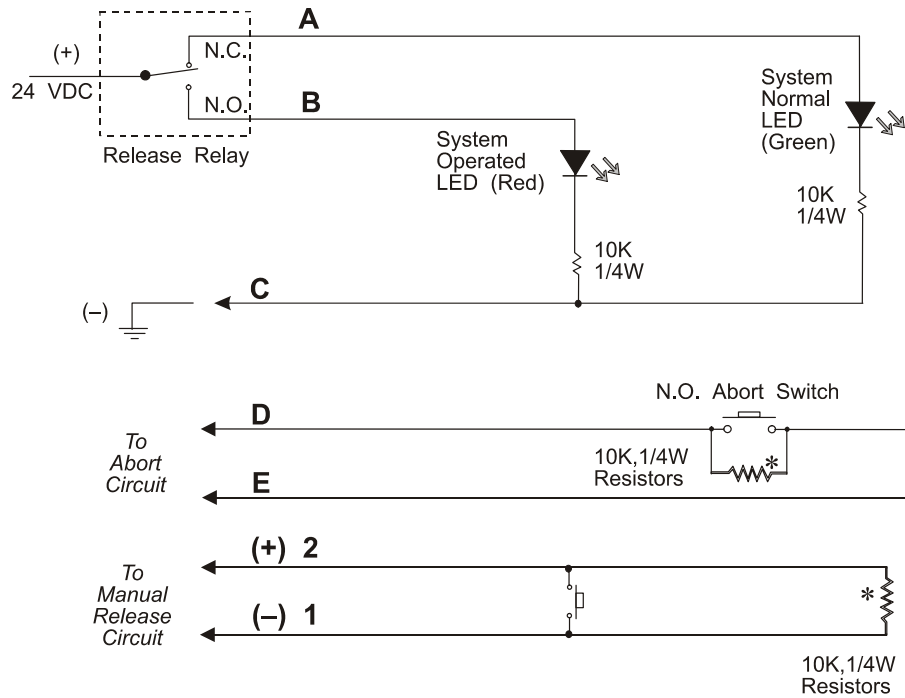

### Mount End-of-Line Resistor on the last unit.

Mount 4.7K ELR on the last unit when abort switch and manual release switch are connected to control panel circuits. Mount 47K resistor on last unit when abort switch and manual release switch are connected to monitor module or control module. Refer to control panel manual for the listed ELR. Refer to the product installation documentation for connection to the control panel

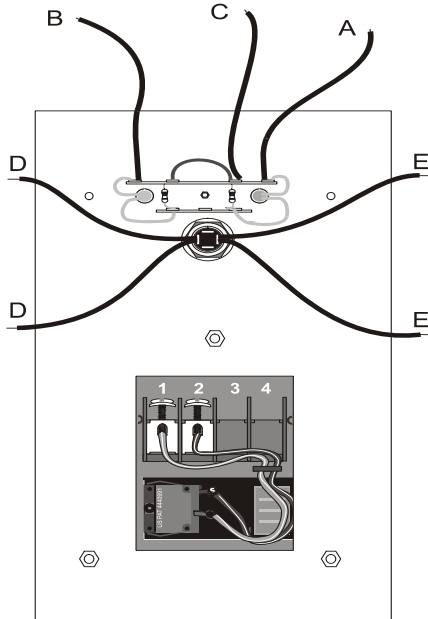

**BG-12LRA (Rear view) Agent Release Pull Station**

Fire•Lite® Alarms is a registered trademark of Honeywell International Inc. Bayblend® is a registered trademark of Bayer Corp. ©2010 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
 We try to keep our product information up-to-date and accurate.  
 We cannot cover all specific applications or anticipate all requirements.  
 All specifications are subject to change without notice.



For more information, contact Fire•Lite Alarms. Phone: (800) 627-3473, FAX: (877) 699-4105.  
[www.firelite.com](http://www.firelite.com)