

## Xtralis® VESDA® VLS

The Xtralis VESDA VLS is similar to the standard Xtralis VESDA VLP detector, but also includes a valve mechanism in the inlet manifold and software to control the airflow from the four sectors (pipes). This configuration enables a single VESDA zone to be divided into four separate sectors, for example, distinguishing between separate voids within a room.



### How It Works

The VLS draws air from all sectors in use. If the smoke level reaches the Adaptive Scan Threshold, the VLS quickly scans each pipe to identify which pipe is carrying smoke. If more than one pipe is transporting smoke, the sector with the highest smoke concentration is designated as the First Alarm Sector (FAS).

Once Fast Scan is completed and the FAS identified, the VLS continues to closely monitor all four sectors (pipes) to monitor fire growth and maintain full protection of the area.

There are four alarm levels (Alert, Action, Fire 1 and Fire 2) for each sector (pipe) and the sensitivity for each alarm level can be set to ensure the optimum alarm thresholds are applied for each sector.

### The VLS Display

The VLS display has a bar graph to indicate the overall smoke level, alarm threshold and fault indication. The bar graph displays the individual sector smoke levels during the scanning sequence. There is an extra LED to indicate that a First Alarm Sector (FAS) has been identified and an extra function to the Silence Button to allow for Manual Scan to be initiated.

The VLS display module can be mounted into the VLS front cover or remotely into a 19in subrack or a remote box.

### Relay Options

The VLS detector can be fitted with a programmable 7 or 12 relay Termination card. Relays may be mounted in a remote box or in a 19in subrack.

### VESDAnet™

The status of the detector, and all alarm, service and fault events, are transmitted to displays and external systems via VESDAnet, Xtralis VESDA's fault tolerant communications protocol. The VESDAnet loop provides a robust bi-directional communication network between devices, even allowing continued operation during single point wiring failures. It also provides system programming from a single location and forms the basis of the modular nature of the Xtralis VESDA system.

### AutoLearn™ and Referencing

The VLS has both the AutoLearn™ and Referencing software functions to ensure optimum operation in different environments and to eliminate the occurrence of nuisance alarms.

AutoLearn monitors the ambient environment and sets the most appropriate alarm thresholds (Alert, Action, Fire 1, Fire 2) during the commissioning process.

Referencing ensures external pollution to a protected environment does not interfere with the true smoke level being detected.

### Features


- Individual pipe identification
- Adaptive Scan Threshold
- Wide sensitivity range
- Laser based smoke detection
- VESDAnet™ communication
- 4 alarm levels per sector
- High efficiency aspirator
- Clean air barrier optics protection
- Easy to replace air filter
- 7 or 12 programmable relays option
- AutoLearn™
- Referencing
- Event log
- Recessed mounting

### Listings/Approvals


- UL
- ULC
- FM
- LPCB
- VdS
- CFE
- ActivFire
- AFNOR
- VNIPO
- CE - EMC and CPD
- EN54-20

Regional approvals listings and regulatory compliance vary between Xtralis VESDA product models. Refer to [www.xtralis.com](http://www.xtralis.com) for the latest product approvals matrix.

# Xtralis® VESDA® VLS



Detector Mounting Box

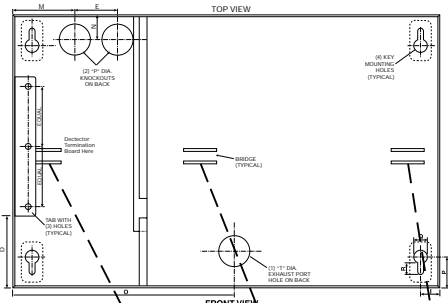


| Dimensions |      | Dimensions |      |
|------------|------|------------|------|
| mm         | in   | mm         | in   |
| A          | 350  | L          | 23.8 |
| B          | 225  | M          | 51   |
| C          | 70   | N          | 21   |
| D          | 57   | O          | 141  |
| E          | 35   | P          | 25.4 |
| F          | 44.5 | Q          | 11.1 |
| G          | 22.2 | R          | 9.5  |
| H          | 141  | S          | 28.5 |
| I          | 15.9 | T          | 30.2 |
| J          | 33.3 | U          | 3.2  |
| K          | 34   |            |      |


Detector Surface Mounting Bracket

| Dimensions |       |
|------------|-------|
| mm         | in    |
| A          | 337.3 |
| B          | 130.8 |
| C          | 14.5  |
| D          | 70.6  |
| E          | 50.8  |
| F          | 10.0  |
| G          | 47.62 |
| H          | 6.35  |

Detector Termination Card  
12 Relay Version

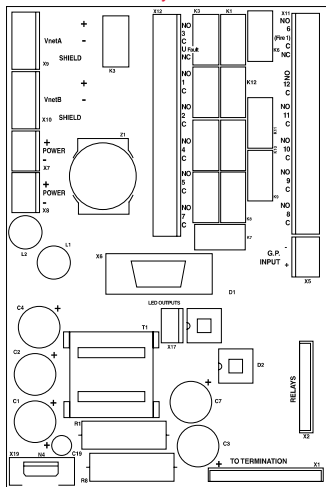

Detector Termination Card  
7 Relay Version

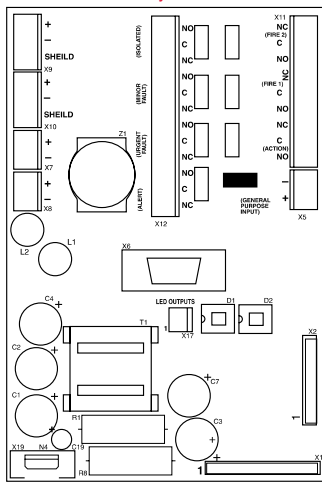

## Specifications

Supply Voltage: 18–30 VDC

Power Consumption @ 24 VDC: No Display or Programmer

|         | Aspirator @ 3000 rpm |            | Aspirator @ 4200 rpm |            |
|---------|----------------------|------------|----------------------|------------|
|         | Quiescent            | With Alarm | Quiescent            | With Alarm |
| Power   | 5.8 W                | 6.24 W     | 6.72 W               | 7.2 W      |
| Current | 240 mA               | 260 mA     | 280 mA               | 300 mA     |

Dimensions (WHD):

13.8 in x 8.9 in x 4.9 in (350 mm x 225 mm x 125 mm)

Weight:

9 lbs (4.0 kg) including Display and Programmer modules

Operating Conditions:

Tested to: 14°F to 131°F (-10°C to 55°C)

Detector Ambient: 32°F–103°F (0°C–39°C) (Recommended)

Sampled Air: -4°F–140°F (-20°–60°C)

Humidity: 10%–95% RH, non-condensing

Please consult your Xtralis office for operation outside these parameters or where sampled air is continually above 0.015% obs/ft (0.05% obs/m) under normal operating conditions.

Sampling Network:

Aggregate pipe length: 650 ft (200 m)

Pipe Modelling Design Tool: ASPIRE2™

Pipe Size:

Minimum flow per pipe 15 liters/min.

External Diameter 1 in (25 mm)

Internal Diameter 9/16 in–7/8 in (15–21 mm)

Programmable Relays:

7 or 12 Relays option

Contacts rated 2 A @ 30 VDC

Default: 7 Relays: NO/NC contacts Alert, Action, Fire 1, Fire 2, Maintenance, Urgent Fault & Isolate

Default: 12 Relays: 10 x NO, 2 x NO/NC contacts Alert, Action, Fire 1, Fire 2, Maintenance, Urgent Fault & Isolate, First Alarm Sector 1 to 4 and Scan

IP Rating: IP30

Cable Access: 8 x 1 in (25 mm) knockouts in various positions

Cable Termination:

Screw terminals 30–12 AWG (0.2–2.5 sq mm)

Sensitivity Range: 0.0015%–6% obs/ft (0.005%–20% obs/m)

Alarm Threshold Setting Range:

Alert: 0.0015%–0.6218% obs/ft (0.005%–1.990% obs/m)

Action: 0.0031%–0.6234% obs/ft (0.010%–1.995% obs/m)

Fire 1: 0.0046%–0.625% obs/ft (0.015%–2.00% obs/m)

Fire 2: 0.0062%–6.25% obs/ft (0.020%–20.00% obs/m)\*

\*Limited to 4% obs/ft (12% obs/m) in UL mode

Software Features:

Event Log: Up to 18,000 events stored on FIFO basis.

AutoLearn: Minimum 15 minutes, maximum 15 days.

Recommended minimum period 1 day. During AutoLearn thresholds are NOT changed from pre-set values.

Referencing: Compensation for external ambient conditions.

Four Alarm Levels (per sector pipe): Alert, Action, Fire 1 & Fire 2.

Two Fault Warning Levels: Maintenance and Major fault.


Software Programmable Relays: 7 or 12.

Maintenance Aids: Filter & Flow monitoring.

Event reporting via VESDAnet or Event Log.

Adaptive Scan Threshold: Detector selects the appropriate scan threshold automatically.

Ordering Information:



Remote Programmer

Recessed Mounting Kit (Optional)

Hand-held Programmer

19 in Sub Rack Configuration

VRT-100

VSP-011

VHH-100

contact Xtralis

www.xtralis.com

The Americas +1 781 740 2223 Asia +852 2297 2438 Australia and New Zealand +61 3 9936 7000  
Continental Europe +41 55 285 99 99 UK and the Middle East +44 1442 242 330

The contents of this document are provided on an "as is" basis. No representation or warranty (either express or implied) is made as to the completeness, accuracy or reliability of the contents of this document. The manufacturer reserves the right to change designs or specifications without obligation and without further notice. Except as otherwise provided, all warranties, express or implied, including without limitation any implied warranties of merchantability and fitness for a particular purpose are expressly excluded.

This document includes registered and unregistered trademarks. All trademarks displayed are the trademarks of their respective owners. Your use of this document does not constitute or create a license or any other right to use the name and/or trademark and/or label.

This document is subject to copyright owned by Xtralis AG ("Xtralis"). You agree not to copy, communicate to the public, adapt, distribute, transfer, sell, modify or publish any contents of this document without the express prior written consent of Xtralis.

Doc. no. 13235\_12

Part: 17920



## GAMEWELL-FCI

12 Clintonville Road, Northford, CT 06472-1610 USA • Tel: (203) 484-7161 • Fax: (203) 484-7118  
GF13235\_12 page 2 of 2 www.gamewell-fci.com