

CMF-300-6(A)

Six Circuit Supervised Control Module

Addressable Devices

General


FireLite's CMF-300-6 six-circuit supervised control module provides intelligent alarm systems with supervised monitoring of wiring to load devices that require an external power supply to operate, such as horns, strobes, or bells. Each module is intended for switching applications involving AC or DC which require wiring supervision. Upon command from the control panel, the CMF-300-6 will disconnect the supervision and connect the external power supply across the load device.

The first module is addressed from 01 to 154 (MS-9600 series only) while the remaining modules are automatically assigned to the next five higher addresses. On an MS-9050UD, MS-9200, or MS-9200UDLS, the addressing would be 01 to 94. Each CMF-300-6 module has terminals for connection to an external supply circuit for powering devices on its notification appliance circuit (NAC). One or multiple power supplies may be used.

NOTE: Provisions are included for disabling a maximum of three unused addresses for Class B and two for Class A.

Each CMF-300-6 module features a short-circuit-protection monitor to protect the external power supply against short-circuit conditions on the NAC. When an alarm condition occurs, the relay which connects the external supply to the NAC will not be allowed to close if a short-circuit condition currently exists on the NAC. Additionally, an algorithm is incorporated to find shorts when the module is active. The CMF-300-6 module will close all circuits that are not shorted to find the NAC with the problem.

Each CMF-300-6 module has panel-controlled green LED indicators. The panel can cause the LEDs to blink, latch on, or latch off. The SYNC-1A accessory card provides the CMF-300-6A with additional functionality with compatible System Sensor® SpectrAlert® and SpectrAlert Advance® audio/visual devices. The module will close all circuits that are not shorted to find the NAC with the problem.

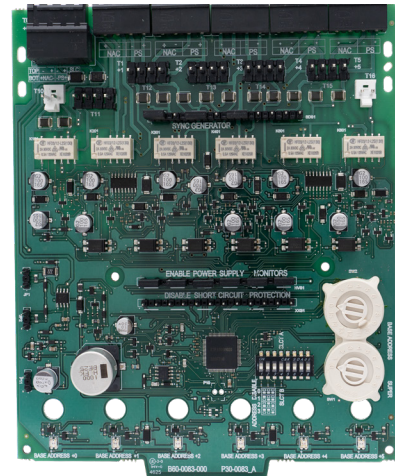

Specifications

Standby current: 2.25 mA (SLC current draw with all addresses used; if some addresses are disabled, the standby current decreases).

Alarm current: 35 mA (assumes all six NACS have been switched once and all six LEDs solid ON).

Temperature range: 32°F to 120°F (0°C to 49°C) for UL applications.

Humidity: 10% to 85% noncondensing for UL applications;

Dimensions: 6.8" (172.72 mm) high x 5.8" (147.32 mm) wide x 1.25" (31.75 mm) deep.

Shipping weight: 1.1 lb. (0.499 kg) including packaging.

Mounting options: CHS-6 chassis, BB-6F cabinet, BB-25 cabinet, BB-2F cabinet.

Wire gauge: 12 AWG (3.31 mm²) to 18 AWG (0.821 mm²), grounded.

CMF-300-6 is shipped in Class B position; use DIP switch to select Class A operation.

FEATURES & BENEFITS

- Six addressable Class B (DCLB) or three addressable Class A (DCLA) outputs that function as notification appliance/telephone circuits.
- Removable 12 AWG (3.31 mm²) to 18 AWG (0.821 mm²) plug-in terminal blocks.
- Status indicators for each point. Unused addresses may be disabled.
- Rotary address switches.
- LiteSpeed® or CLIP operation.
- Mount one or two modules in a BB-2F cabinet (optional).
- Mount up to six modules on a CHS-6 chassis in a BB-6F or BB-25 cabinet (optional).
- Mounting hardware included.

CMF-300-6A is shipped in DCLB position; use DIP switch to select DCLA operation.

Maximum SLC wiring resistance: 40 ohms on MS-9600 series, MS-9200UDLS, MS-9050UD, and MS-9200.

Maximum NAC wiring resistance: 40 ohms.

Power rating per circuit: to 50 W @ 70.7 VAC; 50 W @ 25 VAC (UL applications only).

Relay contact ratings: 30 VDC, 110 VAC

Current ratings:

- 3.0 A @ 30 VDC maximum, resistive, non-coded.
- 2.0 A @ 30 VDC maximum, resistive, coded.
- 1.0 A @ 30 VDC maximum, inductive (L/R = 2 ms), coded.
- 0.5 A @ 30 VDC maximum, inductive (L/R = 5 ms), coded.
- 0.9 A @ 70.7 VAC maximum, resistive, non-coded.
- 0.7 A @ 70.7 VAC maximum, inductive (PF = 0.35), non-coded.

Compatible Devices: See the documentation for your panel, and the Fire-Lite Device Compatibility document. Contact Fire-Lite.

Product Line Information

CMF-300-6: Six-circuit supervised control module.

CMF-300-6A: Same as above with ULC Listing.

SYNC-1A: Optional accessory card for synchronization of compatible ULC System Sensor SpectrAlert horns, strobes and horn/strobes.

BB-2F: Optional cabinet for one or two modules. Dimensions, DOOR: 9.234" (23.454 cm) wide (9.484" [24.089 cm] including hinges), x 12.218" (31.0337 cm) high, x 0.672" (1.7068 cm) deep; BACKBOX: 9.0" (22.860 cm) wide (9.25" [23.495 cm] including hinges), x 12.0" (30.480 cm) high x 2.75" (6.985 cm); CHASSIS (installed): 7.150" (18.161 cm) wide overall x 7.312" (18.5725 cm) high interior overall x 2.156" (5.4762 cm) deep overall.

BB-6F: Optional cabinet for up to six modules mounted on CHS-6 chassis (below). Dimensions, DOOR: 24.0" (60.96 cm) wide x 12.632" (32.0852 cm) high, x 1.25" (3.175 cm) deep, hinged at bottom;

BACKBOX: 24.0" (60.96 cm) wide x 12.550" (31.877 cm) high x 5.218" (13.2537 cm) deep.

CHS-6: Chassis, mounts up to six modules in the BB-6F cabinet.

Agency Listings and Approvals

These listings and approvals apply to the modules specified in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- UL Listed: S2424
- ULC Listed: S2424
- ETL Listed
- FM Approved (Local Protective Signaling)
- Maryland State Fire Marshal: Permit # 2106 (CMF-300-6)

This document is not intended to be used for installation purposes.

We try to keep our product information up-to-date and accurate.

We cannot cover all specific applications or anticipate all requirements.

All specifications are subject to change without notice.

For more information, contact Fire•Lite Alarms. Phone: (800) 627-3473,

FAX: (877) 699-4105.

www.firelite.com

LiteSpeed®, FireLite® Alarms, SpectrAlert®, SpectrAlert Advance®, and System Sensor® are registered trademarks of Honeywell International Inc. ©2025 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.

Made in Mexico

