6500 / 6500RS

Conventional Reflective Beam Detector

Section: Conventional Devices

FEATURES

- **Combined transmitter and receiver unit**
- **Suitable for connection to a conventional zone**
- **Range 10-100 metres**
- **4 fixed sensitivity/ threshold adjustment**
- **2 automatic variable sensitivity modes**
- **Numerical indicators to aid beam alignment**
- **Fault and alarm LED indicators**
- **Integral horizontal and vertical beam alignment**
- **Drift compensation**
- **Complies with EN54-12**
- **Unique servo operated test filter (6500RS)**
- **3 year warranty**

GENERAL

The 6500 and 6500RS are conventional reflector type linear optical beam smoke detectors designed to operate as a component of an conventional fire alarm system. It operates primarily on the principle of light obscuration utilising infra-red light. Optical beam smoke detectors are particularly appropriate for protecting buildings with large open spaces such as warehouses, atriums etc.


The 6500 and 6500RS detectors are combined transmitter/receiver units, which can be directly connected to a conventional zone and require a resetable 24Vdc power supply. The Infra-Red transmitter generates a beam of light towards a high efficiency reflector. The reflector returns the beam to the receiver where an analysis of the received signal is made. The change in the strength of the received signal is used to determine the alarm condition.



INSTALLATION

Each beam detector set is supplied with a reflector for up to 70 Metres measuring just 20cm's x 23cm's. A kit comprising of 3 additional reflectors is also available, extending the range to 100 Metres.

Alignment of the detector is simplified with the aid of the detector's "gunsight" targeting device. Alignment of the detector with the reflector can then be "fine tuned" with the aid of a numerical signal strength indicator.

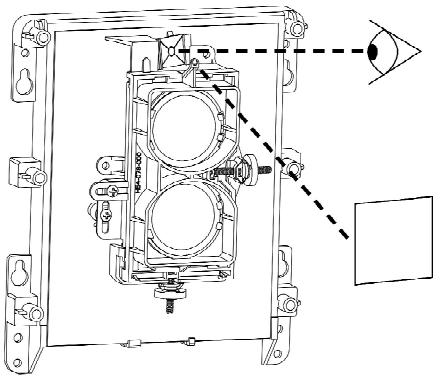

This document is not intended to be used for installation purposes. Every care has been taken in the preparation of this document but no liability can be accepted for the use of the information therein. Design features may be changed or amended without prior notice. For more information, contact **NOTIFIER.**
Charles Avenue, Burgess Hill, West Sussex, RH15 9UF. United Kingdom
Phone: +44 (0) 1444 230 300 Fax: +44 (0) 1444 230 888


ISO9001
Design, Manufacture and Supply to Quality Management Systems Certified to ISO9001:1994

Quality Systems Certificate No. 154
Assessed to ISO9001


Testing of beam detectors when positioned at height presents some interesting challenges. The 6500RS features a unique remote test capability that fully tests both the optics and the electronics of the device. An optical filter is automatically introduced in front of the optics, attenuating the returned beam and causing the unit to go into alarm. This allows a test facility to be placed at low level, negating the requirement to gain access to the typically high level beam to perform routine testing.




The sensitivity of the detector can be set to between 25% and 50% obscuration, providing application flexibility to suit the environment and protected distances in which the detector will be installed.

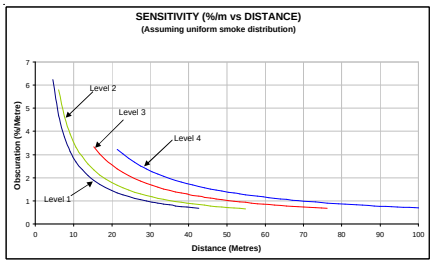


In addition to the four fixed value alarm thresholds, there are two variable thresholds that automatically compensate for changes in the environment. These changes, for which the beam detector adjusts, could otherwise result in unwanted alarms whilst it remains within a known sensitivity range. The beam detector uses advanced algorithms to sample the environment and to adjust its sensitivity and alarm thresholds automatically. This provides optimum sensitivity within an unstable environment.

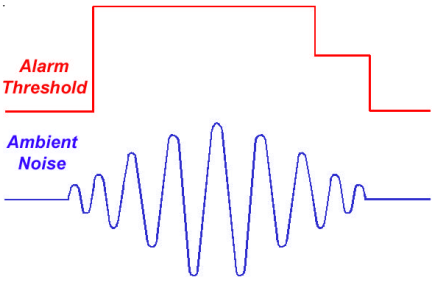

The detector incorporates automatic drift compensation, whereby the detector will adjust its detection thresholds in line with any long term signal reduction of the beam caused by contamination of the optical surface.

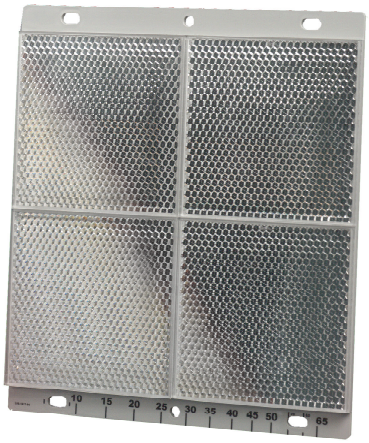


Wall Mounting

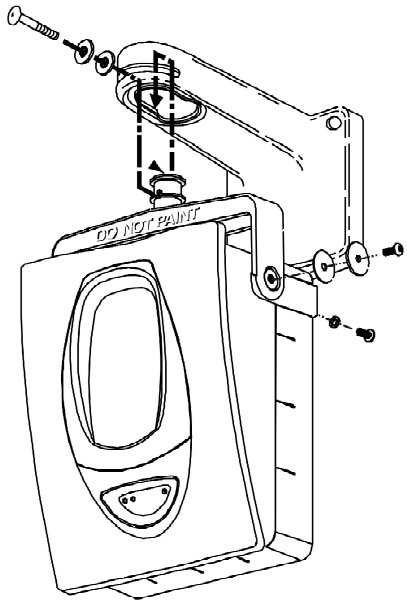

The detector can be adjusted up to 10° vertically and horizontally for alignment. Where greater angular adjustment is required, the multi-mount accessory enables the detector to move through 28° vertically and 360° horizontally when ceiling mounted or up to 23° vertically and 90° horizontally when wall mounted. The Surface Mount Kit must also be used for this configuration.


Ceiling Mounting

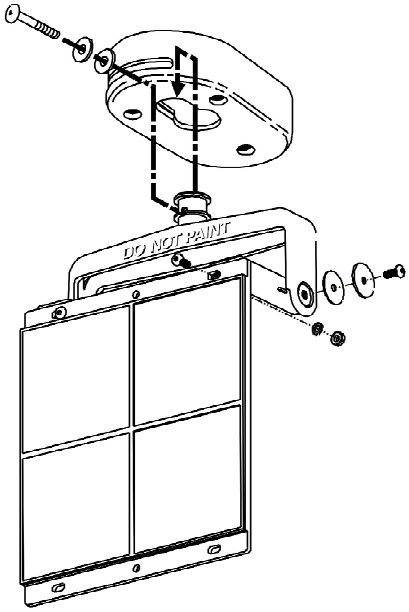


SPECIFICATIONS

- **Dimensions**
  - ✓ Height: 254mm
  - ✓ Depth: 84mm
  - ✓ Width: 90mm
  - ✓ Weight: 1.77Kg
- **Current Consumption**
  - ✓ Typical Standby : 17mA @ 24Vdc
  - ✓ Maximum Fault Current : 8.5mA @ 24Vdc
  - ✓ Maximum Alarm Current : 38.5mA @ 24Vdc
  - ✓ 6500RS Test Mode: 500mA peak
- **Operating Voltage**
  - ✓ Operating Voltage Range 6500 : 10.2 to 32Vdc (24Vdc Nominal)
  - ✓ Operating Voltage Range 6500RS : 15 to 32Vdc (24Vdc Nominal)
- **Environmental Limits**
  - ✓ Operating Tempurature Range : -30°C to +55°C
  - ✓ IP Rating : IP54
  - ✓ Humidity : 0% to 95%, non-condensing relative humidity

KEY INTERNAL FEATURES

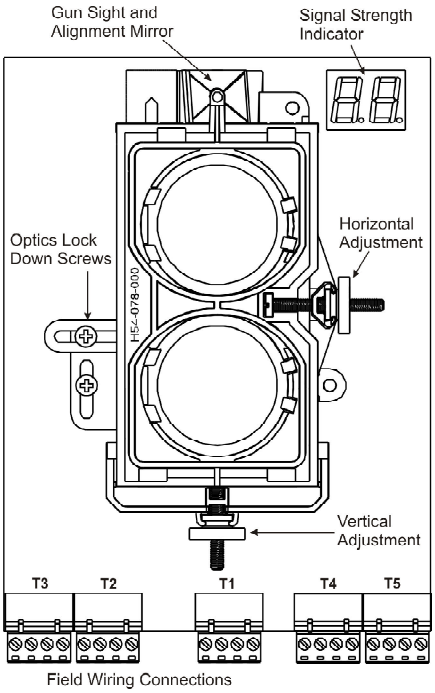

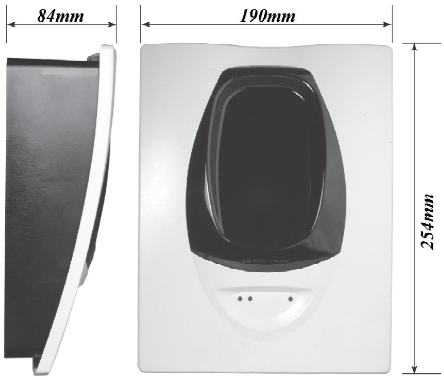

ORDERING INFORMATION

Part No.	Description
6500R	Conventional reflective IR beam detector, complete with reflector for up to 70 Metres. Use BEAM-LRK for 70 to 100 Metres.
6500RS	Conventional reflective IR beam detector, complete with reflector for up to 70 Metres. Use BEAM-LRK for 70 to 100 Metres. Unit supplied with servo test facility.

Accessories:

BEAM-SMK	Surface Mount Kit for IR reflective beam. Allows direct surface cable entry.
BEAM-MMK	Multi Mount Kit for IR reflective beam. Provides ceiling and wall mount swivel brackets. Note : requires BEAM-SMK.
BEAM-LRK	Long range reflector kit for 70 to 100 metres.

BEAM-SMK



Wiring Diagram

Note : A = A suitable Alarm Resistor for the connected panel
B = Schottky Diode for use with systems that support device removal
Resettable 24 Vdc required or local reset facility should be used.

