

## HCX5DW2 Camera

### 5 MEGAPIXEL TRUE DAY/NIGHT NETWORK CAMERA

Honeywell's HCX series of megapixel cameras offers world-class video and leading-edge IP networking technologies. When object recognition is needed over a vast field of view, one megapixel camera can often do the same job as several standard analogue cameras. Megapixel technology increases the effectiveness of your security system by providing greater detailed images while saving on installation and equipment costs.

The HCX5DW2 is a megapixel true day/night network camera with a movable IR cut filter that offers up to 5 MP (2560 X 1920) with frame rates up to 30 frames per second. It adapts to varying lighting conditions to ensure the highest picture quality even in low-light conditions down to 0.05 lux. User selectable exposure windows optimise video performance in the areas of interest. More detailed viewing can be performed using the digital PTZ control.

The HCX5DW2 network camera includes advanced bandwidth management tools to optimise performance over any network. A built-in Web server provides password protected access to video and network set-up. Set-up is quick and easy and can be customised through a Web client or from an NVR multi-zone motion detection to trigger motion-based video streaming and privacy zones for blocking portions of the scene that are not to be recorded. An analogue output facilitates set-up of zoom and focus of the lens using spot monitors and allows easy integration with public view monitors. Choose between 12 VDC/24 VAC power input or PoE 802.3 af for additional installation flexibility.

### Market Opportunities

The HCX5DW2 provides optimum performance for both indoor and outdoor applications requiring higher resolution over a larger field of view than is available from a high resolution analogue camera. Retail and banking industries greatly benefit from using megapixel cameras. When fraud is suspected or transactions are being audited, the operator can position the camera to view the complete till transaction process and zoom in to capture the 'customer's' identifying features. Other applications include multi-lane carriageways, wide lobbies, gated entrances and loading bays.

### Features

- 1/2" progressive scan imager
- Up to 2560 X 1920 pixel resolution
- Excellent true day night low light performance, down to 0.3 lux colour/0.05 lux BW.
- Up to 30 fps at 1.3 MP<sup>1</sup>
  - 20 fps at 2.0 MP
  - 12 fps at 3.1 MP
  - 8 fps at 5.0 MP
- Includes 4.5 mm to 13 mm F1.8, IR corrected Vari-Focal Fixed Iris lens
- Full time analogue video output
- MJPEG compression
- Alarm I/O
- Multi-zone motion detection
- E-mail notification of alarms or motion events
- Digital image cropping
- User selectable exposure window
- Password protection prevents unauthorised users from altering system settings
- Web server for remote set-up of camera video and network parameters
- 12 VDC/24 VAC or PoE 802.3 af choice of power inputs

<sup>1</sup> with image cropping




# HCX5DW2 Camera

## SPECIFICATIONS

Operational	
Image Sensor	1/2" CMOS imager, progressive scan
Minimum Illumination	0.3 lux colour/0.05 lux BW
S/N Ratio	50 dB or more (AGC off)
Auto Gain Control	Peak detect, dark detect, clip average, average
Automatic Electronic Shutter	1/5–1/10,000 sec
Gamma	0.45
White Balance	Automatic
Digital Slow Shutter	1X – 4X
Analogue Video Output	NTSC/PAL (full time analogue output) 1.0 Vp-p @ 75 Ohms
Motion Detection	Multi-zone Include/Exclude
Exposure Window	Include, variable size
Privacy Zones	Multiple exclude zones
Electrical	
Input Voltage	12 VDC/24 VAC, PoE 802.3 af
Input Range	12-24 VDC, 22-26 VAC
Surge Suppression	1.5 kW transient
Power Consumption	2.5 W (max)
Mechanical	
Dimensions	See Diagram
Weight	0.36 kg camera only
Construction	Housing: Aluminium Finish: Grey Painted
Connector	Video Output: BNC connector Power Input: Removable screw terminal block Alarm I/O: Removable screw terminal block Network: RJ45 connector
Environmental	
Temperature	Operating: 0°C to 40°C Storage: -20°C to 60°C
Relative Humidity	0% to 85%, non-condensing
Regulatory	
Emissions	FCC, CE (EN55022)
Immunity	CE (EN55024)
Safety	LVD 2006/95/EC

IP Specifications	
Resolutions	2560 x 1920, 2048 x 1536, 1600 x 1200, 1280 x 1024, 1280 x 720, 1024 x 768, 4CIF
Frame Rate <sup>1</sup>	Up to 8 fps @ 5.0 MP 12 fps @ 3.1 MP 20 fps @ 2.0 MP 30 fps @ 1.3 MP
Video Streaming	MJPEG controllable frame rate and bandwidth. Constant and variable bit rate
Security	Multiple user access levels with password protection
Users	3 simultaneous unicast
Video Access From Web Browser	Camera live view for up to 3 clients. Full control of all camera settings available to administrator.
Minimum Web Browsing Requirements	Pentium IV CPU 3.0 GHz or equivalent AMD, 512 MB RAM, AGP graphics card (32 MB RAM) Windows XP, 2000, Internet Explorer 6.x or later
Supported Protocols	IPv4, HTTP, TCP UDP, FTP, SMTP, ICMP DHCP, ARP, DNS
Environmental	
Mounts	
HBC5WT	Wall/ceiling mount bracket
System Compatibility	
The Megapixel range is supported by a comprehensive line of video management systems and accessories. Visit the Megapixel product pages on <a href="http://www.honeywell.com/security/uk">www.honeywell.com/security/uk</a> for up-to-date information on system compatibility.	

<sup>1</sup> with image cropping

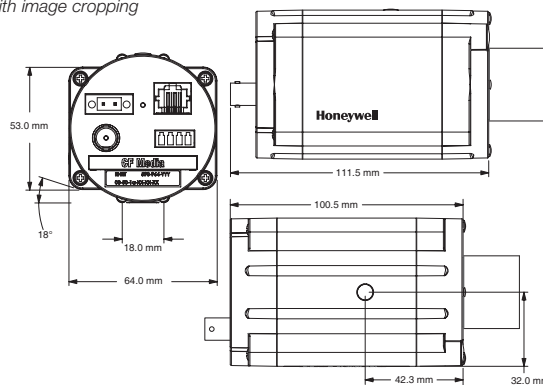

Ordering	
HCX5DW2	1/2" CMOS 5 Megapixel Colour Network Camera, 12 VDC/24 VAC or PoE 802.3 af, 4.5 mm to 13 mm Vari-Focal Fixed Iris F1.8, IR corrected lens included

**NOTE:** Honeywell reserves the right, without notification, to make changes in product design or specifications.

### For additional information,

please visit [www.honeywell.com/security/uk](http://www.honeywell.com/security/uk)

### Honeywell Security Group

Honeywell Systems Group  
Aston Fields Road  
Whitehouse Industrial Estate  
Runcorn  
Cheshire  
WA7 3DL  
Tel: 08448 000 235  
[www.honeywell.com](http://www.honeywell.com)

HVS-HCX5DW-02-EN(0210)DS-GCSC  
February 2010  
© 2010 Honeywell International Inc.

# Honeywell