

N-1000

Series Controllers



Versatility, reliability and expandability are the three main features that make the N-1000 one of the most popular access control panels ever.

Expandability is the most important feature of any access control system. The N-1000 can operate as a standalone two or four door controller, and up to 31 N-1000's may be connected on an RS485 drop-line as needs increase.

Using WIN-PAKTM access control software, a total system is achieved by having each drop-line connected to a communication port, modem or ethernet terminal server. The N-1000 is designed to operate off-line, making access control decisions independently from a PC or other controlling device. It can also be connected to a host computer for system configuration, alarm monitoring and

direct control. Connectivity to the host computer is accomplished via direct serial communication (RS232 or RS485), dial-up modem or TCP/IP network connection.

Another key feature of the N-1000 is its completely distributed database. All information regarding cards, time zones, relay control and alarm points is loaded into the N-1000's memory, enabling the unit to operate completely independently of any other equipment.

The N-1000-IV-X allows for a card database of 25,000 cards and a transaction buffer capable of storing 6,600 transactions.

FEATURES

- Four reader control panel (N-1000-IV)
- Supports all major reader technologies and 16-digit ABA card formats
- Distributed database for independent operation
- Operates in remote site configurations with dial-up (requires M-56K and N-485-HUB-2) or leased lines
- N-1000-IV-X: 25,000 card memory
N-1000-IV: 5,000 card memory
- N-1000-IV-X: 6,600 buffers
N-1000-IV: 10,200 buffers
- RS485 and 20 mA legacy communications are jumper selectable
- Compatible with the N-1000-III
- 16 supervised alarm inputs. Separate inputs for tamper switch and primary power fail monitoring
- DPDT Form C relays; four on N-1000-IV, eight on N-1000-IV-X
- 63 time zones to control card access, relays and alarm points
- Relays are "time-programmable" for automatic control
- 12 VDC battery backup
- 12 VDC, 500 mA output for reader/IR devices
- Eight programmable card formats supported
- Preassembled, hinged, locking enclosure with battery and toggle switch
- UL294 listing/CE certification

N-1000

Series Controllers

RECOMMENDED COMPONENTS

Controllers:

- N-1000-IV four reader controller module
- N-1000-IV-X four reader controller module with four additional relay outputs and additional card capacity)

Communication Devices:


- N-485-PCI-2 - RS485 direct connect to PC comm port
- N-485-HUB-2 - RS485 remote dial-up application (RS232 modem to 485 drop line)
- N485PCI2L - Convert RS485 to 232 for LANSRLU1
- LAN485KIT - Converter includes RS485 and LAN interface

Readers:

- OmniProx Proximity Readers
 - OMNI-10 (2-3" reader range)
 - OMNI-30 (4" reader range)
 - OMNI-40 (4" reader range)
- HID Proximity Readers
 - PR-MAX-PRO (24" reader range)
 - PR-P-PRO (8" reader range)
 - PR-PROXPRO-K-2 (8" reader range, card/keypad reader)
 - PR-MINI-PROX (5" reader range)
- Indala Proximity Readers
 - FP603 (4" reader range)
 - FP605 (4" reader range)
 - FP610 (10" reader range)
 - FP620 (24" reader range)
- Wiegand Reader
 - CR-1 (Wiegand swipe reader)
- Magnetic Stripe Readers:
 - NR-5 (track 2 reader)
 - NR-2-WR (track 1 reader) Keypads
 - KP10 switchplate 11 wire matrix
 - KP11 switchplate five wire Wiegand
 - KP12 mullion mount 11 wire matrix
 - KP13 mullion mount five wire Wiegand


Credentials:

- HID Proximity Cards
 - PX-4-H (34-bit)
 - PX-26-H (26-bit)
 - PVC-H-4 (34-bit for video badging)
 - PVC-H-4-26 (26-bit for video badging)
 - PVC-H-5 (34-bit with magnetic stripe for video badging)
- Motorola Proximity Cards
 - PX-121-I (26-bit)
 - PVC-I-6 (26-bit with magnetic stripe for video badging)
 - PVC-I-7 (26-bit for video badging)
- Magnetic Stripe Cards
 - NC-2 (32-bit standard)
 - PVC-M-2 (PVC card for video badging)
- Wiegand Cards
 - SC-2 (26-bit with hot stamp number)
 - PVC-W-2 (26-bit with hot stamp number for video badging)
- Miscellaneous:
 - X-4 power transformer for N-1000
 - S-4 suppressor kit for each active relay
 - BATT-replacement battery for N-1000-IV

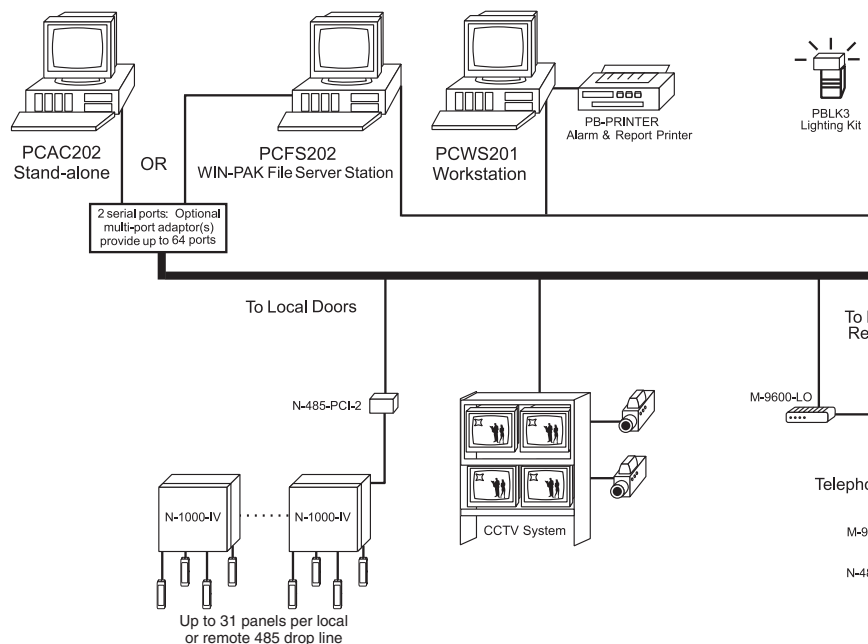

BENEFITS

- Modular hardware architecture provides flexibility and expansion capabilities
- Large, local controller database allows access control decisions to be made by controller in real time without the need to communicate to the server
- Scalable architecture ensures optimal performance with a seamless upgrade path to accommodate future growth beyond its initial installation
- Supervised communication
- SuperCap instead of Lithium battery provides maintenance free backup of panel programming and data storage
- Optional support for TCP/IP protocols to allow intelligent controllers to tap into a LAN or WAN connectivity
- Supports multiple reader and card formats for maximum flexibility and security options
- Scalability makes the N-1000 very cost effective for all applications, from small to very large systems

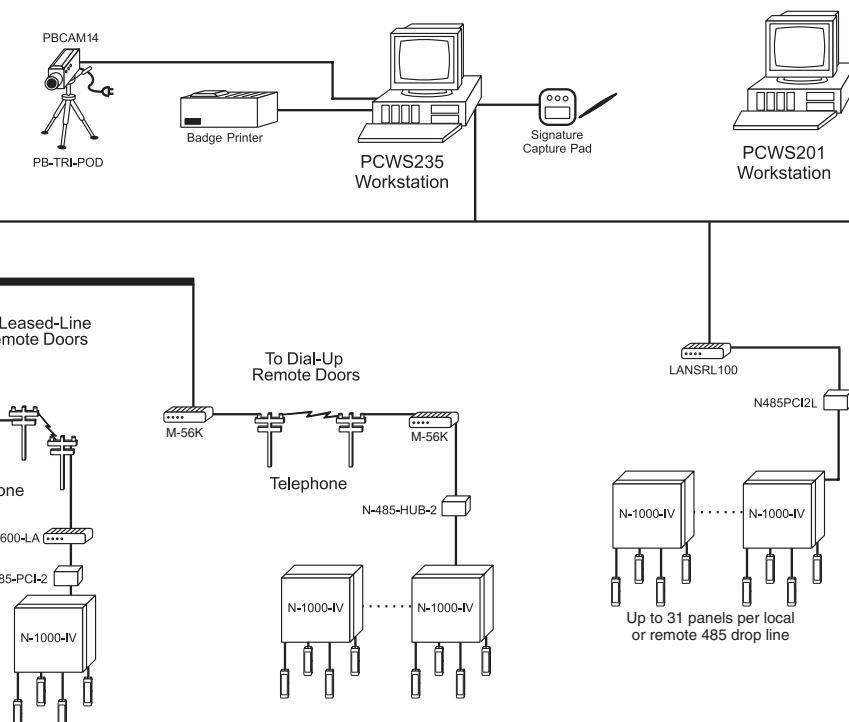

N-1000

Series Controllers

SPECIFICATIONS

Database:

- Cardholders: 5,000 standard, 25,000 with memory expansion
- Transaction storage: 10,200 standard, 6,600 with memory expansion
- Holidays: 32
- Time codes: 63 per controller
- Card reader formats: Eight
- Credential facility codes: Eight
- Elevator support: 32 groups
- Leap Year support

Communication:

- Communication support:
 - RS485
- Communication speed: 38.4 KBps (RS485 Backbone) (1200-4800 baud/20 mA)
- Automatic dial back:
 - Dial back on alarm condition

- Dial back when transaction buffer capacity is reached
- Download functionality:
 - System functional during system download: Yes
 - System functional during credential download: Yes

Operational Functionality:

- Duress detection
- Card/PIN:
 - Credential only
 - Credential and PIN
- Anti-passback support:
 - Learn
 - Hard
 - Forgiveness at midnight

Enclosure Dimensions:

- 14" H x 16" W x 4" D (35.56 cm H x 40.64 cm W x 10.16 cm D)

Weight:

- 9.5 kg

Environment:

- Temperature: 35-110°F (2-43°C) operational
- Humidity: 0 to 85% RHNC

Wire Requirements:

- Power - twisted pair, 18 AWG
- RS485 - 24 AWG, 4,000 ft/1,200 m max, 2 twisted pairs with shield (120 Ohm, 23pF, Belden 9842 or equiv.)
- Alarm input - twisted pair, 22 AWG 2000 ft
- Reader - 5 wire, 18 AWG up to 500 ft (152 m)
- Matrix keypad - 11 conductor up to 500 ft (152 m)

ORDERING

N-1000 Series Controllers

- N-1000-III** Two reader controller module, four DPDT relays, 16 supervised inputs
- N-1000-III-X** Two reader controller module, eight DPDT relay outputs and additional card capacity
- N-1000-IV** Four reader controller module, four DPDT relays, 16 supervised inputs
- N-1000-IV-X** Four reader controller module, eight DPDT relay outputs and additional card capacity

Hardwired communication devices for N-1000 series controllers

- N-485-PCI-2-220** RS232 to RS485 single port converter with Power Supply

Network communication devices for N-1000 series controllers

- N485PCI2L-220** RS485 interface for LANSERIALTUK with Power Supply
- LANSERIALTUK** TCP/IP to RS232 converter

Dial-up communication devices for N-1000 series controllers

- N-485-HUB-2-220** RS232/25 pin modem converter to RS485 with Power Supply
- M-56K** Dial-up modem

Miscellaneous

- PSX-220** Power transformer for N-1000
- S-4** Suppressor kit for each active relay
- BAT-3** 12V, 4A replacement battery

Honeywell Security & Data Collection

Honeywell Systems Group

Charles Avenue

Burgess Hill

West Sussex

RH15 9UF

Tel: 01444 251180

Fax: 01444 871074

www.honeywell.com/security/uk

Honeywell