

## IDP-PULL-SA / IDP-PULL-DA

### Addressable Single Action and Dual Action Pull Stations

The IDP-PULL-SA is a single action pull station requiring only one motion to activate the station. The IDP-PULL-DA is a dual action pull station requiring two motions to activate the station. Both pull stations are designed to work with Honeywell Farenhyt series fire alarm control panels (FACPs).

#### INSTALLATION

The IDP-PULL-SA and IDP-PULL-DA can be surface mounted to an SB-I/O surface back box or semi-flush mounted on a standard single-gang with a minimum depth of 2.13"(5.40 cm) or double gang or 4" (10.61 cm) square electrical box. You can also use the optional (System Sensor® PN BG-TR) trim ring if the station is being semi-flush mounted.

#### COMPATIBILITY

The IDP-PULL-SA and IDP-PULL-DA are compatible with the following Honeywell Farenhyt Series FACPs:

- IFP-2100 / IFP-2100ECS / RFP-2100
- IFP-2000 / IFP-2000ECS / RPS-2000
- IFP-1000 / IFP-1000ECS
- IFP-300 / IFP-300ECS
- IFP-100 / IFP-100ECS
- IFP-75
- IFP-50



**IDP-PULL-SA**




**IDP-PULL-DA**

## FEATURES & BENEFITS

- Installer can open station without causing an alarm condition
- Dual-color LED is visible through handle of station blinks green to indicate normal operation and remains steady red in an alarm condition
- Key operated test and reset lock using lock plate actuator
- Key matches compatible FACP locks
- Meets ADA requirement for 5 lbs maximum pull force to active
- Meets the Americans with Disabilities Act Accessibility Guidelines (ADAAG) controls and operating mechanisms guidelines (Section 4.1.3[13])
- Shell, door, and handle molded from durable LEXAN®
- Reliable analog communications for trouble-free operation
- Braille text on station handle
- Rotary address switches for fast installation
- Handle latches in down position and the word Activated appears, clearly indicating the station has been pulled
- UL Listed, including UL 38, Standard of Manually Actuated Signaling System
- CSFM Listed
- MEA Listed

# IDP-PULL-SA and IDP-PULL-DA Technical Specifications

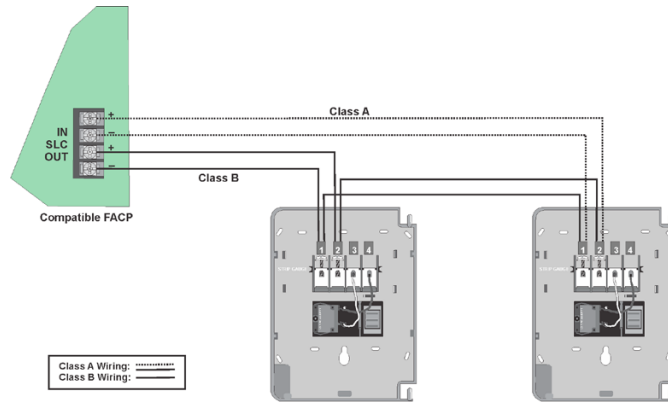

Wiring IDP-Pull-SA & IDP-Pull-DA Pull Stations

## SPECIFICATIONS\*

**Physical:** 5.5" H x 4" D ( 14cm x 10.2cm)

**Shipping Weight:** 5.4oz

**Housing Material:** LEXAN polycarbonate resin

### Bi-Colored LED:

**Blinking Green:** Normal

**Steady Red:** Alarm

**Switch:** Single pole, single throw (SPST) normally open (N/O) switch which closes upon activation of the pull station

## ELECTRICAL RATINGS

**Operating Voltage:** 15 – 32VDC

**SLC Standby and Alarm Current:** 350 $\mu$ A

**Wire Gauge:** Up to 12AWG (3.1 mm<sup>2</sup>)

## ENVIRONMENTAL

**Operating Temperature:** 32°-120°F (0°C – 49°C)

**Humidity:** 10 to 93% non-condensing)

## ORDERING INFORMATION

**IDP-Pull-SA:** Single Action Pull Station

**IDP-Pull-DA:** Dual Action Pull Station

## ACCESSORIES

**BG-TR:** Optional trim ring.

**SB-I/O:** Surface backbox, indoor/outdoor.

\* Unless otherwise noted, specifications apply to IDP-Pull-SA and IDP-Pull-DA

For a complete listing of all compliance approvals and certifications, please visit [www.farenhyt.com](http://www.farenhyt.com).

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

Honeywell® and System Sensor® are registered trademarks of and Farenhyt™ is a trademark of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, Please call 800-446-6444.

## For more information

Learn more about Honeywell's Farenhyt Series and other products available by visiting [www.farenhyt.com](http://www.farenhyt.com)

## Honeywell Security & Fire

12 Clintonville Road  
Northford, CT 06472  
800-328-0103

Doc 350286 | Rev H | 11/17  
© 2017 Honeywell International Inc.

**Honeywell**