



H3W2GR1V H3W4GR1V

Network TDN Low-Light WDR 2MP/4MP Indoor Dome

OPERATIONAL	
VIDEO STANDARD	NTSC/PAL
SCANNING SYSTEM	Progressive scan
IMAGE SENSOR	H3W2GR1V: 1/2.8" 2Megapixel progressive scan CMOS H3W4GR1V: 1/3" 4Megapixel progressive scan CMOS
NUMBER OF PIXELS (H × V)	2MP (1920x1080) - 4MP (2688x1520)
MINIMUM ILLUMINATION	H3W2GR1V: Color: 0.001Lux @f/1.6, B/W: 0Lux@f/1.6(IR on) H3W4GR1V: Color : 0.01Lux @f/1.6, B/W : 0Lux @f/1.6(IR on)
S/N RATIO	50db minimum
ELECTRONIC SHUTTER SPEED	Auto/Manual, 1/3~1/100000s
IR DISTANCE	20m
DAY/NIGHT	Mechanical ICR (ON / OFF / AUTO selectable)
BACKLIGHT COMPENSATION	BLC / HLC / WDR /SAC(Scene Adaptive Control)
WIDE DYNAMIC RANGE(WDR)	120dB (50/60fps off)
WHITE BALANCE	Auto/Natural/Street Lamp/Outdoor/Manual/Customize Region
GAIN CONTROL	Auto/Manual
NOISE REDUCTION	3D Noise Reduction (ON / OFF selectable)
PRIVACY MASKING	Up to 4 configurable areas
DEFOG	Auto/Manual/Off
LENS	2.7-13.5 mm MFZ, DC IRIS, optical zoom 5x lens F1.6
ANGLE OF VIEW	H3W2GR1V: FOV depending on different resolution H: 110° - 32°, V: 59° - 19° H3W4GR1V: FOV depending on different resolution H: 110° - 30°, V: 53° - 18°
AUDIO/TWO-WAY	Line In/Out, 1 built-in Mic
ALARM INPUT/OUTPUT	2 In / 1 Out
ANALOG OUTPUT SUPPORT	Supported
ETHERNET	RJ-45 (10/100Base-T)
IP SPECIFICATIONS	
VIDEO COMPRESSION	H.265+, H.265, H.264 and MJPEG bit rate control (CBR and VBR)
RESOLUTION	16:9 H3W2GR1V: 1080p (1920x1080)/ 720p (1280x720) H3W4GR1V: 3M (2304x1296)/1080p (1920x1080)/ 720p (1280x720)
	4:3 1.3M (1280x960)/VGA (640x480)
	OTHER H3W2GR1V: D1 (704x576/704x480)/ CIF (352x288/352x240) H3W4GR1V: 4M(2688x1520)/(2560x1440),/D1 (704x576/704x480)/ CIF(352x288/352x240)
FRAME RATE	MAIN STREAM H3W2GR1V: 1080P(1~50/60fps WDR off) H3W4GR1V: 4M(1~25/30fps)
	SUB STREAM H3W2GR1V: D1(1~50/60fps WDR off) H3W4GR1V: D1(1~25/30fps)
	THIRD STREAM H3W2GR1V: 1080P(1-25/30fps) H3W4GR1V: 4M(1~25/30fps)
	H3W2GR1V: Simultaneous Main stream and Third stream at 1080P (Main stream +Third stream <=68fps, WDR off, 2nd stream off) H3W4GR1V: Simultaneous Main stream and Third stream at 4MP (Main stream +Third stream <=34fps, 2nd stream off)
AUDIO COMPRESSION	G.711a/ G.711Mu/ AAC/G.726
AUDIO STREAM	Full duplex, simplex

IP SPECIFICATIONS	
SUPPORTED WEB BROWSERS	IE11/Chrome(with application)/Firefox(earlier than 52.0 version)
SUPPORTED OS	Windows® 7 32-bit/64-bit; Windows® 10 32-bit/64-bit
SUPPORTED PROTOCOLS*	HTTP, HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP;FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; QoS;UPnP;NTP; Bonjour; 802.1x; Multicast; ICMP;SNMP
COMPATIBILITY	ONVIF Profile S, G and Q
MAXIMUM USERS ACCESS	20 users
SECURITY	User account and password protection HTTPS, IP Filter, IEEE 802.1x, Digest authentication, User access log, TLS1.2, AES-256, SSH/Telnet closed, FTP disabled, PCI-DSS compliance, Hardware chipset for private key
	Motion Detection/Video Tampering/Face Detection/ SD Card Error/SD Card Capacity Warning/Audio Detection/ Object Abandoned/Object Missing/Tripwire/ Intrusion
	BUILT-IN ALARM & EVENT
EVENT TYPE	Recording on SD card, Relay output, Email, Snapshot
EVENT LINKAGE	ONVIF, ISOM
EVENT OUTPUT	Micro SDHC Capacity Max 32GB Micro SDXC Capacity Max 128GB
MICRO SD	Event trigger recording Continuous and scheduled recording Automatic recording when network fails
MICRO SD FUNCTION	English, Arabic, Czech, Dutch, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Turkish
LANGUAGES SUPPORTED	
ELECTRICAL	
POWER SUPPLY	PoE(802.3af) Class 0/12VDC/24VAC
LONG DISTANCE POE SUPPORT	3X POE (300m @100Mbps)
AC FREQUENCY	50/60 Hz
POWER CONSUMPTION	H3W2GR1V: 11W H3W4GR1V: 10.5W
AUXILIARY POWER SUPPLY	2.0W, DC12V (+/-5%)
MECHANICAL	
DIMENSIONS	4.96 × 4.80 in. (126.0 × 122.0 mm)
WEIGHT	H3W2GR1V: Product weight: 1.14lb (519g) Package Weight: 2.07lb (937g) H3W4GR1V: Product weight: 1.14lb (516g) Package Weight: 2.04lb (924g)
CONSTRUCTION	Plastic
CONSTRUCTION COLOR	RAL 9003 (White)
INSTALLATION	Surface mount, Flush mount (bracket supplied) or Wall mount using HD3-MK2
ENVIRONMENTAL	
OPERATING TEMPERATURE	-22°F to 140°F (-30°C to 60°C)
RELATIVE HUMIDITY	0% to 95%, non-condensing
REGULATORY	
EMISSIONS	FCC Part 15, CE (EN 55032); Complies: RCM (AS/NZS)
IMMUNITY	CE (EN 50130-4)
SAFETY	North America UL Listed to UL/CSA 60950-1, CE (EN 60950-1)
ROHS	EN50581


* Some development may be required in specific user cases to support some of these protocols in the field as they mature over time.

Network TDN Low-Light WDR 2MP/4MP Indoor Dome

RECOMMENDED ACCESSORIES

SYSTEM INTEGRATION

ONVIF support and open API software integration. Refer to www.onvif.org for the ONVIF specification and the Honeywell Open Technology Alliance website (<http://www.security.honeywell.com/hota/>) to learn more about our open and integrated solutions.




HOUSINGS AND MOUNTS

H3G-CB		Replacement Dome (Clear)
H3G-SB		Replacement Dome (Smoke)
HD3-MK2		Wall Mount Bracket
HPOE3X		3X Long Distance POE Switch
HLR1001		IP over Coax Converter
4S BOX		4S Box (Depth no less than 2-1/8", need to purchase from market)
HD3IP-5K1+HD5-MK2 + HD5CBL/HD5CWH/HD5TBL/HD5TWH		Plenum Box

ORDERING

H3W2GR1V	Network TDN Low Light WDR IR Indoor Dome Camera, 1/2.8" 2 Megapixel progressive scan CMOS, 2.7-13.5 mm MFZ, 3 IR LEDs, PoE, H.265.
H3W4GR1V	Network TDN WDR IR Indoor Dome Camera, 1/3" 4 Megapixel progressive scan CMOS, 2.7-13.5 mm MFZ, 3 IR LEDs, PoE, H.265.

DIMENSIONS

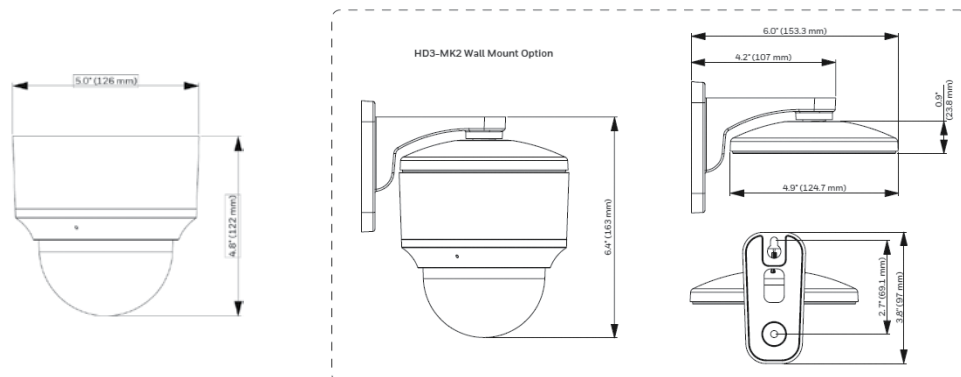

For more information

www.honeywellvideo.com

Honeywell Security and Fire

2700 Blankenbaker Pkwy, Suite
150 Louisville, KY 40299
1.800.323.4576
www.honeywell.com

ONVIF and the ONVIF logo are trademarks of ONVIF Inc. Honeywell reserves the right, without notification, to make changes in product design or specifications.

L/H3WXGR1VD/D | 10/18
© 2018 Honeywell International Inc.

