

Remote Paging Unit

ECS-RPU

The ECS-RPU is a remote paging unit that provides a supervised microphone, 8 emergency message buttons, and 16 mappable audio switches. With dimensions of 17 ¾" x 11 7/16" x 3 ½", this lower profile remote paging unit is ideal for locations where the standard LOC won't fit.

The RA-2000 and RA-100 have the same height and flush mount depth as the ECS-RPU so if your installation requires a fully functioning LOC with annunciation the RA-2000 or RA-100 can be installed right next to the ECS-RPU for a sleek installation.

The IFP-100ECS and IFP-1000ECS can support a maximum of 7 ECS-RPUs or ECS-RCUs in any combination.

The IFP-2000ECS can support a maximum of 15 ECS-RPUs or ECS-RCU2000s in any combination.

Features

- Smaller footprint than the ECS-RCU
- Supervised Microphone
- Connects to control panel via 4-wire SBUS and 2-wire VBUS
- Eight emergency communication message buttons
- 16 mappable audio switches

Installation

The ECS-RPU can be surface or flush mounted.

Approvals

NFPA 70, & NFPA 72: Central Station; Remote Signalling; Local Protective Signalling Systems; Auxiliary Protected Premises Unit; & Water Deluge Releasing Service.

Other Approvals:

UL Listing; CSFM (pending); City of NY (pending)

Agency Listings



Pending



City of NY
(Pending)



ECS-RPU


Compatibility

The ECS-RPU is compatible with the following voice evacuation components:

- IFP-1000ECS Voice Integration Panel with Fire Alarm Control (max 7 per system)
- IFP-100ECS Voice Integration Panel with Fire Alarm Control (max 7 per system)
- IFP-2000ECS Voice Integration Panel with Fire Alarm Control (max 15 per system)

Remote Annunciators

- RA-100 (used with IFP-100ECS and IFP-1000ECS)
- RA-2000 (used with IFP-2000ECS)

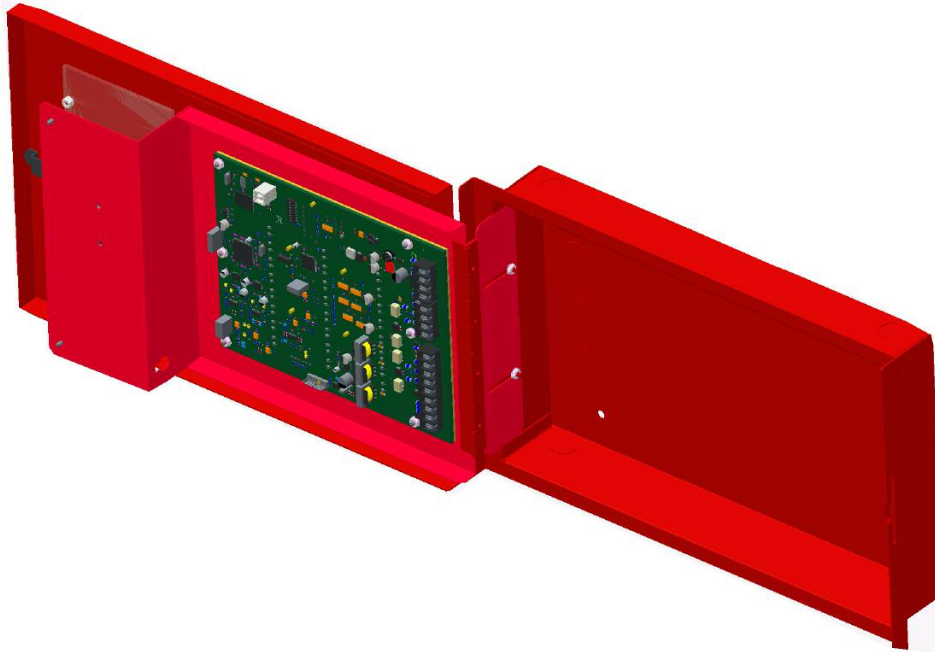

ECS-RPU Open 180° for Easy Access to Board



ECS-RPU shown with an RA-2000

Specifications

Physical

Flush Mount Dimensions:

16 3/8" W x 10"
(41.6 W x 25.4 cm)

Overall Dimensions:

17.739" W x 11.372" H x 3.329" D
(45.057 W x 28.885 H x 8.4557 D cm)

Color: Red

Electrical

Standby Current: 70 mA

Alarm Current: 100 mA

Ordering Information


ECS-RPU Remote Paging Unit

Accessories

THUMBLTCH - Turn latch lock



This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For more information, contact Silent Knight 12 Clintonville Road, Northford, CT 06472-1610 Phone: (800) 328-0103, Fax: (203) 484-7118. www.farenhyt.com



Assembled in the
U.S.A.