
OMNI INDOOR ANTENNA
130 - 1000 MHz

BDA-OIA-1301000-2

Product Features


• Mounting on ned for mounting on a ceiling or gyprock wall without the need of a ground plane.

• Thisantenna is entirely flat and gets integrated into the ceiling almost invisibly.

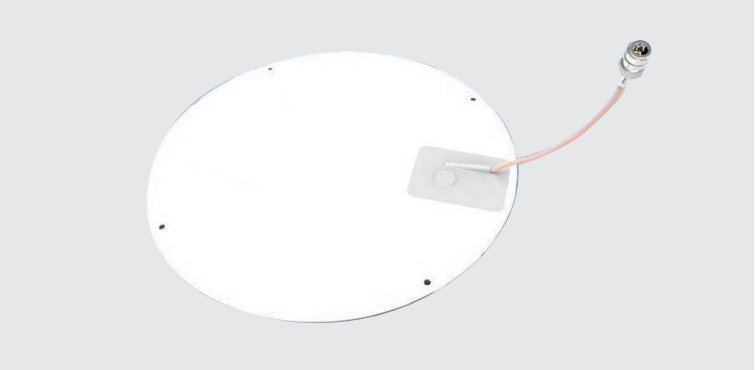


Electric Specifications	Value
Frequency Range	130 - 1000 MHz
Nominal Gain	Unity
VSWR	1.8:1 Typical (2.0:1 Maximum)
Bandwidth: 1.8:1 VSWR,	870
Pattern	Omnidirectional
Power Handling	5 W
Nominal Impedance	50 Ohms
Color	White
Standard Termination	N Female

Mechanical Specifications	Value
Diameter	15.25 in (387.35)
Thickness	0.07 in (1.8 mm)
Weight	Less than 1 lbs (0.45 kg)
Mounting Hardware	Mounting bolts provided

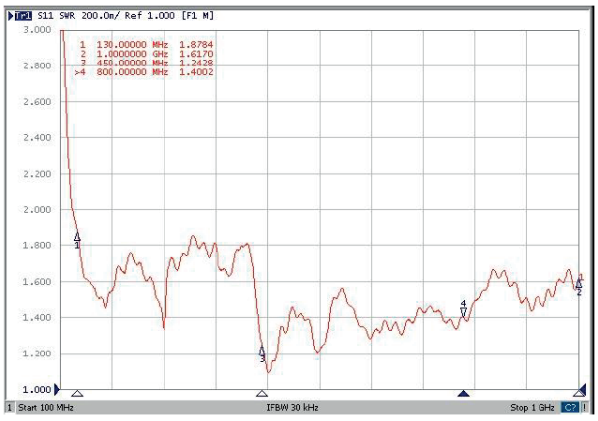

VSWR Curve (regardless of positioning of cable)

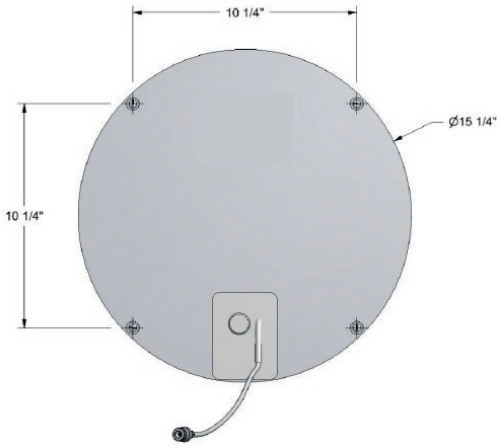

DOC HON-62133.00 • 21122020 • DMC

Honeywell Building Technologies
715 Peachtree Street NE
Atlanta, GA 30308
www.honeywell.com

HON-62133.00 • 21122020
©2020 by Honeywell International Inc. All rights reserved.
Unauthorized use of this document is strictly prohibited.
This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.
Country of origin: U.S.A.

THE FUTURE IS WHAT WE MAKE IT

Honeywell