
RF LOADS / TERMINATIONS
DC - 3000 MHz

BDA-LD-xx


Product Features

- Passive devices designed in a coaxial configuration
- Nominal impedance is 50 ohms
- Power levels 5W and 50W
- N male type connectors as standard, other types available upon request

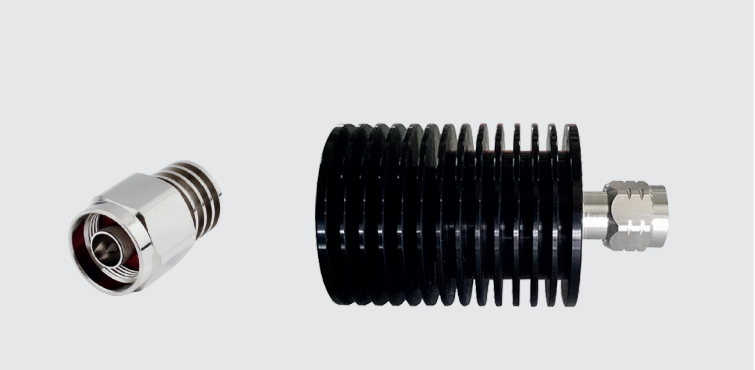


Specification	BDA-LD-05	BDA-LD-50
Frequency band	DC-3GHz	DC-3GHz
Input power	5W, CW	50W, CW
Coolant	Natural convection	Natural convection
Type	In-line, coaxial	In-line, coaxial
Impedance	50 Ω	50 Ω
VSWR	1.2:1 min	1.2:1 min
Connector	N(m)	N(m)
Tempearture range	-22º to 149º F -30º to +65º C	-22º to 149º F -30º to +65º C
MTBF	>1,000,000 hours	>500,000 hours
Weight	0.17 lbs • 0.08 kg	1.1 lbs • 0.5 kg
Operating position	Any	Any

BDA-LD-05

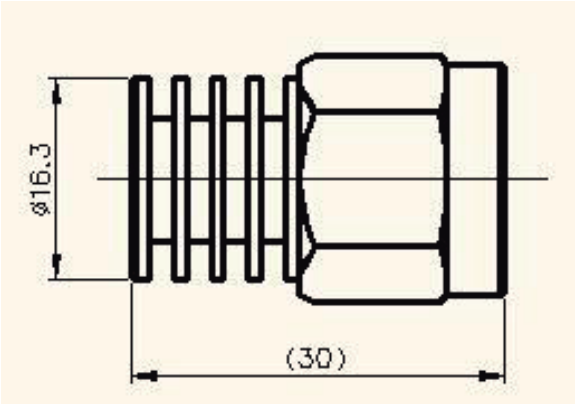

BDA-LD-50

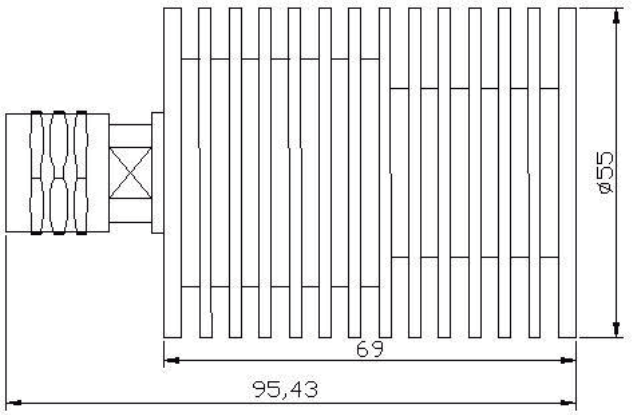

DOC HON-62077 • 10202020 • DM

Honeywell Business Solutions
715 Peachtree Street NE
Atlanta, GA 30308
www.honeywell.com

HON-62077 • 10202020
©2020 by Honeywell International Inc. All rights reserved.
Unauthorized use of this document is strictly prohibited.
This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.
Country of origin: U.S.A.

THE FUTURE IS WHAT WE MAKE IT

Honeywell