PANEL ANTENNA
380-698 / 698-960 / 1710-2700 MHz

BDA-PIA-380869-4-1

Product Features

- Broadband, Low VSWR
- Compact Size, Low Profile
- ABS Radome



Specifications	Value		
Freq. Range	380-698 MHz	698-960 MHz	1710-2700 MHz
Gain-dBi (max)	3±1.5	4±1.5	7±1.5
VSWR	≤2.5	≤2.5	≤2.0
Horizontal Beamwidth (Typical value)	110	140	40
Vertical Beamwidth (Typical value)	90	110	50
Impedance	Ω 50	Ω 50	Ω 50
Polarization	Vertical	Vertical	Vertical
Max. Power	50W	50W	50W
Connector Type	N-female or Custom	N-female or Custom	N-female or Custom
Dimension-mm	261×249×71.5/±1.5	261×249×71.5/±1.5	261×249×71.5/±1.5
Weight	0.8±0.1 Kg	0.8±0.1 Kg	0.8±0.1 Kg
Color	White	White	White


DOC HON-62091.00 • 11122020 • DMC

Honeywell

PANEL ANTENNA
380-698 / 698-960 / 1710-2700 MHz

BDA-PIA-380869-4-1

Installation Sketch

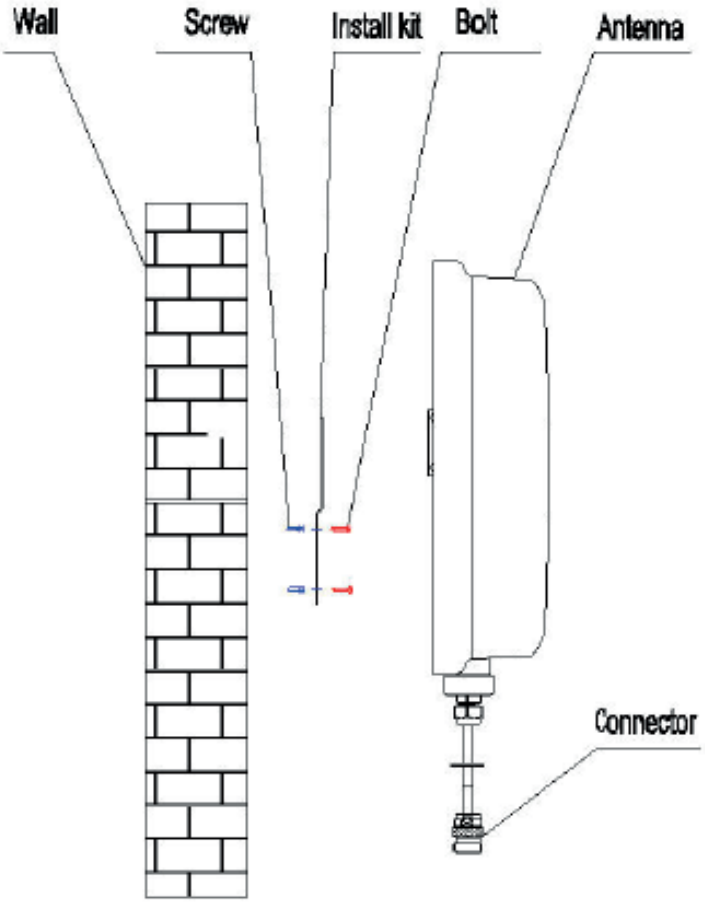

DOC HON-62091.00 • 11122020 • DMC

Honeywell Business Solutions
715 Peachtree Street NE
Atlanta, GA 30308
www.honeywell.com

HON-62091.00 • 11122020
©2020 by Honeywell International Inc. All rights reserved.
Unauthorized use of this document is strictly prohibited.
This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.
Country of origin: U.S.A.

THE FUTURE IS WHAT WE MAKE IT

Honeywell