OMNI INDOOR ANTENNA
380 - 698 / 698 - 960 / 1710 - 2700 MHz

BDA-OIA-3851-6996


Product Features

- Broad Band, Low VSWR
- Support current main popular communication system
- ABS Radome
- Ceiling mount, easy to install



Electric Specifications	Value		
Freq. Range	380-698	698-960	1710-2700
Gain-dBi(max)	2±1.5	3±1.5	6.5±1.5
VSWR	≤2.5	≤2.5	≤1.7
Vertical Beamwidth-° (Typical value)	85	60	25
Impedance		50Ω	
Polarization		Vertical	
Max.Power		50W	
Connector		N Female or customized	
Dimension		12.60 x 6.88 inches • (Φ320×175)±2mm	
Weight		1.54 lbs (0.7±0.2 kg)	
Operating temperature		` -40 to 140 F	
Radome color		White	
Mounting way		Fixed with Nut	

Installation Sketch

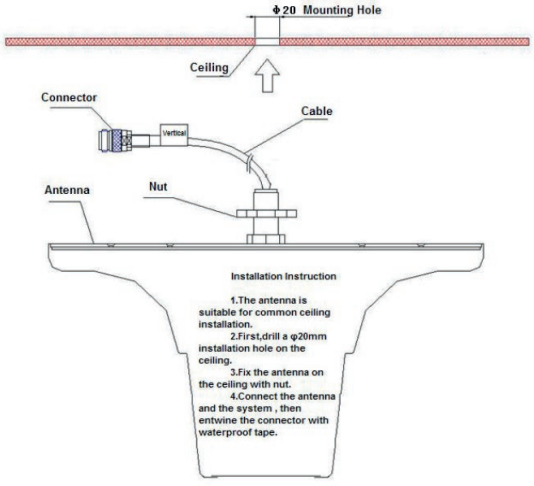

DOC HON-62134.00 • 12282020 • DMC

Honeywell Building Technologies
715 Peachtree Street NE
Atlanta, GA 30308
www.honeywell.com

HON-62134.00 • 12282020 • DMC
©2020 by Honeywell International Inc. All rights reserved.
Unauthorized use of this document is strictly prohibited.
This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.
Country of origin: U.S.A.

THE FUTURE IS WHAT WE MAKE IT

Honeywell