HM-MCP-G-UL-I

ADDRESSABLE MANUAL CALL POINT

The HM-MCP-G-UL-I is an addressable break glass manual call point which, as a simple rotary decade, switch at the rear of the unit for addressing. A specialist test key may be inserted into the bottom of the unit to lower the glass and release the micro-switch–enabling a complete functionality test.



HM-MCP-G-UL-I

The HM-MCP-G-UL-I call point is designed to provide a manual alarm interface to Morley IAS's fire alarm control panel. Installation efficiency and compliance with the latest standards are at the heart of the call point range.

LED STATUS


The LED status is controlled by the fire panel and shows blinking RED each time the device is polled, or continuous RED to indicate fire detection.

FEATURES AND BENEFITS


- Unique 'Plug & Play' installation concept
- Analogue addressable communications
- Integral LED

MECHANICAL SPECIFICATIONS


CONNECTION DETAILS

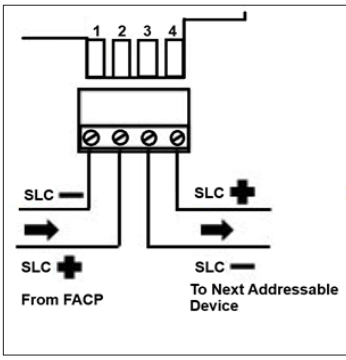

DIMENSIONS

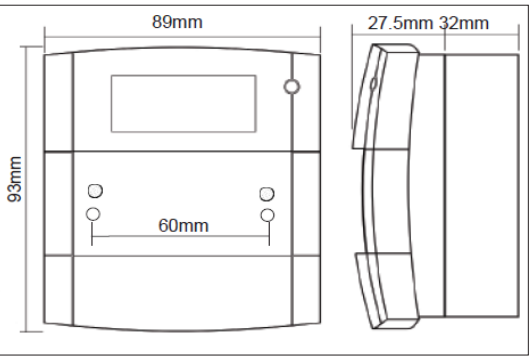

PUSH FIT CONNECTOR

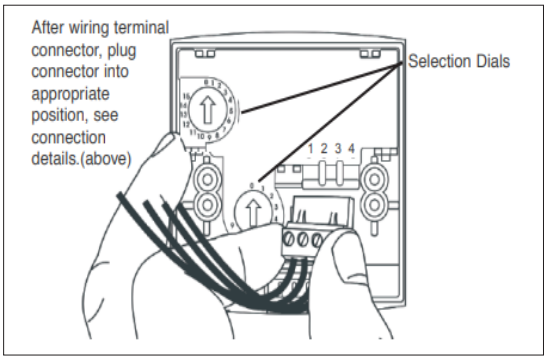

HM-MCP-G-UL-I SPECIFICATIONS

Dimensions:	Semi-flush mounting: 89x93x27.5 (WxHxD) Surface mounting: 89x93x59.5 (WxHxD)
Weight:	130g
Operating Temprature:	0°-49°C
Ingress Protection (IP) Rating:	IP 24
Relative Humidity Range:	10% to 93% non-condensing
Construction Material:	Durable Polycarbonate/ABS/PVC

ELECTRICAL

Operating Voltage:	24 VDC
Quiescent (Avg) Current Consumption:	385 µA
Alarm (Max) Current Consumption:	7.8 mA

PART NUMBER	PRODUCT DESCRIPTION
HM-MCP-G-UL-I	**Addressable Break Glass Manual Call point**

OPTIONAL ACCESSORIES	
PS230	**Pack of ten resettable elements**
MUS041W	**Manual call point back box**
MUS156	**Pack of ten glass elements**
SC070	**Pack of 10 test keys**

Honeywell International (I) Pvt Ltd
Sector-36, Pace City-II
Gurgaon - 122 004
Haryana, India

For more information
Tel: 0008000502167
www.honeywellbuildings.in

Doc I Rev I MM/YR
© 2024 Honeywell International Inc.