
Honeywell

Loudspeaker

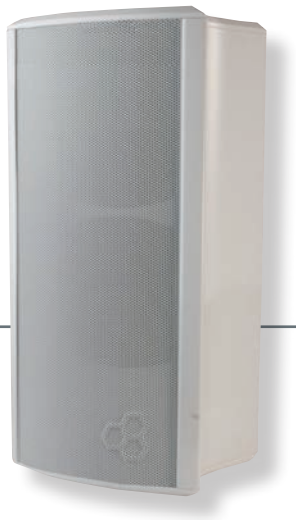

20W Column Loudspeaker

Honeywell's Voice alarm column loudspeaker complies with BS 5859 part 8 and EN54 part 24.


Technical Specifications

SPECIFICATION	
Max power	30 W
Rated power	20 W
Power tapping	20 W / 10 W / 5 W / 2.5 W
SPL at 1W/1M (100Hz - 10KHz)	92 dB
SPL at 20W/1M (100Hz - 10KHz)	103 dB
Frequency response (-10 dB)	300 Hz ~ 15 KHz
Rated input voltage	100 V / 70 V
Rated impedance	500 Ω / 1K Ω / 2K Ω / 4K Ω
Connection	Fire-resistant Cable
MECHANICAL	
Dimensions (W×H×D)	165 mm x 150 mm x 344 mm
Weight	3.75 Kg
Colour	White (RAL9003)
Speaker size	4" x 2
Material	Aluminum
IP Rating	66


Loudspeaker

20W Column Loudspeaker


Frequency Response

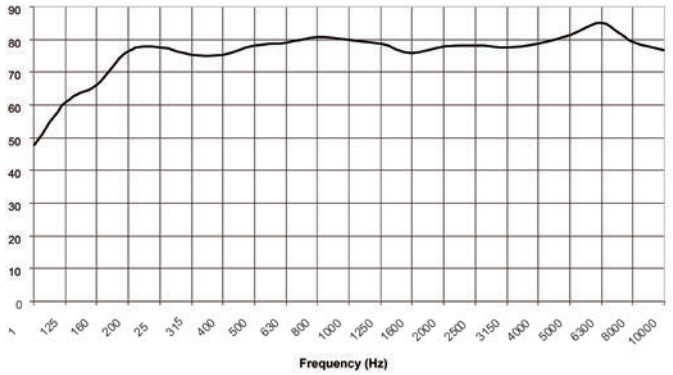


Circuit Diagram

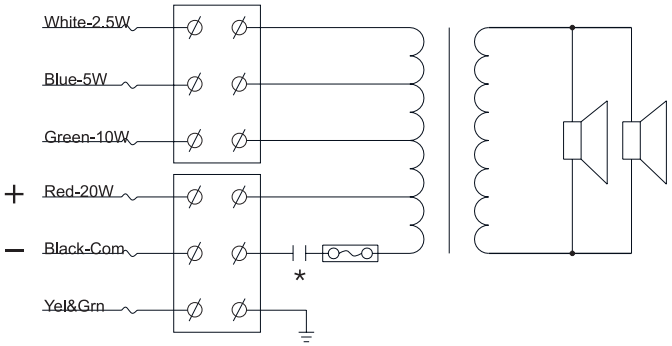

Polar Diagram

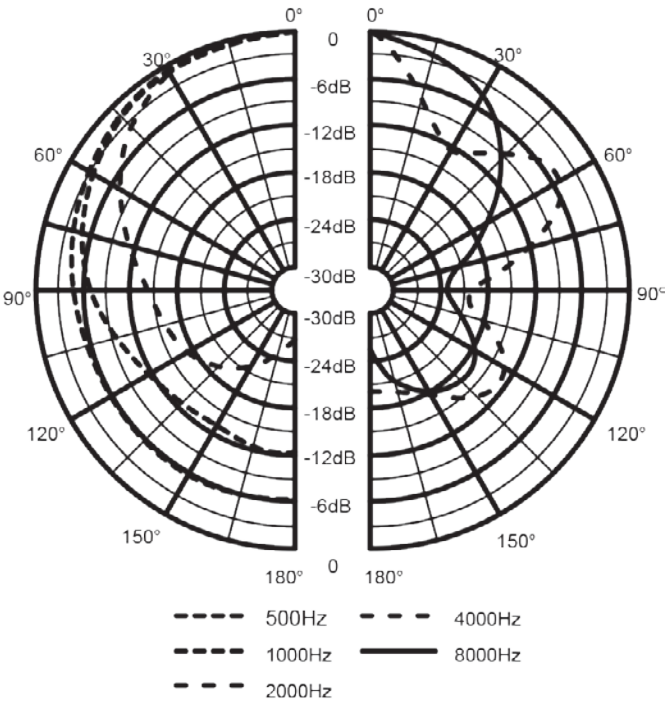

Three-View Diagram

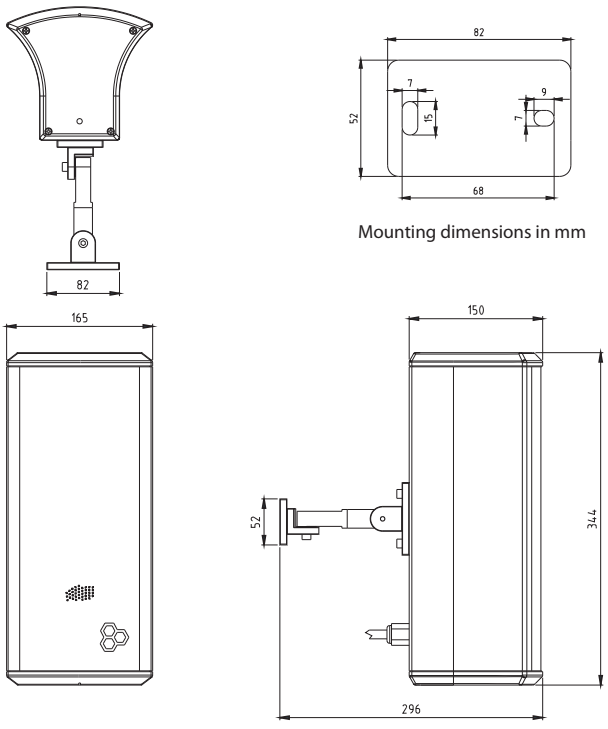

Dimensions in mm

Mounting dimensions in mm

DESCRIPTION	ORDER CODES
20W Column Loudspeaker	582476

Honeywell
Tel: +44 (0) 116 246 2000
Fax: +44 (0) 116 246 2300
Email: ukorders@honeywell.com
140 Waterside Road
Hamilton Industrial Park
Leicester
LE5 1TN

October 2013
© 2013 Honeywell International Inc.