582474 (L-VJM20A/EN)
20 W Unidirectional Sound Projector

- **Intelligible voice and superior sound reproduction**
- **Ceiling or wall mount**
- **Meets virtually any outdoor requirements**
- **Water and dust protected to IP 65**
- **Complies with EN 54-24 standard**



This loudspeaker is a high-performance 20 W voice alarm unidirectional sound projector. It provides a broad frequency response range, low distortion and high sound pressure level for accurate and intelligible broadcast of evacuation messages and high quality sound reproduction. It can be used in indoor, outdoor, dry, or wet applications, providing reliable operations over wide temperature and humidity ranges. Its low-profile, white color design blends easily with most interiors in locations such as hotels, conference rooms, cinemas, theme parks, factories and exhibitions.
This voice alarm unidirectional sound projector complies with BS 5839 part 8 and EN 54 part 24.

Mounting
A durable bracket is provided for quick installation and flexible angle adjustment. Besides, this unidirectional loudspeaker can be ceiling mount with a bracket.

Power setting
The product comes with a one meter, fire resistant six core cable already attached to the ceramic connector. The cable is a bundle of wires color coordinated corresponding to the different power taps of the transformer. The cable connector is mounted on the back cover for easy installation.

Honeywell

Technical Specifications

Electrical

Max. power	30 W
Rated power	20 W
Power tapping	20 W / 10 W / 5 W / 12.5 W
SPL @ 1 W / 1 m (100 Hz ~ 10 kHz)	89 dB
SPL @ 20 W / 4 m (100 Hz ~ 10 kHz)	89 dB
Frequency range	150 Hz ~ 20 kHz
Rated input voltage	100 V / 70V
Rated impedance	500 Ω / 11 k Ω / 2 k Ω / 4 k Ω
Connection	Fire resistant cable

Mechanical

Dimensions	Ø 140 mm x 140 mm x 195 mm
Diameter of speakers	5.25 “
Weight	2.65 kg
Color	White (RAL 9003)
Material	Aluminium
IP rating	IP 65

Environmental

Operating temperature	- 25 °C … + 55 °C
Storage temperature	- 40 °C … + 70 °C
Relative humidity	< 95 %


Order Information

Catalog description	20 W unidirectional sound projector
Part number	582474
Type	L-VJM20A/EN
DoP number	CPR-DoP-2013003

Additional order information can be found in the product catalog “VAPA System VARIODYN D1”.


* The reference axis is perpendicular to the centre point of the front grille
* The reference plane is perpendicular to the centre of the reference axis
* The horizontal plane is perpendicular to the centre of the reference plane
* The spec/data was measured using a standard baffle mounting in an anechoic chamber as described in EN 54-24

Diagrams

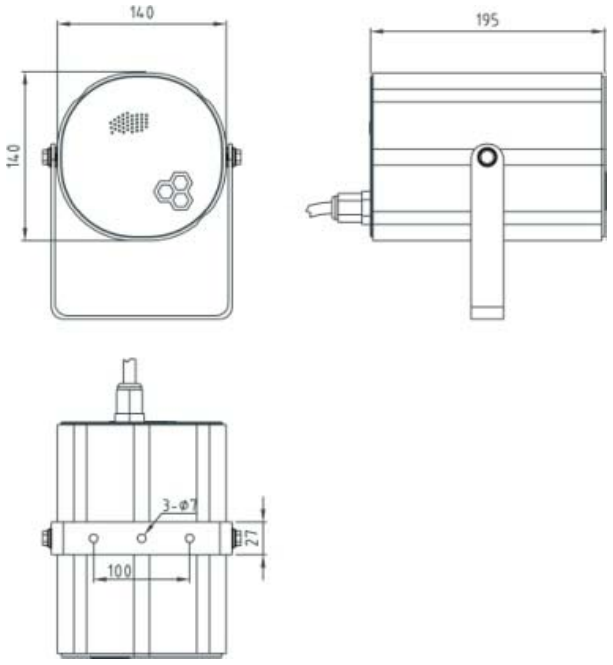

Dimensions in mm

Circuit Diagram

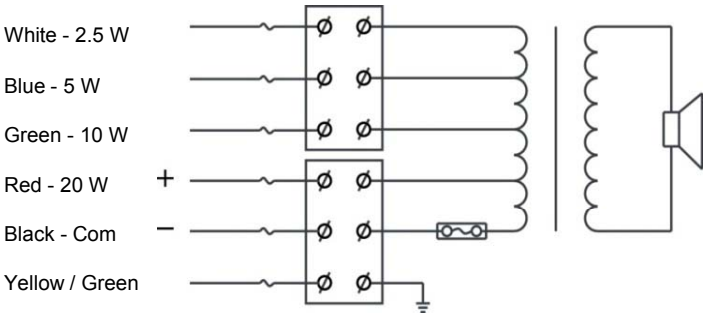


With Transformer:
100 V / 70 V line

	Red	Green	Blue	White	Black
100 V	20 W	10 W	5 W	2.5 W	Com
70 V	10 W	5 W	2.5 W	1.25 W	Com
IMP (Ω)	500	1 K	2 K	4 K	

Frequency Response

Frequency response at 100 V / 4 m / 1/3 oct. smoothing

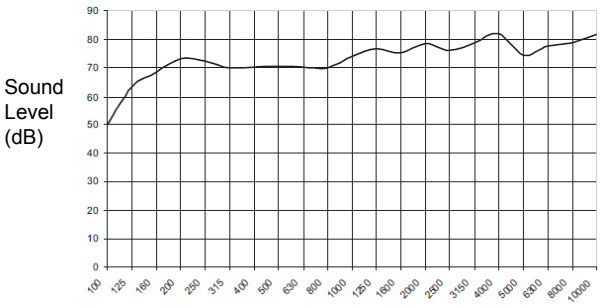

Dispersion Angles

		Horizontal	Vertical
1 oct. pink noise	500 Hz	360 °	360 °
1 oct. pink noise	1 kHz	214 °	219 °
1 oct. pink noise	2 kHz	116 °	116 °
1 oct. pink noise	4 kHz	57 °	58 °

Novar GmbH a Honeywell Company
Dieselstrasse 2
41469 Neuss, Germany
Phone: +49 2131 40615-0 (Administration)
Phone: +49 2131 40615-600 (Customer Service Center)
Fax: +49 2131 40615-286

Honeywell Life Safety Austria GmbH
Lemböckgasse 49
1230 Vienna, Austria
Phone: +43 1 600 6030
Fax: +43 1 600 6030-900
Internet: www.hls-austria.at
Email: hls-austria@honeywell.com