
HIGH POWER DIRECTIONAL COUPLER
136 - 870 MHz


BDA-DCxx-L2

Product Applications

- Guaranteed PIM Compliance
- Wide Frequency Band Covering 136-870MHz
- Low Insertion Loss
- Low VSWR
- Indoor Using
- Available with Type N, 7/16DIN or 4.3/10 male Connectors

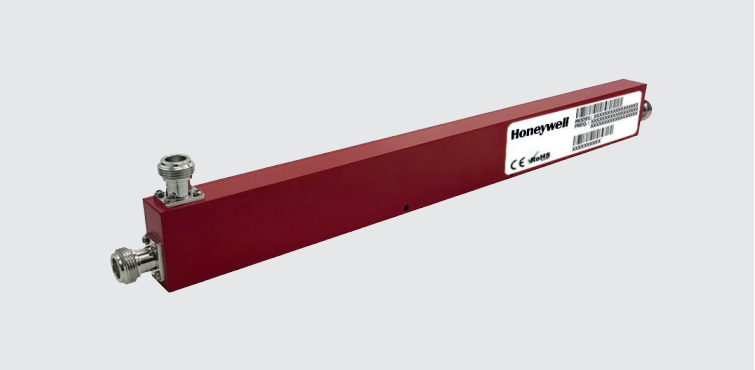

Specification	Value					
Product Number	DC6-L2	DC8-L2	DC10-L2	DC15-L2	DC20-L2	DC30-L2
Coupling(dB)	6	8	10	15	20	30
Accuracy(dB)	±1.5	±1.8	±2.0	±2.0	±2.0	±2.5
Insertion Loss(dB)	≤1.75	≤1.35	≤0.90	≤0.70	≤0.50	≤0.30
Isolation	≥21	≥23	≥25	≥28	≥30	≥43
Freq				136-870 MHz		
VSWR				≤1.30		
Power Rating				200W (average Per Port) - 1000W (peak)		
Impedance				50 ohm		
Connector				N-female		
Color				Red-plated		
Operating Temperature				-25°C to +75°C		
Weight				1.05 kg		
MTBF				>1,000,000 hours		

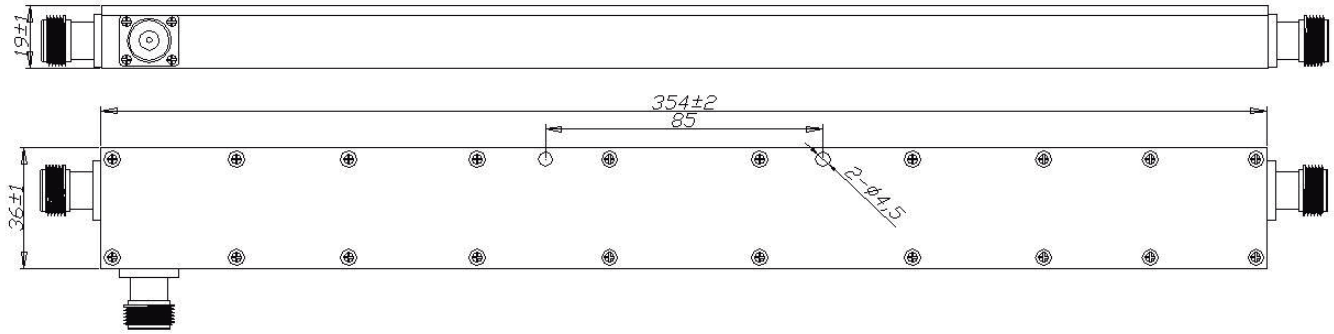

DOC HON-62074.02 • 10202020 • DMC

Honeywell Business Solutions
715 Peachtree Street NE
Atlanta, GA 30308
www.honeywell.com

HON-62074.02 • 10202020
©2020 by Honeywell International Inc. All rights reserved.
Unauthorized use of this document is strictly prohibited.
This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.
Country of origin: U.S.A.

THE FUTURE IS WHAT WE MAKE IT

Honeywell