

# 4 WAY SPLITTER UNIT


## Emergency Voice Communication System

The 4 way splitter unit allows up to 4 stand alone disabled toilets to be monitored in one specific area.

Staff can then at the designated area such as a reception or security desk react to an alarm swiftly and efficiently.



## TYPICAL EMERGENCY ALARM ASSIST SYSTEM USING A 4 WAY SPLITTER

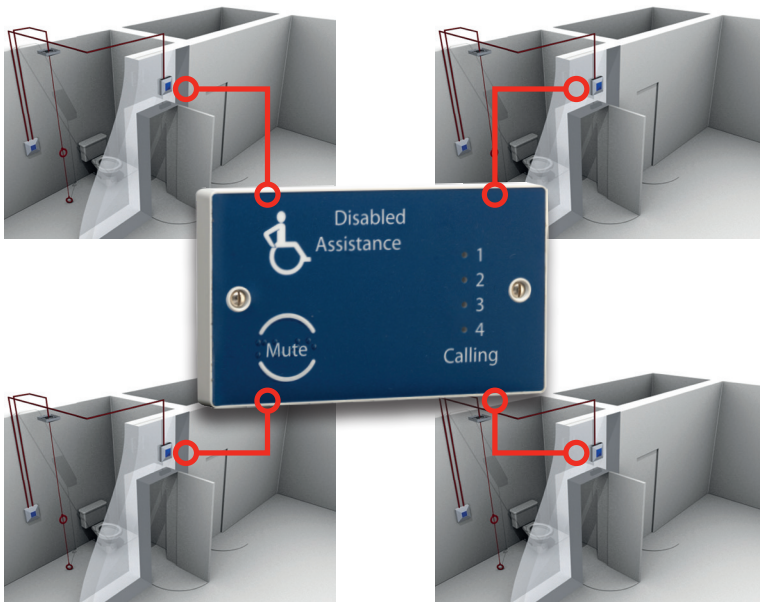

## FEATURES AND BENEFITS

- Designed to comply with all regulations and recommendations
- High visibility
- More than one 4 way splitter can be used
- Small compact design
- Up to 4 disabled toilets monitored in one area
- Uses blue LEDs to avoid confusion
- Visibility to remote staffed areas
- No mains or Power
- Supply Unit (PSU) required at each disabled toilet

## 4 Way Splitter Unit Technical Specification

### POWER SUPPLY UNIT SPECIFICATION

Dimensions (W x H x D) 146 mm x 86 mm x 39 mm

### ELECTRICAL SPECIFICATION

Mains 230V ac +10% -15%

Output 12V dc (nominal)

### PHYSICAL


Construction Flame retardant Polycarbonate

### 4 WAY SPLITTER UNIT

Dimensions (W x H x D) 146 mm x 86 mm x 39 mm

### PHYSICAL

Construction Flame retardant Polycarbonate

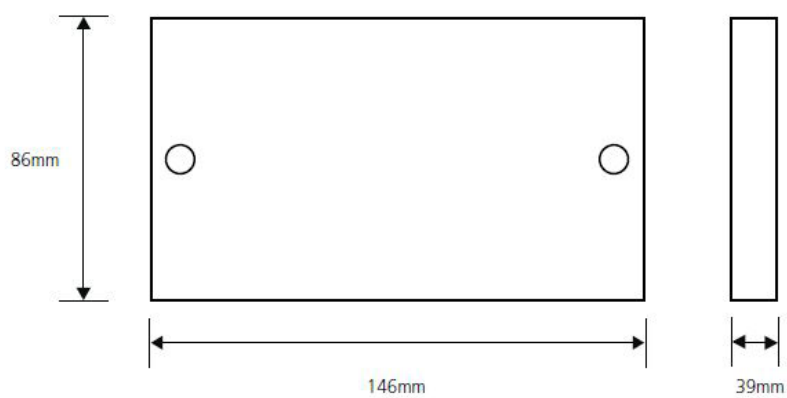

### ORDER CODES

DESCRIPTION	ORDER CODE
4 Way Splitter Emergency Assist	EVCS-TASP4
PSU for use with 4 Way Splitter Emergency Assist	EVCS-TASP4-P

#### For more information

Contact your Business Manager

#### Honeywell

140 Waterside Road  
Hamilton Industrial Park  
Leicester, LE5 1TN  
Tel: +44 (0) 203 409 1779

4WAYUNIT01 | 03/2020  
© 2020 Honeywell International Inc.

**Honeywell**