

FFT-FPJ

Fire Fighters Telephone Phone Jack

The FFT-FPJ remote Firefighter Phone Jack provides a quick connect to the SK-FFT fire fighter telephone system using a FFT-RHS remote handset.


The FFT-FPJ are wired to the SK-FFT Fire Fighter Telephone System audio circuit. A monitor module detects the connection and its address will turn on the corresponding IFP-FFT zone LED and PZT will sound. Pressing the answer switch will connect the local handset to the phone circuit allowing communication with the remote handset

COMPATIBILITY

The FFT-FPJ is compatible with the SK-FFT. Firefighters Telephone System.

INSTALLATION

The FFT-FPJ Fire Fighter Phone Jack mounts to a single-gang electrical box (4" x 2-1/8" x 2 1/2") or when the addressable mini-monitor module is installed with it, a deep single-gang electrical box (4" x 2-1/8" x 3 3/4"). For detailed installation instructions see IFP-FFT installation manual P/N 54708.

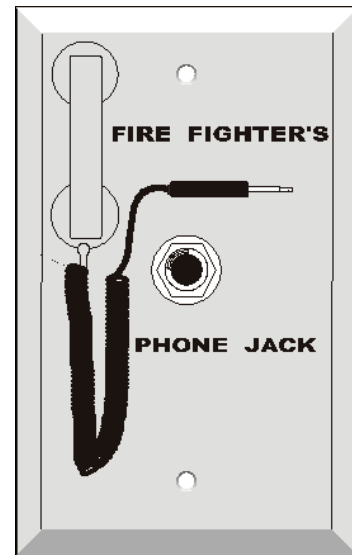

FFT-FPJ

FEATURES & BENEFITS

- SK-FFT Fire Fighter Telephone System can control and annunciate up to 48 remote telephone jack zones
- A maximum of 10 Fire Fighter Remote Handsets (FFT-RHS) can be used at one time to communicate over the telephone circuit connected to the SK-FFT
- Fire Fighter Phone Jack (FFT-FPJ) provides a plug-in location for the FFT-RHS.
- Multiple FFT-FPJs can be connected to a single monitor module for annunciation by floor instead of by jack.

FFT-FPJ Technical Specifications

PHYSICAL

Dimensions: 4¾" W x 2¾" H x 1½" D (12.065 x 6.985 x 3.81 cm)

ENVIRONMENTAL

Operating Temperature: 32°F-120°F (0°C – 49°C)

Humidity: 10% – 93% noncondensing

ELECTRICAL

The FFT-FPJ is a passive device that does not draw current

AGENCY LISTINGS AND APPROVALS

UL: Listed

CSFM: 7300-0559:0167

ORDERING INFORMATION

SK-FFT: Fire Fighters Telephone

SK-MINIMON: Mini-Monitor module

SK-ISO: Fault Isolator module

MISCELLANEOUS ACCESSORIES

FFT-24: 24 Zone Expander

FFT-FPJ: Remote Phone Jack

FFT-RHS: Fire Fighters Remote Hand Set

FFT-HSC: Fire Fighters Handset Cabinet. Holds up to 10 remote handsets

FFT-STSR: Single Telephone Station Recessed. A lockable cabinet containing one remote handset.

FFT-STSS: Single Telephone Station Surface Mount. A lockable cabinet containing one remote handset.

FFT-BGK: Break Glass Kit for FFTSTS

VIP-TR: Flush Mount Trim Ring

For a complete listing of all compliance approvals and certifications, please visit www.silentknight.com.

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

Silent Knight® and Honeywell® are registered trademarks of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, Please call 800-446-6444.

For more information

Learn more about Honeywell Silent Knight and other products by visiting www.silentknight.com

Honeywell Silent Knight

12 Clintonville Road
Northford, CT 06472
800-328-0103

Doc 350810 | Rev B | 05/18
© 2018 Honeywell International Inc.

