


Galaxy® Flex Chart

Flexible security for small to mid-sized installations

Honeywell

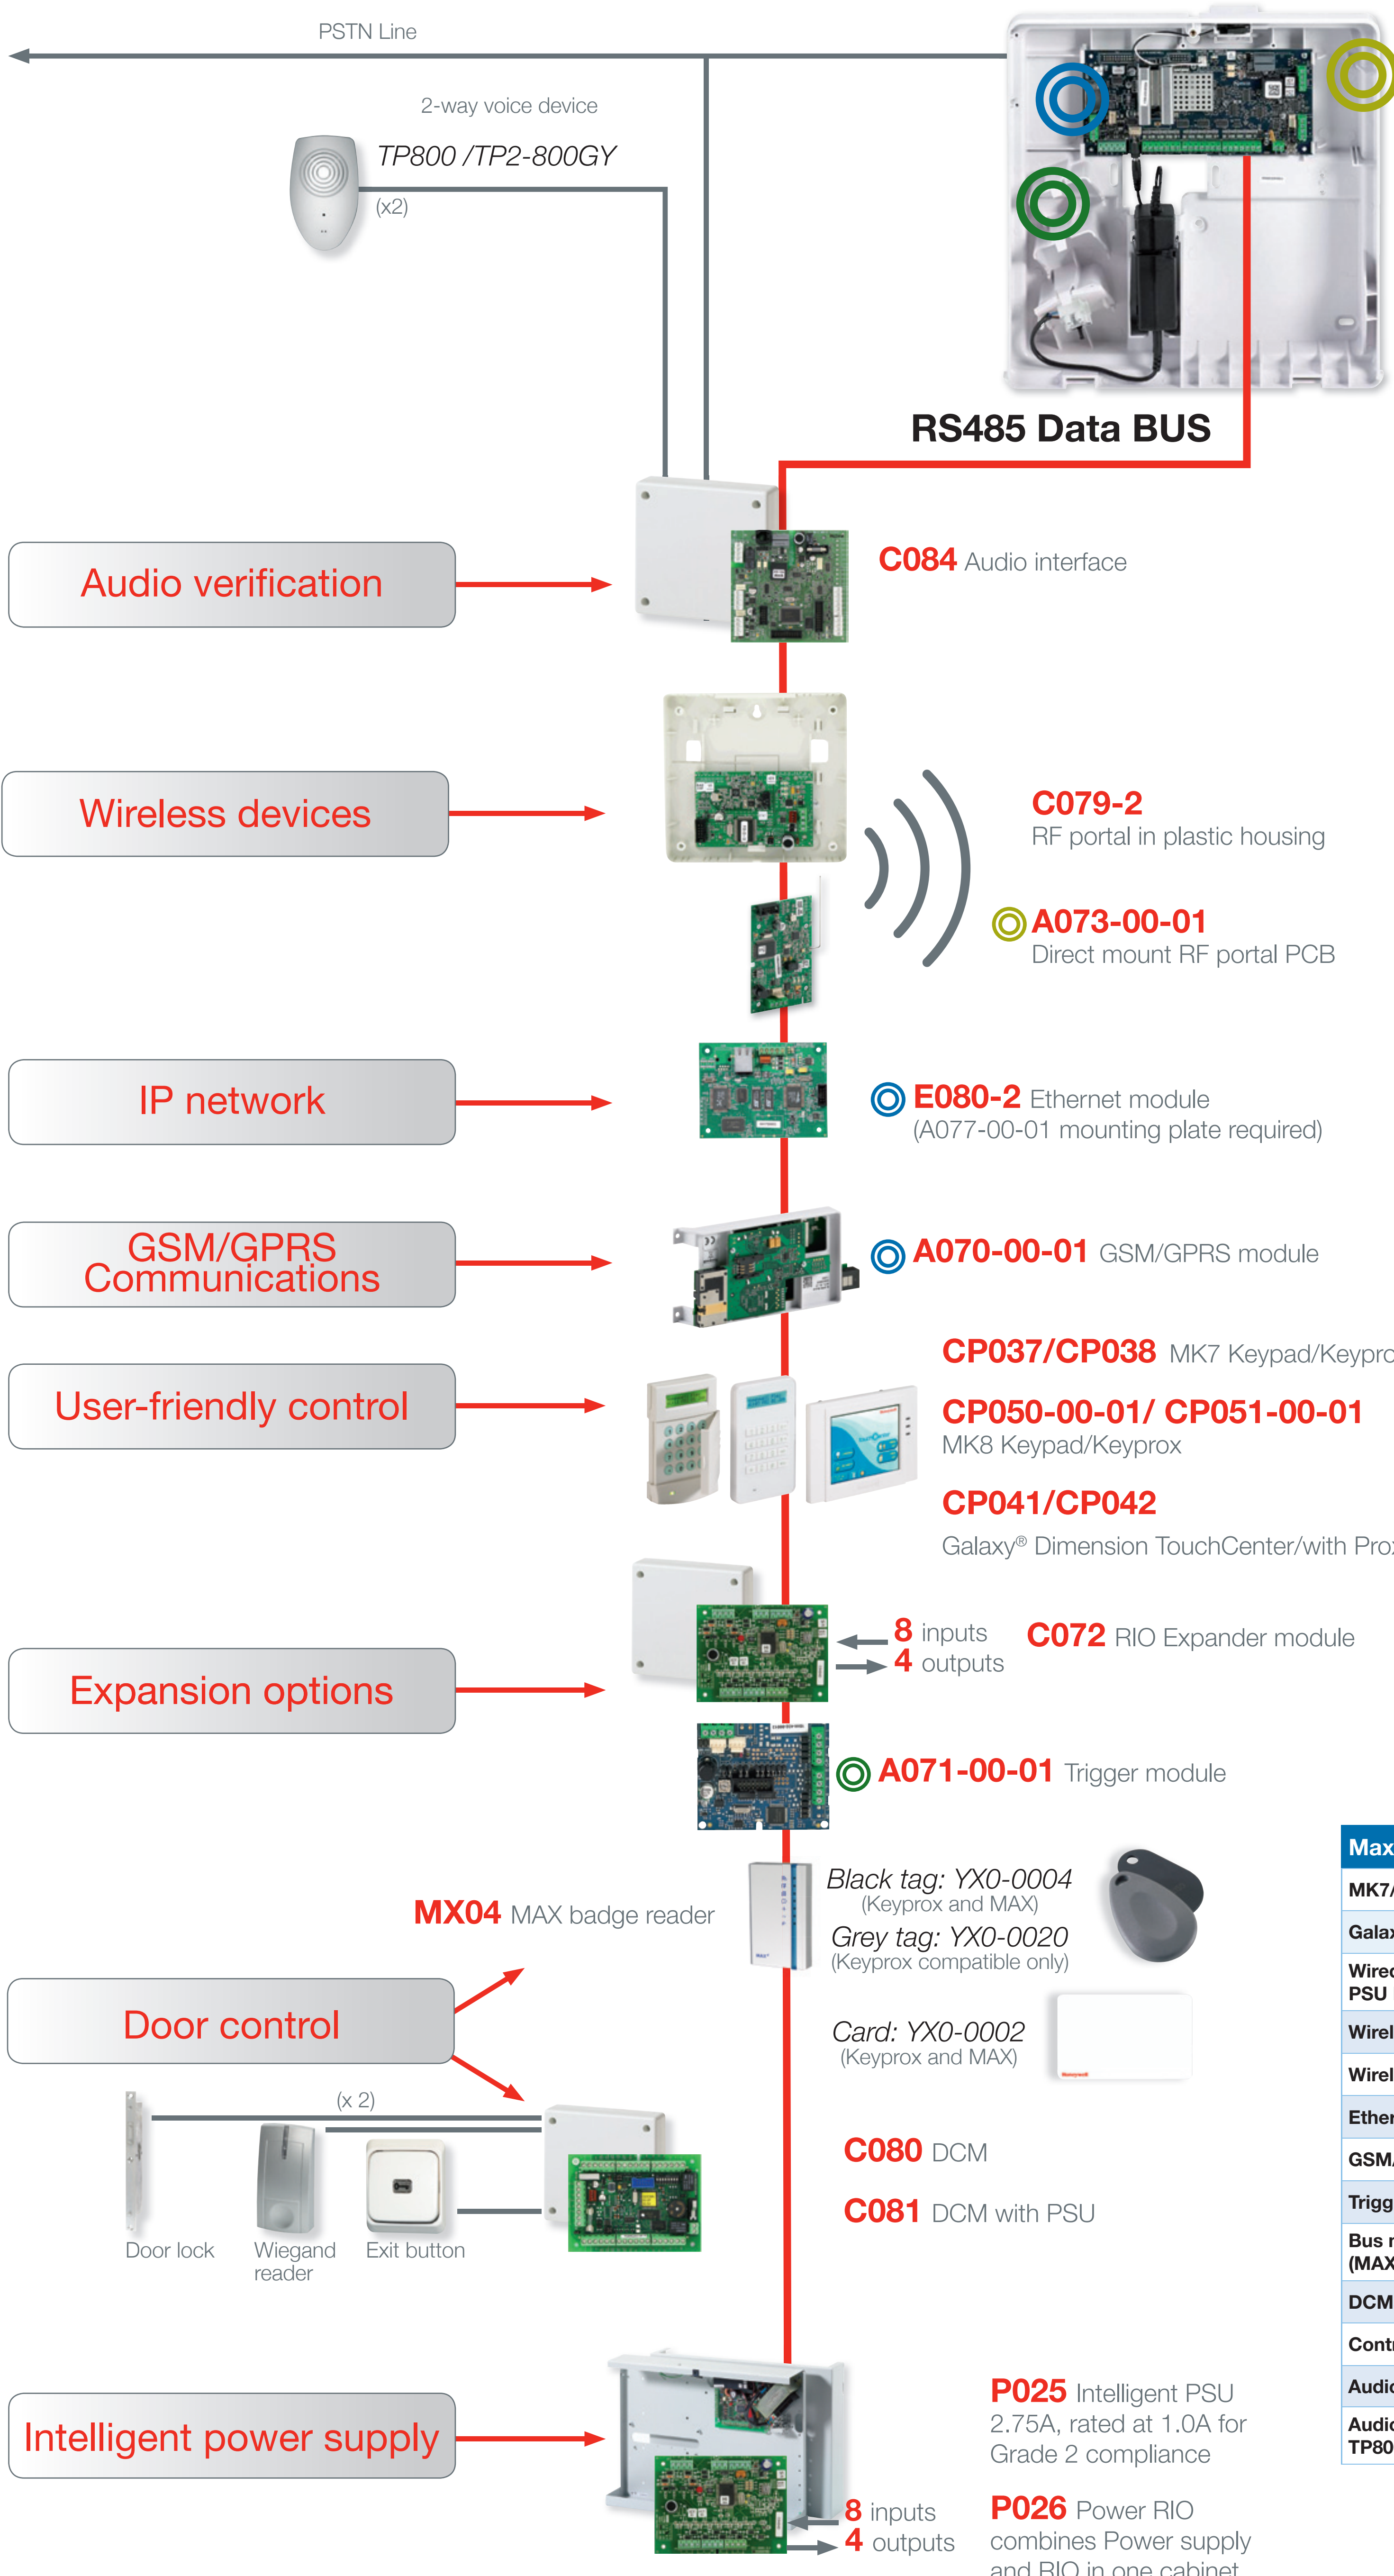

Internal mounting location:

- RF Portal Module**
- GPRS/Ethernet Module**
- Trigger Module**

Remote programming & maintenance



Wireless Peripherals Range

Intrusion Protection			
DT8M DUAL TEC® Motion sensor	IR800M/IRPI800M PIR	FG8M Glass break sensor	
SHK8M/SHKC8M Piezo shock sensor	DO800M Door contact	DODT800GY Door contact	
Portable User Devices			
TCB8M 4-button key fob	TCB800M-1 4-button key fob (bells only)	TCBPA8M-1 Panic alert fob	TCC8M Two-way key fob
Environmental Protection & Life Safety			
DET8M Flood & temperature sensor	DF8M Smoke sensor		

Note: Compatible across Galaxy Flex, Galaxy Dimension (>V6.5) and G2

Maximum capacity	FX020	FX050	FX100
MK7/ MK8 Keypads or keyprox	4	4	8
Galaxy® TouchCenter keypad	1	1	1
Wired zone expander - RIO or PSU RIO	1	5	11
Wireless transceiver/RF portal	8	8	8
Wireless zones	8	40	88
Ethernet module	1	1	1
GSM/GPRS module	1	1	1
Trigger module	1	1	1
Bus mounted proximity readers (MAX)	4	8	8
DCMs	2	4	4
Controlled doors (by DCM)	4	8	8
Audio interface module	1	1	1
Audio channels with TP2-800GY/TP800	2	2	2

Visit www.honeywellgalaxyflex.com for more information on Galaxy Flex and its peripherals.