L-Series Back Boxes

3825 Ohio Avenue, St. Charles, Illinois 60174
800/736-7672, FAX: 630/377-6495
www.systemsensor.com

GENERAL DESCRIPTION

The L-series surface mount back boxes are designed to fit System Sensor L-series devices. They provide a hard surface mounting option for surfaces such as concrete and brick. Models are available in wall and ceiling mounting formats, red and white color options, and by device type.

The L-series surface mount back boxes include a grounding plate and grounding screw for electrical grounding and threaded knockout holes for ½ inch conduit adapters, ¾ inch conduit adapters, or both.

See Model Reference for specific model numbers and descriptions, and specific conduit size(s) supported by each back box.


INSTALLATION

Refer to the System Sensor device manual for specific installation and mounting instructions.

MODEL REFERENCE

Model	Color	Description	Conduit Supported	Dimensions
SBBRL	Red	Wall Surface Mount Back Box, 4x4 Standard Horn, Strobes, and Horn Strobes.	Dual knockouts (½ inch, ¾ inch)	Width: 4.8" (12.2 cm) Height: 5.8" (14.7 cm) Depth: 1.9" (4.8 cm)
SBBWL	White			
SBBGRL	Red	Wall Surface Mount Back Box, 2x4 Compact Horn, Strobes, and Horn Strobes.	½ inch knockouts	Width: 3.6" (cm) Height : 5.4" (cm) Depth: 1.6" (cm)
SBBGWL	White			
SBBCRL	Red	Ceiling Surface Mount Back Box, Horn, Strobes, Horn Strobes, Speakers, and Speaker Strobes	Dual knockouts (½ inch, ¾ inch)	Flange dia.: 6.9" (17.5 cm) Can dia.: 6.3" (16 cm) Depth: 2.5" (6.35 cm)
SBBCWL	White			
SBBSPRL	Red	Wall Surface Mount Back Box, Speakers, and Speaker Strobes	¾ inch knockouts	Width: 5.1" (13 cm) Height : 6.6" (16.8 cm) Depth: 2/25" (5.7 cm)
SBBSPWL	White			

FIGURE 1. SURFACE MOUNT BACK BOX

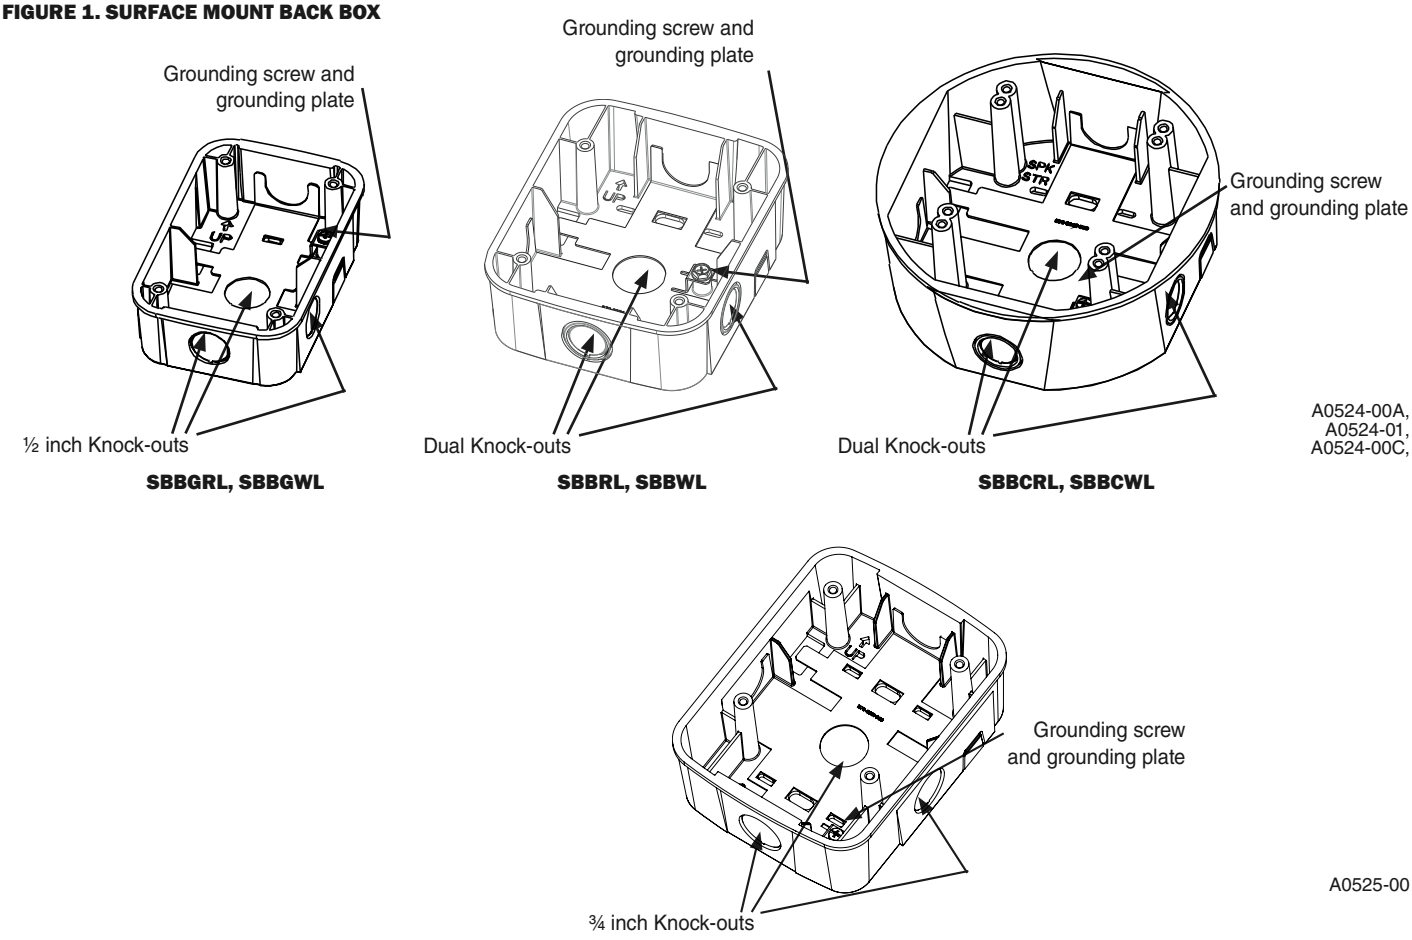

System Sensor® is a registered trademark of Honeywell International, Inc.

©2023 System Sensor. 5/17/2023