ABS-2D Series


Product Installation Document

PN 52032:A3 03/13/2007 06-570

ABS-2D Series cabinets are single-row enclosures for use with network and ACS series annunciators. These cabinets are suitable for both surface mount and semi-flush mount (requires optional trim ring, TR-ABS2D) applications. Trim ring applications require a minimum distance of 0.875 in. (2.22 cm) between the wall and the front of an enclosure.

Available in either black (ABS-2D) or red (ABS-2DR), enclosures in the ABS-2D Series include a backbox, a locking door with a LEXAN® window, and two keys. Three knockouts on the top of the enclosure and two knockouts on the side, bottom, and back provide conduit access.

Product information and enclosure dimensions are as follows:

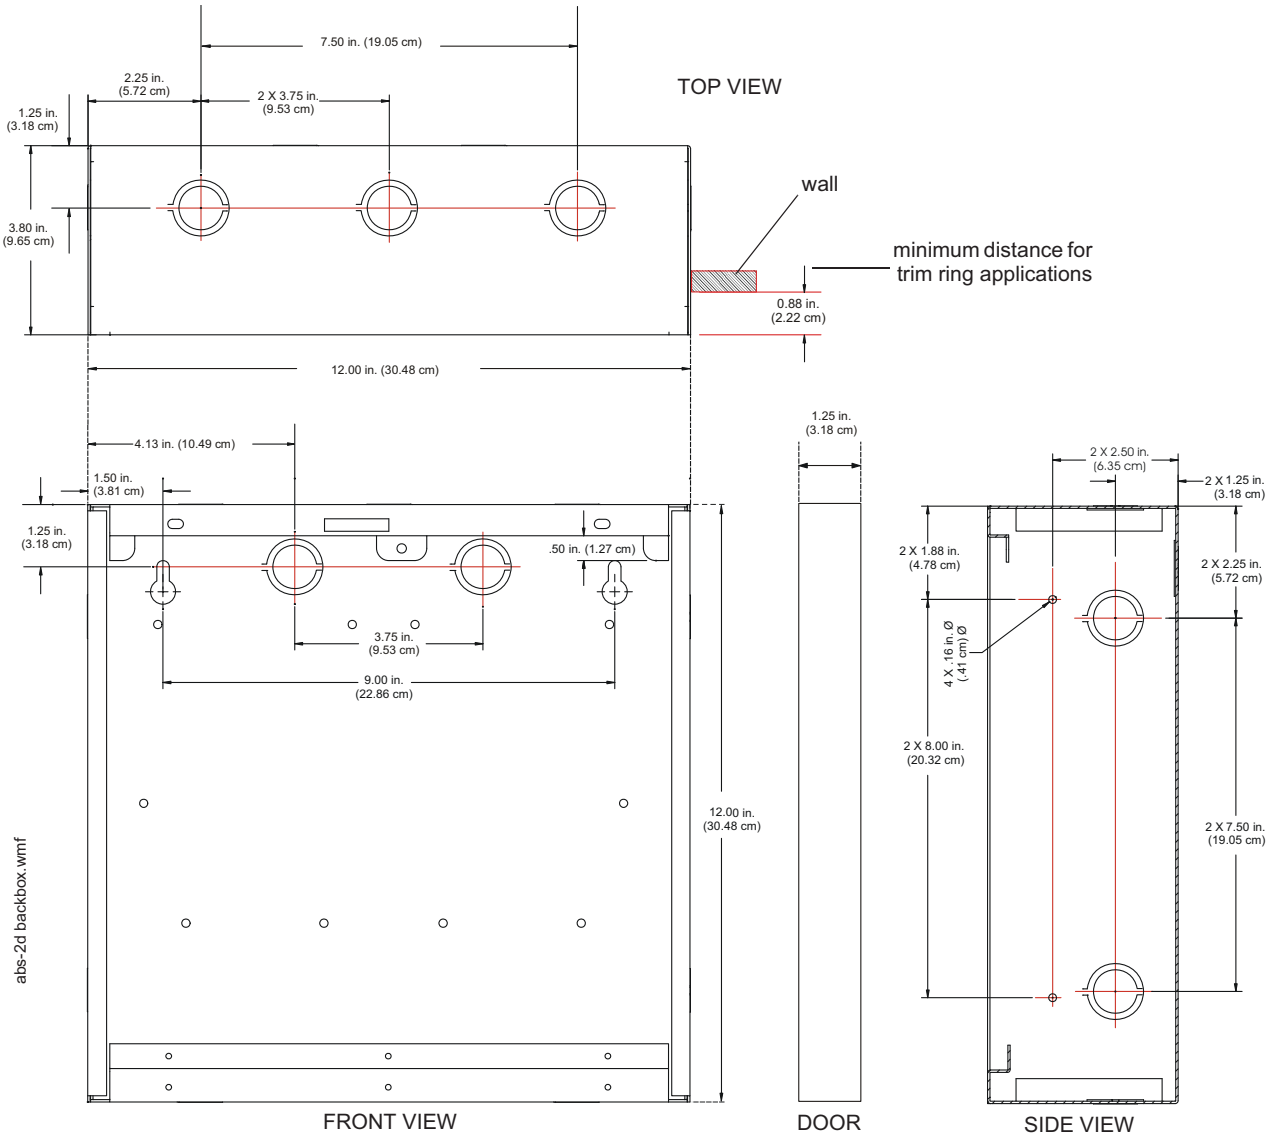

The following hardware is available for use with the ABS-2D Series cabinets:

- **TR-ABS2D**: Optional Trim Ring available in black only
- **CHS-2D:** Optional Chassis mounts 3 layers of equipment (This is necessary to mount the NCA-2 in the ABS-2D.)

Trim Ring dimensions are as follows:

