THUMBLTCH
Product Installation Document

PN LS10076-000GE-E:A 3/11/2013 13-280

The THUMBLTCH is an optional, replacement door-securing mechanism intended to replace a 3/8" offset lock. Use of the THUMBLTCH requires the approval of the local Authority Having Jurisdiction. It is *not* UL 864 or UL 2572 listed.

Installation

1. Unlock the cabinet and open the door.
2. With the door still open, turn the key so the lock is in the locked position.
3. Using a flat-head screwdriver, push in the spring clip until the lock releases from the door. Push in the spring clip on the opposite side and the lock will disengage.

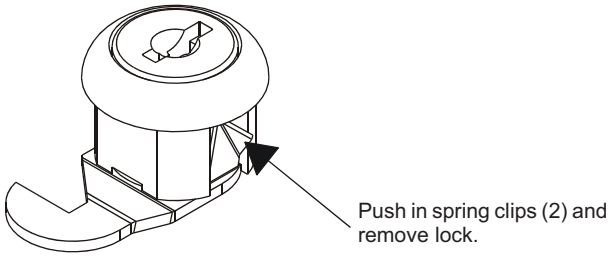


Figure 1 Remove the Lock

4. Insert the thumblatch into the keyhole, cam first, making sure it sits flush with the door.
5. On the inside of the door, slide the nut over the cam and onto the body of the latch. Tighten the nut over the thumblatch until it is secure.

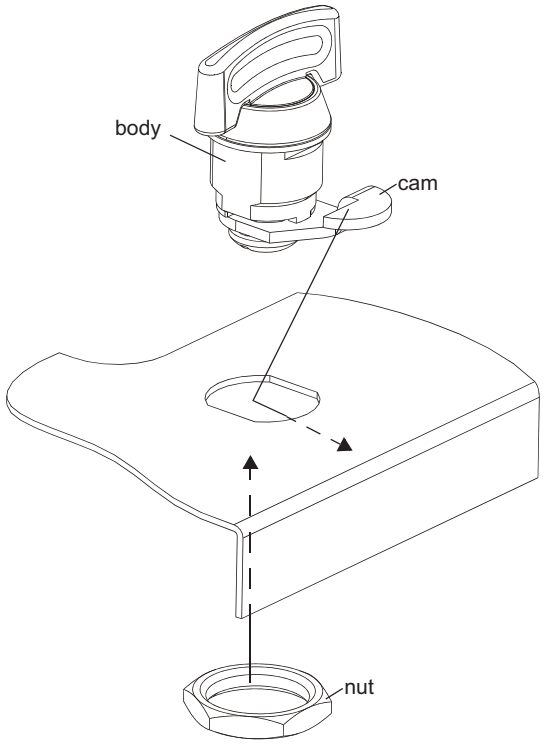


Figure 2 Install the Thumblatch