Gamewell FCI FIRE CONTROL INSTRUMENTS by Honeywell

Technical Bulletin

Date: November 7, 2014 No. T14.3


To: All Gamewell-FCI Distributors

E3 Series Voice Evacuation Listed for Low Frequency Audio

Meet 520Hz Low Frequency listing requirements!!

Gamewell-FCI is pleased to announce that we have achieved UL approval for Low Frequency audio output on E3 Series and selected System Sensor speakers. When using the approved 520Hz audio files on the INI-VG voice gateway unit and AM-50 Series amplifiers on selected System Sensor speakers (see chart below), the E3 Series provide the necessary 520Hz output at the correct sound pressure.

Approved System Sensor SpectrAlert Notification Appliances for 520Hz			
SPS Wall Speaker Strobe	**SP** Wall Speaker	**SPSC** Ceiling Speaker Strobe	**SPC** Ceiling Speaker
For complete part number list, please refer to the attached Low Frequency Notification Appliances datasheet *(PN: 9021-60346)*			

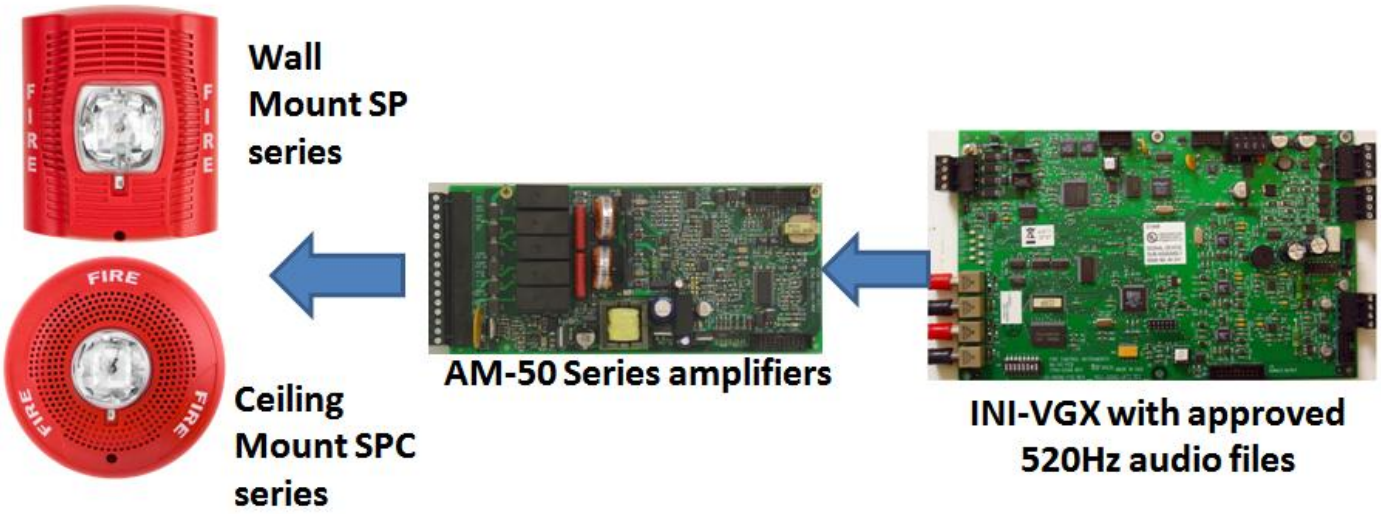

Important – Use of Approved Audio Files

To maintain UL listing between the E3 Series and System Sensor speakers for 520Hz low frequency, you must use the approved audio files that are posted on the Gamewell-FCI ESD site. Temporal 3, Temporal 4 and 10 second Continuous wave files are found under the Voice Messages section: http://www.gamewell-fci.com/esd/voice.htm

For additional information or technical questions pertaining to this bulletin, please contact Gamewell-FCI Technical Services at 1-800-274-4324

Bob Gomersall
Product Marketing Manager
Gamewell-FCI