

Bi-Directional Amplifier (BDA) Solutions

Reliable Two-Way Emergency Radio Communication



Emergency Responders lose communications when radio signals in-building are weakened by structures such as concrete, windows, and metal. Staying informed with clear radio transmissions between first responders inside of a building and emergency personnel outside of the building can help prevent injuries and save lives.

NOTIFIER's Bi-Directional Amplifier (BDA) System is a signal boosting solution designed to enhance in-building radio frequency (RF) signal coverage for public safety radio. When combined with industry leading fire systems, NOTIFIER provides the reliability and quality expected from a life safety solution.

Features and Benefits

- UL2524 for In-building 2-Way Emergency Radio Communication Enhancement Systems listing, CSFM listing
- NFPA 72 2010 Edition, NFPA 1221 2016 Edition and IFC 2018 compliant
- Supports all US public safety frequency bands
- Directly integrates with NOTIFIER Fire Alarm Control Panel
- Single BDA to cover multiple sub-bands with a wider bandpass
- Automatic and self adjusting oscillation prevention and uplink squelch support
- Lower power consumption for long term reliability and efficiency

Reliable Performance


Specifically designed to meet UL2524 In-building 2-Way Emergency Radio Communication Enhancement Systems, NOTIFIER's Class B, Bi-Directional Amplifier Solutions provide a high power, band-selective radio signal booster system that can be designed and customized to meet all public safety frequency band ranges. This state of the art BDA System is developed to provide a high rejection of interfering signals, and is designed for excellent heat dissipation, corrosion resistance and ease of wall-mounting.

NOTIFIER® by Honeywell

RADIO COMMUNICATIONS


IS YOUR BUILDING IN THE EMERGENCY COMMUNICATIONS DEAD ZONE?

First Responders depend on reliable two-way communications when lives and property are at risk.

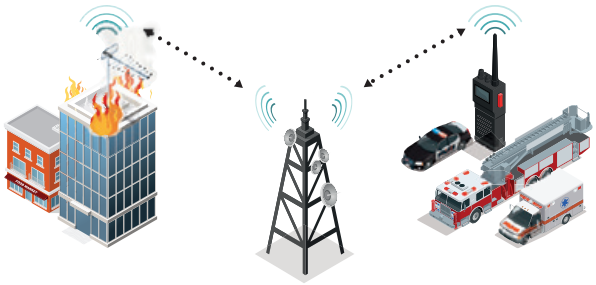

SIGNAL STRENGTH IS IMPAIRED BY:

- RF interference
- Low-E glass windows
- Underground structures
- Obstructions
- Building materials



FIRST RESPONDER COMMUNICATION ISSUES


98.5%
reported building dead spots


Source: International Assoc. of Fire Chiefs Survey | December 2017

56%
experienced in-building communications failure in emergencies
(in the last 2 years)

31%
experienced communications failure
(in the last 6 months)

100% RELIABLE COMMUNICATION

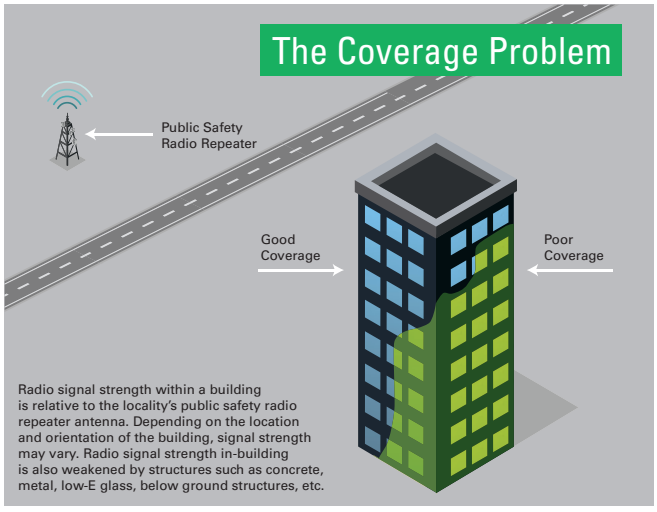

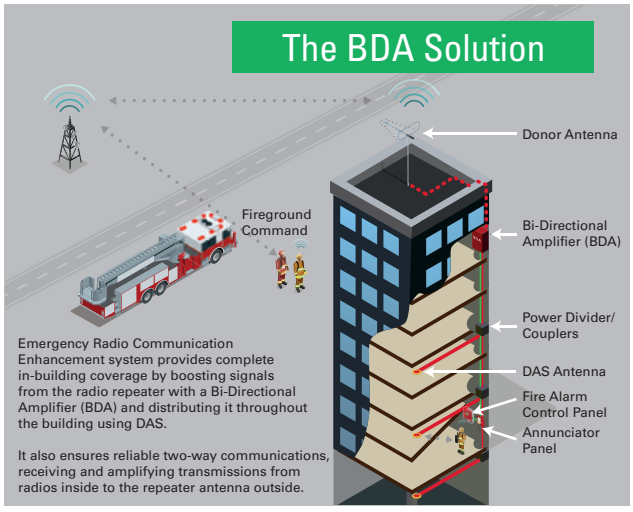

NOTIFIER
12 Clintonville Road
Northford CT 06472
203.484.7161
www.notifier.com

This document is not intended to be used for installation purposes.
We try to keep our product information up-to-date and accurate.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.

©2019 NOTIFIER by Honeywell. All rights reserved.
Unauthorized use of this document is strictly prohibited.

NF_SS_BDA | Rev 01 | 2019-04-22

NOTIFIER® by Honeywell