



Honeywell
Solstice® N40

LOW GWP
AND HIGHER
ENERGY
EFFICIENCY

Solstice® N40

Honeywell

SOLSTICE® N40 (R448A) IS THE MOST ENERGY-EFFICIENT, REDUCED-GWP ALTERNATIVE TO R404A AVAILABLE

The superior energy efficiency of Honeywell Solstice® N40 (R448A) makes it a clear winner compared to R404A. Add in its significantly lower global warming potential — more than two-thirds lower — and it's easy to see why Solstice N40 should be your refrigerant choice for years to come. It's a nonflammable (ASHRAE A1) replacement for R404A or R22 in supermarket applications.

SOLSTICE N40 IS SIMPLY BETTER

As the charts below show, Solstice N40 (R448A) demonstrates lower energy consumption, increased refrigeration capacity and coefficient of performance (COP) compared to R404A.

RAPID, COST-EFFICIENT ADOPTION

Honeywell has made switching to Solstice N40 (R448A) a breeze. It's a near drop-in replacement, so you don't have to worry about a long learning curve. With Solstice N40, you can get right to work.


- Similar operating pressures as HFCs
- Same lubricant as HFCs (POE)
- Compatible with all system components
- Solstice N40 in approval process for use with Copeland Discus and Scroll, Bitzer, Carlyle

RAPID, COST-EFFICIENT ADOPTION


Honeywell has made switching to Solstice N40 (R448A) a breeze. It's a near drop-in replacement, so you don't have to worry about a long learning curve. With Solstice N40, you can get right to work.

- Similar operating pressures as HFCs
- Same lubricant as HFCs (POE)
- Compatible with all system components
- Solstice N40 in approval process for use with Copeland Discus and Scroll, Bitzer, Carlyle

- Low- and medium-temp refrigeration applications
- Nonflammable (ASHRAE A1)
- Near drop-in replacement for R404A
- GWP of 1273 is 68% lower than R404A and 34% lower than R407A
- 5-10% higher energy efficiency than R404A
- Equivalent to R22 performance in low and medium-temp applications

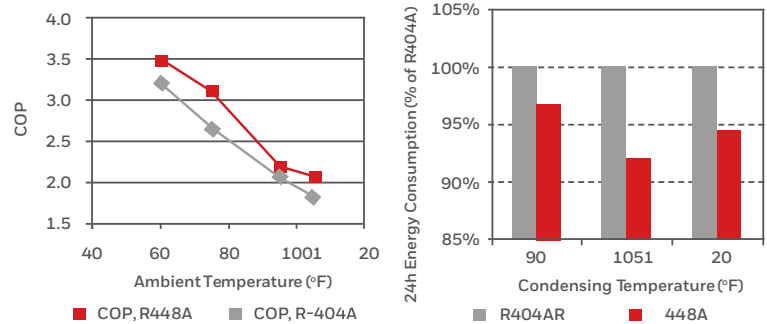

In recent laboratory tests at Emerson Climate Technologies, Solstice N40 demonstrated up to 8% lower energy consumption than R404A.

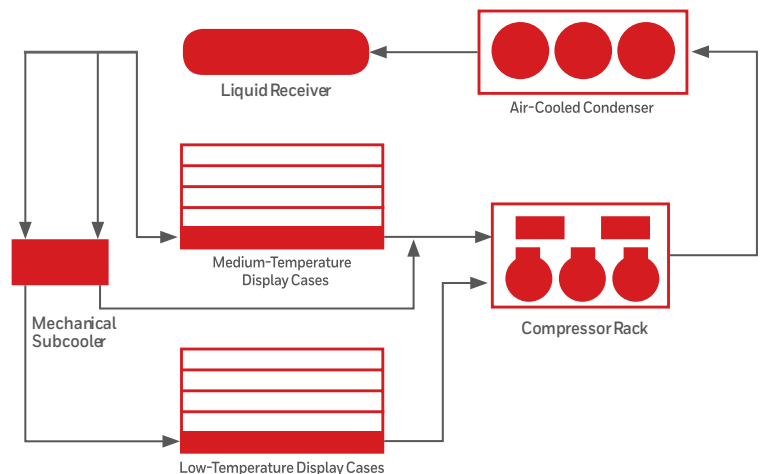

Above: In a full-scale supermarket refrigeration experimental evaluation under controlled laboratory conditions at Oak Ridge National Laboratories, Solstice N40 increased system COP by 11.6% and capacity by 7.5% over the ambient temperature range

Although Honeywell International Inc. believes that the information contained herein is accurate and reliable, it is presented without guarantee or responsibility of any kind and does not constitute any representation or warranty of Honeywell International Inc., either expressed or implied. A number of factors may affect the performance of any products used in conjunction with user's materials, such as other raw materials, application, formulation, environmental factors and manufacturing conditions among others, all of which must be taken into account by the user in producing or using the products. The user should not assume that all necessary data for the proper evaluation of these products are contained herein. Information provided herein does not relieve the user from the responsibility of carrying out its own tests and experiments, and the user assumes all risks and liabilities (including, but not limited to, risks relating to results, patent infringement, regulatory compliance and health, safety and environment) related to the use of the products and/or information contained herein.

For more information:
www.honeywell-refrigerants.com

Honeywell Refrigerants
115 Tabor Road
Morris Plains, NJ 07950
Phone: 1-800-631-8138



4315 FP | November 2019
© 2019 Honeywell International Inc. All rights reserved.

Honeywell