

## Technical Information

RMA803 SmartLine Remote Fieldbus Indicator  
Specification 34-ST-03-90, December 2025**Introduction**

The Honeywell RMA803 is a Foundation Fieldbus remote indicator suitable for use with any Foundation Fieldbus measuring device. The RMA803 allows users to display up to eight (8) values and associated status from devices connected on the same H1 link. The RMA803 can be located anywhere along the Foundation Fieldbus H1 segment providing easy to access data for inaccessible measuring devices or control devices not equipped with displays. The RMA can also provide advanced calculation and or control capability via the use of the optional PID, signal characterizer, arithmetic, input selector, and integrator function blocks.

**Best in Class Features:**

- Foundation Fieldbus Interoperability tested
- Up to eight values can be displayed
- Full graphic display provides bar graph and trending
- Link master capability
- Wide variety of function blocks
- Remote Meter diagnostic displays
- Polarity insensitive electrical connections
- Modular design characteristics
- Dual compartment housing

**Link Active Scheduler**

Transmitters can perform as a backup Link Active Scheduler (LAS) and take over when the host is disconnected. Acting as a LAS, the device ensures scheduled data transfers typically used for the regular, cyclic transfer of control loop data between devices on the Fieldbus.

**Number of Devices/Segment**

Entity IS model: 6 devices/segment

**Schedule Entries**

30 maximum schedule entries

**Number of VCR's: 50 max**

**Compliance Testing:** Tested according to ITK 6.1.1



Figure 1 –RMA803 Remote Indicator

**Software Download**

Utilizes Class-3 of the Common Software Download procedure as per FF-883.

**Integral Keypad**


The RMA803 utilizes an integral three button keypad permitting limited display set-up and operation. Full set up capabilities are available using DD/DTM based configuration tools

**Advanced Graphics LCD Display Features**

- 0, 90, 180, and 270 degree viewing position adjustments
- Standard and custom measurement units available.
- Up to eight display screens with 3 formats are possible (Large PV or PV with Bar Graph or PV with Trend Graph)
- Configurable screen rotation timing (4 to 30 sec)
- Multiple language capability. (EN, GE, FR, IT, SP, RU, TU, CH & JP)
- Ability to enable/disable screen rotation

**Display Screens & Diagnostics**

The RMA803 graphics display is capable of up to 8 displays in any one of 3 formats (Large PV, Bar Graph, and Trend Display). Certain diagnostics for the RMA803 are also accessible (see the accessible parameter listing for details).

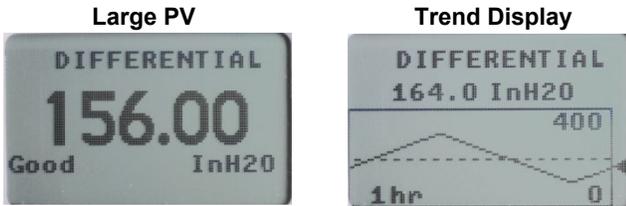

**Bar Graph**



Similar to all other SmartLine products, the display rotation timing and contrast settings are user configurable.

**Function Blocks**

Block Type	Block Description	Permanent Blocks	Supported Instances	Execution Timing
Resource Transducer	Resource	1	n/a	n/a
	LCD Transducer	1	n/a	n/a
	Diagnostic Transducer	1	n/a	n/a
Standard	MAO (Multiple A/O)	1	0	30 ms
Optional	PID	1	1	45 ms
	Signal Characterizer	1	3	30 ms
	Arithmetic	1	3	30 ms
	Input Selector	1	3	30 ms
	Integrator	1	0	30 ms

**Accessible Parameter Listing**

Fieldbus Accessible Parameter Listing	Parameter Type		Available via	
	FF Device	RMA 803	RMA Display	RMA DD
<b>Display Advanced Diagnostics</b>				
Power Failure Tracking Counter	X	√	X	R
Electronics Temperature Tracking	X	√	X	R
Service Life Alarm	X	√	X	R
Time in Service	X	√	X	R
Critical & Non Critical Alarm Details	X	√	R	R
<b>Transmitter configuration</b>				
Tag ID	X	√	X	R/W
<b>Display Transmitter Information</b>				
PV (SV, TV, & QV)	√	X	R	R
PV Status	√	X	R	R
<b>Display SetUp/Configuration</b>				
LCD contrast	X	√	R/W	R/W
<b>Common SetUp</b>				
Language	X	√	R	R/W
Rotation time	X	√	R/W	R/W
Screen Rotation (Enable/Disable)	X	√	R/W	R/W
<b>Screen configuration</b>				
Screen format	X	√	R	R/W
PV selection	X	√	X	R/W
Display units	X	√	R	R/W
Custom units	X	√	R	R/W
Decimals	X	√	R	R/W
Custom Tag	X	√	R	R/W
Display Low limit	X	√	R	R/W
Display High limit	X	√	R	R/W
Trend Duration	X	√	R	R/W
<b>Display Product Information</b>				
<b>Display</b>				
Version number	X	√	R	R
Serial Number	X	√	R	R
Optional Blocks Enable/Disable	X	√	R	R
License Key	X	√	W	W
<b>Electronic Module</b>				
Firmware version	X	√	R	R
Protocol	X	√	R	R
Model Key	X	√	R	R

x- Not available, √ - Available, R – Read Only, R/W – Read/Write, W – Write Only

## Specifications

Operating Conditions						
Parameter	Reference Condition		Operative Limits		Transportation and Storage	
	°C	°F	°C	°F	°C	°F
Ambient Temperature <sup>1</sup>	25±1	77±2	-40 to 70	-4 to 158	-30 to 80	-22 to 175
Humidity (%RH)	10 to 55		0 to 100		0 to 100	

**Note:** LCD display ambient temperature: -30°C to +70°C. LCD display storage temperature: -30°C to +80°C. The display will be slower and may become unreadable as the ambient temperature drops below -20°C to -30°C. It will return to normal functionality once the ambient temperature rises above -20°C.

Physical/Functional Specifications	
Parameter	Description
Supply Voltage	9 - 32Vdc Terminal Voltage
Current Consumption	Steady State: 17.5mA Code Download: 28mA
Vibration:	IEC 60770-1 field or pipeline, vibration (10-2000 Hz: 0.21mm displacement / 3g max acceleration)
Electromagnetic Compatibility	IEC 61326-3-1
Lightning Protection Option	<b>Leakage Current:</b> 10uA max @ 42.4VDC 93C <b>Impulse rating:</b> 8/20uS      5000A (>10 strikes)      10000A (1 strike min.) 10/1000uS    200A (> 300 strikes)
Electronic Housing	Pure Polyester Powder Coated Low Copper (<0.4%)-Aluminum. Meets NEMA 4X, IP66, IP67 and NEMA 7 (explosion proof). All stainless steel housing is optional. Cover O-Ring material : Silicone
Wiring	Accepts up to 16 AWG (1.5 mm diameter).
Mounting Bracket	Carbon Steel (Zinc-Chromate plated) or 316 Stainless Steel. Suitable for wall or 2" (50mm) vertical or horizontal pipe mounting.
Electrical Connections	½"-14 NPT or M20
Dimensions	See <a href="#">Figure 2</a> , <a href="#">Figure 3</a> , <a href="#">Figure 4</a> and <a href="#">Figure 5</a>
Net Weight	2.5 lbs (1,1 kg) with aluminum housing

Performance	
Parameter	Description
Accuracy	Equivalent to connected devices
Display Resolution	Digital Readout: 7 digits, Bar Graph: 128 divisions or 0.78%, Trend: 2.5% of scale
Display Capacity	Up to eight (8) function block outputs
Standard Function Blocks (Execution Times)	Resource (n/a), Transducer (n/a), LCD (n/a), Diagnostic (n/a) & Multiple Analog Output (30ms)
Optional Function Blocks (Execution Times)	PID (45ms), Signal Characterizer (30ms), Arithmetic (30ms), Input Selector (30ms), Integrator (30ms),

## Mounting & Dimensional Drawings

Reference Dimensions:  $\frac{\text{millimeters}}{\text{inches}}$

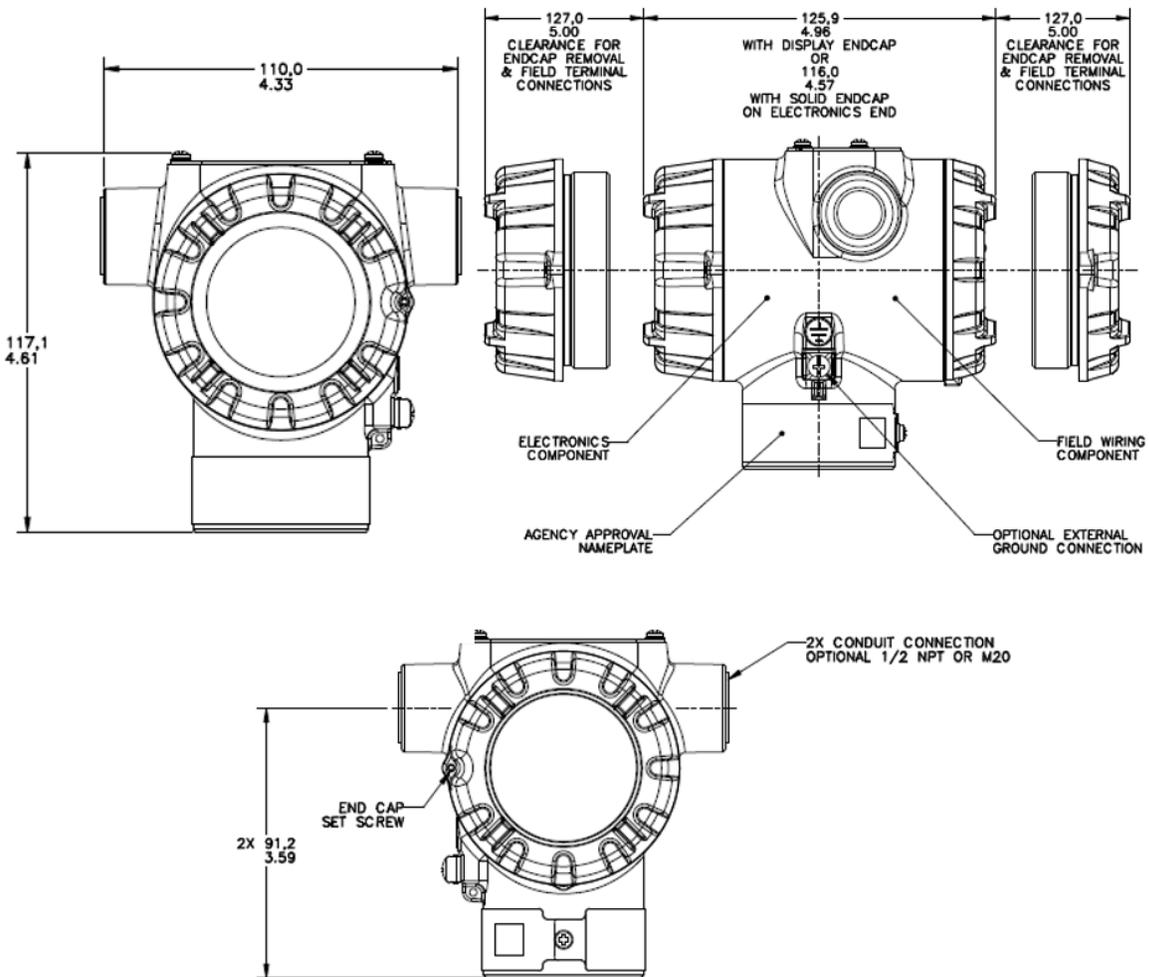
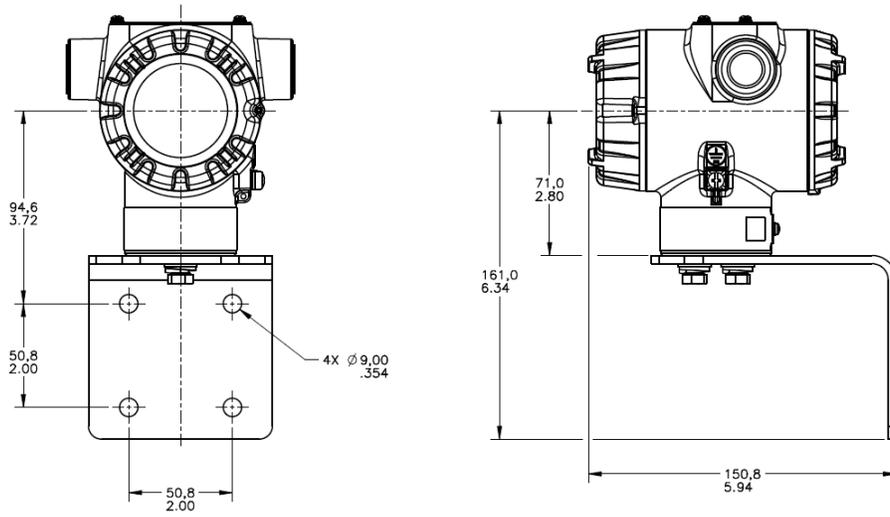



Figure 2 – RMA Dimensions

**Mounting & Dimensional Drawings**

**TRANSMITTER ENCLOSURE CAN BE ROTATED A TOTAL OF 90° FROM THE STANDARD MOUNTING POSITION**




**Figure 3 –Horizontal Wall Mounting**

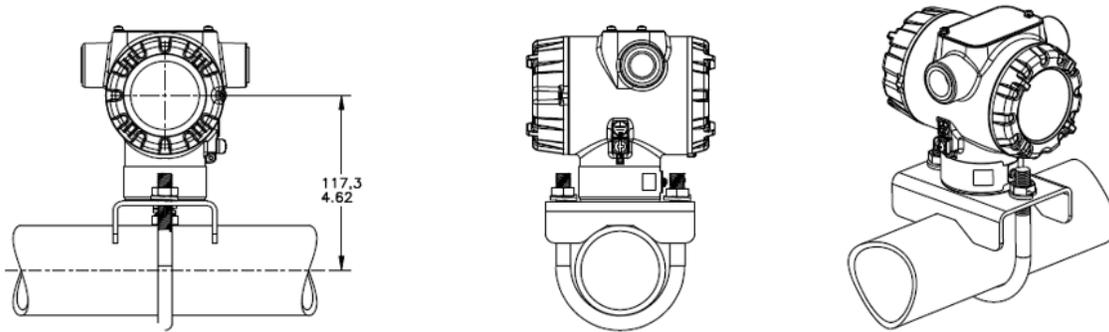

**HORIZONTAL PIPE MOUNT**


TRANSMITTER ENCLOSURE CAN BE ROTATED A TOTAL OF 90° FROM THE MOUNTING POSITION SELECTED

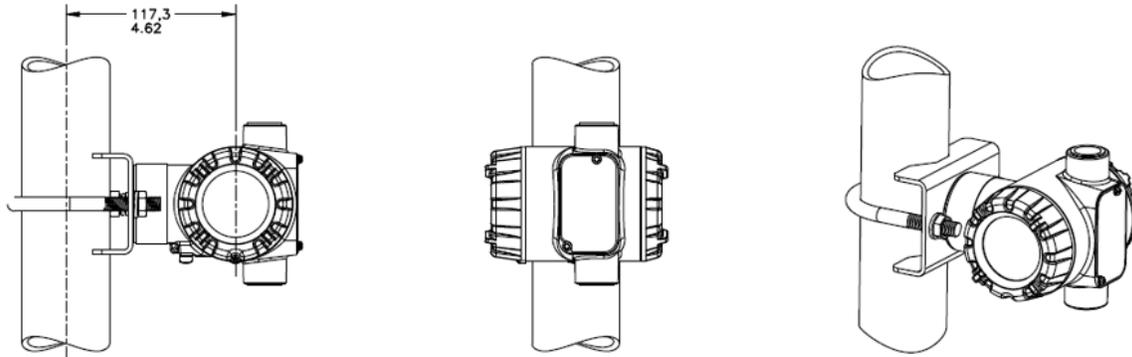

**VERTICAL PIPE MOUNT**

TRANSMITTER ENCLOSURE CAN BE ROTATED A TOTAL OF 90° FROM THE MOUNTING POSITION SELECTED

**Figure 4 – Pipe Mount, Horizontal & Vertical**

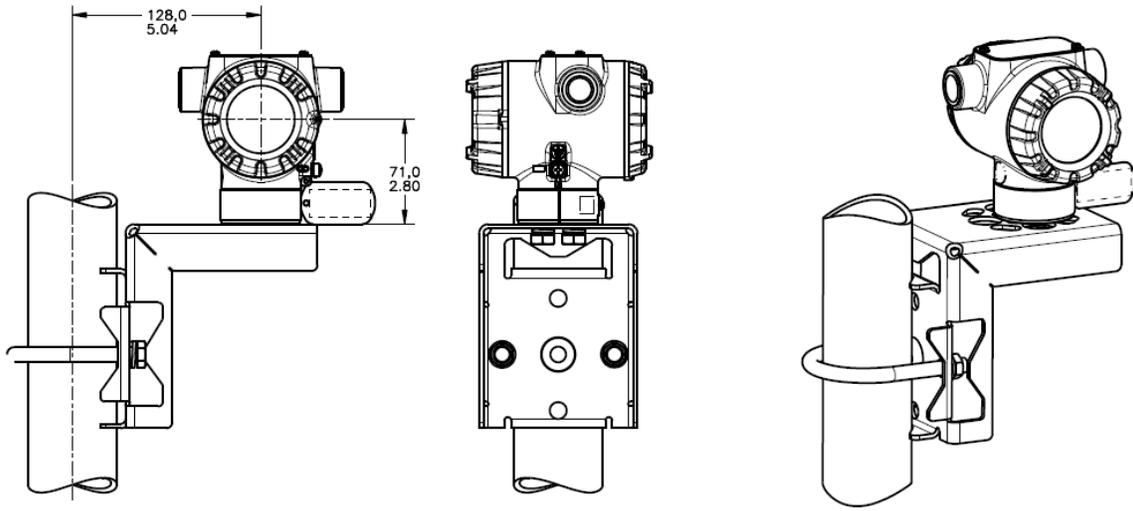

VERTICAL ANGLE BRACKET PIPE MOUNT

**Figure 5 - Pipe Mount, Vertical**

**Approval Certifications:**

MSG CODE	Agency	Type of Protection	Electrical Parameters	Ambient Temperature
A	FM Approvals TM (USA)	Explosion proof Class I, Division 1, Groups A, B, C, D; T6..T4 <b>Dust Ignition Proof:</b> Class II, III, Division 1, Groups E, F, G; T4 Class 1, Zone 1, AEx d IIC T4 Gb Class 2, Zone 21, AEx tb IIIC T 95°C IP 66 Db	Note 1	T6: -50°C to +65°C T4, T5: -50 °C to 85°C
		<b>Intrinsically Safe:</b> Class I, II, III, Division 1, Groups A, B, C, D, E, F, G; T4 Class I Zone 0 AEx ia IIC T4 Ga	Note 2	-50 °C to 70°C
		<b>Non-Incendive</b> Class I, Division 2, Groups A, B, C, D; T4 Class I Zone 2 AEx nA IIC T4 Gc	Note 1	-50 °C to 85°C
		<b>Enclosure:</b> Type 4X/ IP66/ IP67	ALL	ALL
		Standards: FM 3600: 2018;FM 3611: 2018; ANSI/ UL 60079-0: 2013; ANSI/ UL 60079-1: 2015; FM 3610: 2018; ANSI/ UL 60079-11: 2014; FM 3810: 2018; ANSI/ UL 60079-15: 2013; ANSI/ UL 60079-31 : 2015; FM Class 3615: 2018; FM 3616: 2011		
B	CSA-Canada	<b>Explosion proof:</b> CSA 14.2689056 Class I, Division 1, Groups A, B, C, D;T6..T4 <b>Dust Ignition Proof:</b> Class II, III, Division 1, Groups E, F, G; T4 Class I Zone 1 Ex db IIC T4 Gb Ex db IIC T4 Gb Zone 21 Ex tb IIIC T 95oC Db Ex tb IIIC T 95o C Db	Note 1	T6: -50°C to +65°C T4, T5: -50 °C to 85°C
		<b>Intrinsically Safe:</b> CSA 14.2689056 Class I, II, III, Division 1, Groups A, B, C, D, E, F, G; T4 Ex ia IIC T4 Ga	Note 2	-50°C to 70°C
		<b>Non-Incendive</b> CSA 14.2689056 Class I, Division 2, Groups A, B, C, D; T4 Class I Zone 2 Ex nA IIC T4 Gc Ex nA IIC T4 Gc	Note 1	-50°C to 85°C
		<b>Enclosure:</b> Type 4X/ IP66/ IP67	ALL	ALL
		Standards: CSA C22.2 No. 0: 2015; CSA C22.2 No. 30: 2016; CSA C22.2 No. 94-M91; CSA C22.2 No. 25: 2017; CSA C22.2 No. 61010-1: 2017; CSA-C22.2No.157: 2016; C22.2 No. 213: 2017; C22.2 No. CSA 60079-0:2015; C22.2 No. 60079-1: 2016; C22.2 No. 60079-11: 2014; C22.2 No. 60079-15: 2016; C22.2 No. 60079-31: 2015;  ANSI/ ISA12.12.01-2017; ANSI/ ISA 61010-1: 2016; ANSI/ UL 60079-0: 2013; ANSI/ UL 60079-1: 2015; ANSI/ UL 60079-11: 2014; ANSI/ UL 60079-15: 2013; ANSI/ UL 60079-31: 2015 ; FM 3600: 2011; FM 3615: 2006; FM Class 3616: 2011; ANSI/ UL 913: 2015; UL 916: 2015; ANSI/ UL 12.27.01: 2017; ANSI/UL 50E: 2015		
C	ATEX	<b>Flame-proof:</b>  II 2 G Ex d IIC T6..T4 Gb II 2 D Ex tb IIIC T 95°C Db	Note 1	T6: -50°C to +65°C T4, T5: -50 °C to 85°C

		<b>Intrinsically Safe:</b>  II 2 G Ex ia IIC T4 Ga	Note 2	-50°C to 70°C
		<b>Non-Incendive</b>  II 3 G Ex ec IIC T4 Gc	Note 1	-50°C to 85°C
		<b>Enclosure:</b> Type 4X/ IP66/ IP67	ALL	ALL
		STANDARDS: EN IEC 60079-0: 2018; EN 60079-1: 2014; EN 60079-11: 2012; EN 60079-31: 2014; EN 60079-7: 2015+A1 : 2018;		
C	UKEX	<b>Flame-proof:</b>  II 2 G Ex d IIC T6..T4 Gb II 2 D Ex tb IIIC T 95°C Db	Note 1	T6: -50°C to +65°C T4, T5: -50 °C to 85°C
		<b>Intrinsically Safe:</b>  II 2 G Ex ia IIC T4 Ga	Note 2	-50°C to 70°C
		<b>Non-Incendive</b>  II 3 G Ex ec IIC T4 Gc	Note 1	-50°C to 85°C
		<b>Enclosure:</b> Type 4X/ IP66/ IP67	ALL	ALL
		STANDARDS: EN IEC 60079-0: 2018; EN 60079-1: 2014; EN 60079-11: 2012; EN 60079-31: 2014; EN 60079-7: 2015+A1 : 2018;		
D	IECEX	<b>Flame-proof:</b> Ex db IIC T6..T4 Gb Ex tb IIIC T 95o C Db	Note 1	T6: -50°C to +65°C T4, T5: -50 °C to 85°C
		<b>Intrinsically Safe:</b> Ex ia IIC T4 Ga	Note 2	-50°C to 70°C
		<b>Non-Incendive</b> Ex nA IIC T4 Gc	Note 1	-50°C to 70°C
		<b>Enclosure:</b> Type 4X/ IP66/ IP67	ALL	ALL
		<b>STANDARDS:</b> IEC 60079-0: 2017; IEC 60079-1: 2014; IEC 60079-11: 2011; IEC 60079-7: 2017; IEC 60079-31: 2014		
E	SAEx	<b>Flame-proof:</b> Ex db IIC T6..T5 Gb Ex tb IIIC T 95o C Db	Note 1	T6: -20°C to 65°C T95°C, T5: -20°C to 85°C
		<b>Intrinsically Safe:</b> Ex ia IIC T4 Ga Ex ic IIC T4 Gc	Note 2	-20°C to 70°C
		<b>Non-Incendive</b> Ex ec IIC T4 Gc	Note 1	--20°C to 85°C
		<b>Enclosure:</b> IP66/ IP67	ALL	ALL
		<b>STANDARDS:</b> IEC 60079-0: 2011; IEC 60079-1: 2014; IEC 60079-11: 2011; IEC 60079-7: 2006; IEC 60079-31: 2013		
P	CCoE/ PESO	<b>Flame-proof:</b> Ex db IIC T6..T5 Gb	Note 1	T6: 50°C to 65°C T5: -50°C to 85°C
		<b>Intrinsically Safe:</b> Ex ia IIC T4 Ga	Note 2	-50°C to 70°C
		<b>Enclosure:</b> IP66/ IP67	ALL	ALL
		<b>STANDARDS:</b> IEC 60079-0: 2017; IEC 60079-1: 2014; IEC 60079-11: 2011; IEC 60079-7: 2017; IEC 60079-31: 2013		

**Notes:**

Operating Parameters: Voltage= 12 to 42 V, Current = 25 mA, Intrinsically Safe Entity Parameters.

For details see Control Drawing, 50089981.

## Model Selection Guide

The Model Selection Guide is subject to change and is inserted into the specification as guidance only.

# Honeywell

## Model RMA800 Remote Indicator

Model Selection Guide  
34-ST-16-90 Issue 25

Section 13  
Page: RMA8-1  
Effective Date: XX, June 2025

## Model Selection Guide with Price Data

Honeywell Proprietary

**Instructions:** Make selections from all Tables Key through VI using column below the proper arrow. Asterisk indicates availability. Letter (a) refer to restrictions highlighted in the restrictions table. Tables delimited with dashes.

**List Price:** Price equals the sum of prices for all selections made.

Key	I	II	III	IV	V	VI
RMA80	-	-	-	-	-	00000

List Price equals the sum of prices for all selections.



KEY NUMBER	BASE MODEL	Selection
<b>Remote Indicator</b>	DE Protocol or Analog (4-20mA DC) Foundation Fieldbus	RMA801 <input type="button" value="v"/> RMA803 <input type="button" value="v"/>

TABLE I	AGENCY APPROVALS (see data sheet for Approval Code Details)	Selection																											
<b>Approvals</b>	No Approvals Required FM Explosion proof, Intrinsically Safe, Non-incendive, & Dustproof cCSAus Explosion proof, Intrinsically Safe, Non-incendive, & Dustproof ATEX Explosion proof, Intrinsically Safe & Non-incendive IECEX Explosion proof, Intrinsically Safe & Non-incendive cCSAus Explosion proof, Intrinsically Safe, Non-incendive, & Dustproof-Canada & US SAEx Explosion proof, Intrinsically Safe & Non-incendive KOSHA Explosion proof, Intrinsically Safe & Non-incendive CCoE Explosion proof, Intrinsically Safe & Non-incendive	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr><td>0</td><td>*</td><td>*</td></tr> <tr><td>A</td><td></td><td>*</td></tr> <tr><td>B</td><td></td><td>*</td></tr> <tr><td>C</td><td>*</td><td>*</td></tr> <tr><td>D</td><td>*</td><td>*</td></tr> <tr><td>K</td><td>*</td><td></td></tr> <tr><td>E</td><td>*</td><td>*</td></tr> <tr><td>H</td><td>*</td><td></td></tr> <tr><td>P</td><td>*</td><td>*</td></tr> </table>	0	*	*	A		*	B		*	C	*	*	D	*	*	K	*		E	*	*	H	*		P	*	*
0	*	*																											
A		*																											
B		*																											
C	*	*																											
D	*	*																											
K	*																												
E	*	*																											
H	*																												
P	*	*																											

TABLE II	TRANSMITTER ELECTRONICS SELECTIONS			Selection																								
<b>a. Electronic Housing Material &amp; Connection Type</b>	<b>Material</b>	<b>Connection</b>	<b>Lightning Protection</b>	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr><td>A__</td><td>*</td><td>*</td></tr> <tr><td>B__</td><td>*</td><td>*</td></tr> <tr><td>C__</td><td></td><td>*</td></tr> <tr><td>D__</td><td></td><td>*</td></tr> <tr><td>E__</td><td>*</td><td>*</td></tr> <tr><td>F__</td><td>*</td><td>*</td></tr> <tr><td>G__</td><td>*</td><td>*</td></tr> <tr><td>H__</td><td>*</td><td>*</td></tr> </table>	A__	*	*	B__	*	*	C__		*	D__		*	E__	*	*	F__	*	*	G__	*	*	H__	*	*
	A__	*	*																									
	B__	*	*																									
	C__		*																									
	D__		*																									
	E__	*	*																									
	F__	*	*																									
	G__	*	*																									
H__	*	*																										
Polyester Powder Coated Aluminum	1/2 NPT	None																										
Polyester Powder Coated Aluminum	M20	None																										
Polyester Powder Coated Aluminum	1/2 NPT	Yes																										
Polyester Powder Coated Aluminum	M20	Yes																										
316 Stainless Steel (Grade CF8M)	1/2 NPT	None																										
316 Stainless Steel (Grade CF8M)	M20	None																										
316 Stainless Steel (Grade CF8M)	1/2 NPT	Yes																										
316 Stainless Steel (Grade CF8M)	M20	Yes																										
<b>b. Protocol Compatibility</b>	<b>Communications Protocol</b>			<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr><td>_D_</td><td>*</td><td>*</td></tr> <tr><td>_F_</td><td></td><td>*</td></tr> </table>	_D_	*	*	_F_		*																		
_D_	*	*																										
_F_		*																										
<b>c. Customer Interface Selections</b>	<b>Display</b>	<b>External Config Buttons</b>	<b>Languages</b>	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr><td>__A</td><td>*</td><td>*</td></tr> <tr><td>__D</td><td></td><td>*</td></tr> <tr><td>__E</td><td></td><td>*</td></tr> <tr><td>__H</td><td></td><td>*</td></tr> <tr><td>__J</td><td></td><td>*</td></tr> </table>	__A	*	*	__D		*	__E		*	__H		*	__J		*									
	__A	*	*																									
	__D		*																									
	__E		*																									
	__H		*																									
__J		*																										
Standard	None (Integrated on Display)	English																										
Advanced	None	EN, GE, FR, IT, SP, RU, TU																										
Advanced	External	EN, GE, FR, IT, SP, RU, TU																										
Advanced	None	EN, CH, JP																										
Advanced	External	EN, CH, JP																										

TABLE III	CONFIGURATION SELECTIONS		Selection						
<b>a. Application Software</b>	<b>Application Software</b>		<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr><td>1_</td><td>*</td><td>*</td></tr> <tr><td>2_</td><td></td><td>*</td></tr> </table>	1_	*	*	2_		*
	1_	*		*					
2_		*							
Standard Software									
Additional Function Blocks (Fieldbus Only: Adds PID, Char, Arith, Selector & Integ blocks)									
<b>b. Configuration</b>	<b>Factory Configuration</b>	<b>Write Protection</b>	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr><td>_S</td><td>*</td><td>*</td></tr> <tr><td>_T</td><td>*</td><td>*</td></tr> </table>	_S	*	*	_T	*	*
	_S	*		*					
_T	*	*							
Factory Standard	Disabled								
Factory Standard	Enabled								

TABLE IV		ACCESSORY SELECTIONS		RMA803		RMA801			
a. Mounting Bracket	Bracket Type		Material		0	*	*		
	None		None		1	*	*		
	Flat Pipe Mounting Bracket		Carbon Steel		2	*	*		
	Flat Pipe Mounting Bracket		316 Stainless Steel		3	*	*		
	Wall Mounting Bracket		Carbon Steel		4	*	*		
	Wall Mounting Bracket		316 Stainless Steel		6	*	*		
	Angle Pipe Mounting Bracket		Carbon Steel		7	*	*		
Angle Pipe Mounting Bracket		316 Stainless Steel							
b. Customer Tag	Customer Tag Type			_0	*	*			
	No customer tag			_1	*	*			
	One Wired Stainless Steel Tag (Up to 4 lines 26 char/line)			_2	*	*			
Two Wired Stainless Steel Tag (Up to 4 lines 26 char/line)									
c. Unassembled Conduit Plugs & Adapters	Unassembled Conduit Plugs & Adapters			__A0	*	*			
	No Conduit Plugs or Adapters Required			__A2	n	n			
	1/2 NPT Male to 3/4 NPT Female 316 SS Certified Conduit Adapter			__A6	n	n			
	1/2 NPT 316 SS Certified Conduit Plug			__A7	m	m			
M20 316 SS Certified Conduit Plug									
TABLE V		OTHER Certifications & Options:(String in sequence comma delimited (XX, XX, XX,...))							
a. Additional Options	None - No additional options required						00	*	*
	Certificate of Conformance						F3	*	*
	Certificate of Origin						F5	*	*
	Extended Warranty Additional 1 year						01	*	*
	Extended Warranty Additional 2 years						02	*	*
	Extended Warranty Additional 3 years						03	*	*
	Extended Warranty Additional 4 years						04	*	*
Extended Warranty Additional 15 years						15	*	*	
TABLE VI		MANUFACTURING SPECIALS		0000		*		*	
Factory	Factory Identification								
MODEL RESTRICTIONS									
Restriction Letter	Available Only with		Not Available with						
	Table	Selection(s)	Table	Selection(s)					
m	IIa	B, D, F, H							
n	IIa	A, C, E, G							
b	Select only one option from this group								
PRODUCT MANUALS									
Description			Part Number						
RMA801 Remote Meter Assembly HART / DE manual - English			34-ST-25-62						
RMA803 Remote Meter Assembly Foundation Fieldbus manual - English			34-ST-25-51						
All product documentation is available at <a href="http://www.honeywellprocess.com">www.honeywellprocess.com</a> .									

## Sales and Service

For application assistance, current specifications, pricing, or name of the nearest Authorized Distributor, contact one of the offices below.

### ASIA PACIFIC

Honeywell Process Solutions,  
(TAC) [hfs-tac-support@honeywell.com](mailto:hfs-tac-support@honeywell.com)

#### Australia

Honeywell Limited  
Phone: +(61) 7-3846 1255  
FAX: +(61) 7-3840 6481  
Toll Free 1300-36-39-36  
Toll Free Fax:  
1300-36-04-70

#### China – PRC - Shanghai

Honeywell China Inc.  
Phone: (86-21) 5257-4568  
Fax: (86-21) 6237-2826

#### Singapore

Honeywell Pte Ltd.  
Phone: +(65) 6580 3278  
Fax: +(65) 6445-3033

#### South Korea

Honeywell Korea Co Ltd  
Phone: +(822) 799 6114  
Fax: +(822) 792 9015

### EMEA

Honeywell Process Solutions,  
Phone: + 80012026455 or  
+44 (0)1344 656000

Email: (Sales)

[FP-Sales-Apps@Honeywell.com](mailto:FP-Sales-Apps@Honeywell.com)

or

(TAC)

[hfs-tac-support@honeywell.com](mailto:hfs-tac-support@honeywell.com)

### AMERICA'S

Honeywell Process Solutions,  
Phone: (TAC) 1-800-423-9883 or  
215/641-3610  
(Sales) 1-800-343-0228

Email: (Sales)

[FP-Sales-Apps@Honeywell.com](mailto:FP-Sales-Apps@Honeywell.com)

or

(TAC)

[hfs-tac-support@honeywell.com](mailto:hfs-tac-support@honeywell.com)

*Specifications are subject to change without notice.*

### For more information

To learn more about SmartLine RMA Remote Meter,  
visit <https://process.honeywell.com/>  
Or contact your Honeywell Account Manager

### Process Solutions

Honeywell  
1250 W Sam Houston Pkwy S  
Houston, TX 77042

Honeywell Control Systems Ltd  
Honeywell House, Skimped Hill Lane  
Bracknell, England, RG12 1EB

Shanghai City Centre, 100 Jungi Road  
Shanghai, China 20061

<https://process.honeywell.com/>



34-ST-03-90  
December 2025  
©2025 Honeywell International Inc.