



### Electro-pneumatic Tank Level Transmitter – Protected Areas

The CT801LB/S-R Electro-pneumatic Tank Level Transmitter performs remote level measurements based on the bubbler-type principle providing 4-20 mA analog output.

The transmitter's proven reliability has made it the marine industry standard for equipment in this category, with more than 2,000 vessels already equipped.

Approved by major international classification societies, the CT801LB/S-R is designed for top tank mounting. When there is a lack of air or neutral gas supply pressure (below 1 bar), its integrated and automatic non-return valve will close to avoid any liquid return back to the transmitter via the bubbling line.

For pressurized tanks, the level is the deduction of the inert gas pressure (above the liquid) to the hydrostatic pressure measured.

# CT801LB/S-R - Technical Specifications

## Technical Data

<b>Output signal:</b>	4-20 mA
<b>Power supply:</b>	12 to 28 Vdc
<b>Range:</b>	0 to 4000 mbar
<b>Accuracy:</b>	± 0,3% FS at 20°C
<b>Bubbling flow:</b>	10l/h (automatic regulator)
<b>Air supply:</b>	- 4 to 10 bar - Quality 3 - Particle size 5 microns - Pressure Dew point: -20°C - Oil content: 1mg/m3
<b>Protection class:</b>	IP66
<b>Operating temperature:</b>	-20°C +70°C
<b>Bubbling line connection:</b>	1" BSPP

## Special Features

<b>Material:</b>	Brass
<b>Automatic:</b>	- Overpressure valve - Air supply safety valve - Bubbling line non-return valve - Bubbling line cleaning
<b>Connections:</b>	- Pressurized tanks. - Pressure level indicator.


For **mounting in protected area (not on deck).**

Bracket fixation for wall mounting (optional).

## Technical Documentation

<b>Technical manual:</b>	MT5005
<b>Installation manual:</b>	MI5005
<b>Maintenance manual:</b>	MM5005


## Mechanical Fittings & Dimensions

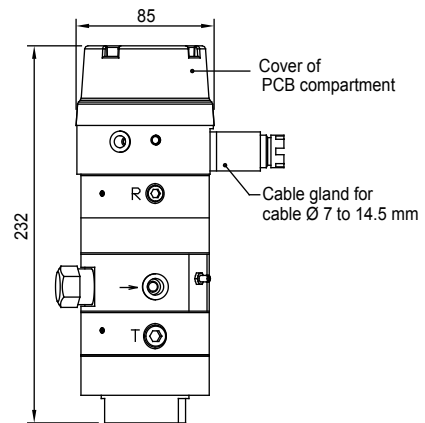


Range to be specified 8 weeks before delivery

Weight : 6,4 Kg

## Mechanical Connection

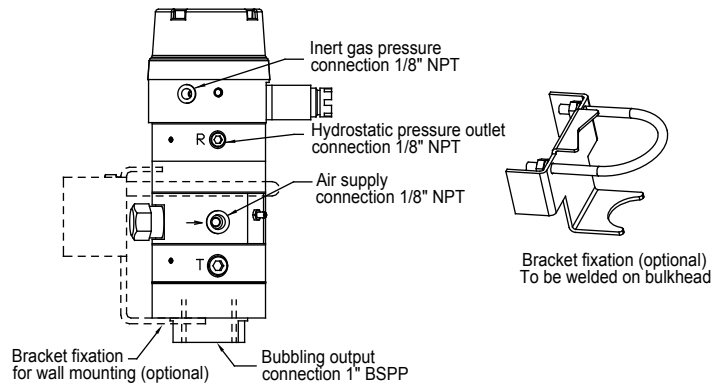

## Electrical Connection



## Honeywell Marine SAS

Bât 59, rue Isaac Newton  
 ZA Port Sec Nord, Esprit 1  
 18000 Bourges – France  
 Phone : + 33 (0) 248 237 901  
 Fax : + 33 (0) 248 237 903  
 E-Mail: contact.marine@honeywell.com  
 www.honeywellmarine.com

HM-11-42-ENG  
 December 2011  
 © 2010 Honeywell International Inc.

**Honeywell**