

## Product Data Sheet 50025 Lumilux<sup>®</sup> White N

[www.honeywell-lumilux.com](http://www.honeywell-lumilux.com)

Main use Afterglow plastic sheets, paints, injection moulding  
 Useable for paints and inks, thermoplastics, thermosetting plastics

### Typical chemical properties

Composition mixture of afterglow phosphors  
 Insoluble in water  
 Decomposition by acids


### Typical physical properties

Appearance whitish powder  
 Specific gravity 4 g/cm<sup>3</sup>  
 Particle size d<sub>50</sub> < 30 μm determined by COULTER<sup>®</sup> LS<sup>™</sup> 230 (Lasersizer)

### Typical luminescent properties

Excitation white light, UV radiation  
 Color of fluorescence white  
 Color of phosphorescence white


### Typical decay curve

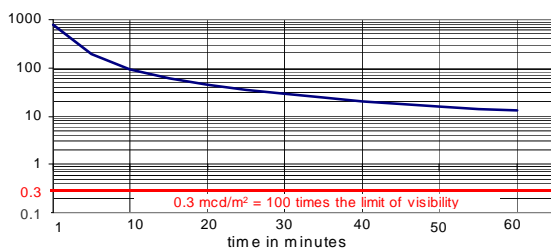

### Typical intensity of afterglow according to the German standard DIN 67510-1: Photoluminescent pigments and products - Part 1: Measurement and marking at the producer

after 10 minutes	60	mcd/m <sup>2</sup>
after 60 minutes	7.5	mcd/m <sup>2</sup>

### Typical excitation (left) and phosphorescence (right) spectra

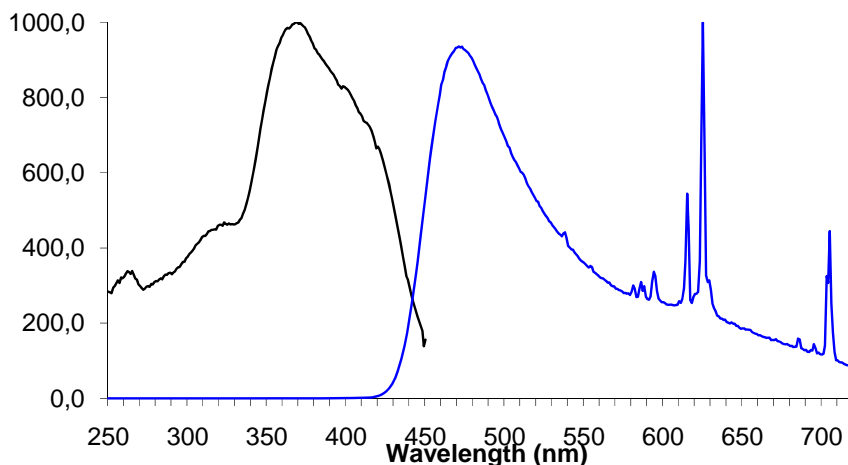

Lumilux<sup>®</sup> is a registered trademark of Honeywell International Inc.

Disclaimer: Although all statements and information in this Product Data Sheet are believed to be accurate and reliable, they are presented without guarantee or warranty of any kind, express or implied, and risks and liability for results obtained by use of the products or application of the suggestions described are assumed by the user. Statements or suggestions concerning possible use of the products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that toxicity data and safety measures are indicated or that other measures may not be required. Further information concerning safe handling procedures can be obtained at <http://www.honeywell.com/sites/sm/lumilux> or by contacting Honeywell.