

Product Data Sheet 50035 Lumilux[®] Red N-WS

www.honeywell-lumilux.com

Main use Afterglow plastic sheets, paints, injection moulding
 Useable for paints and inks, thermoplastics, thermosetting plastics

Typical chemical properties

Composition Oxysulfide, Eu doped
 Insoluble in water
 Decomposition by acids


Typical physical properties

Appearance whitish powder
 Specific gravity 5.1 g/cm³
 Particle size d₅₀ < 40 μm determined by COULTER[®] LS[™] 230 (Lasersizer)

Typical luminescent properties

Excitation white light, UV radiation
 Color of fluorescence orange
 Color of phosphorescence orange


Typical decay curve

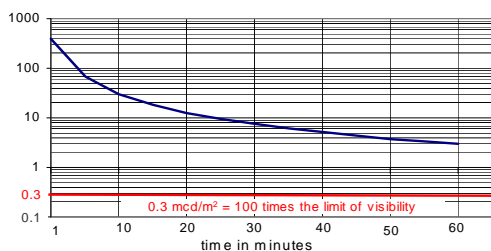

Typical intensity of afterglow according to the German standard DIN 67510-1: Photoluminescent pigments and products - Part 1: Measurement and marking at the producer

after 5 minutes	75	mcd/m ²
after 10 minutes	30	mcd/m ²
after 30 minutes	5	mcd/m ²
after 60 minutes	2	mcd/m ²

Typical excitation (left) and phosphorescence (right) spectra

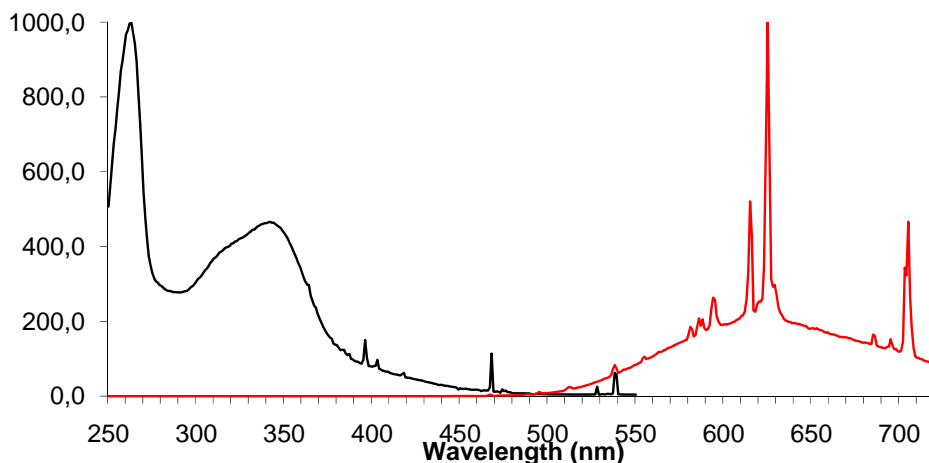

Lumilux[®] is a registered trademark of Honeywell International Inc.

Disclaimer: Although all statements and information in this Product Data Sheet are believed to be accurate and reliable, they are presented without guarantee or warranty of any kind, express or implied, and risks and liability for results obtained by use of the products or application of the suggestions described are assumed by the user. Statements or suggestions concerning possible use of the products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that toxicity data and safety measures are indicated or that other measures may not be required. Further information concerning safe handling procedures can be obtained at <http://www.honeywell.com/sites/sm/lumilux> or by contacting Honeywell.