

# Miller Push-Thru Eye Bolt

Models: 420/22IN, 420NS/

## Description

Spring-action anchorage connector offers simple one-hand installation and can be used for a wide range of applications. Fits 3/4 inches (19mm) diameter holes. The 420/22IN includes the integral SofStop Shock Absorber.

**PLEASE NOTE:** The 420NS/ must be used with a shock-absorbing lanyard.

## Materials

### 420/22IN and 420NS/

**Connector Body:** 303 Stainless Steel and Alloy Steel

### 420/22IN

**D-Ring:** Clear Chromate Finished Carbon Steel, 4-in (102 mm) diameter

**SofStop Cover:** Vinyl

**Webbing:** Polyester

**Thread:** Six-cord bonded three-strand polyester thread.

\*All hardware meets ASTM (50) fifty-hour salt spray test requirements

## Technical

### 420/22IN

**Webbing:** 5,000 lbs (22 kN) min. tensile strength

**D-Ring:** 5,000 lbs (22 kN) min. tensile strength

**Thread:** 42 lbs (19 kg) min. tensile strength

### Maximum Working Load Capacity:

420/22IN: 400 lbs. (181.4 kg)

420NS/: 310 lbs. (140.6)

### Weights

420/22IN: 2.2 lbs. (1kg)

420NS/: 1.6 lbs. (0.7kg)


### Approx. Lengths

420/22IN: 23 inches

420NS/: 9.5 inches

## Certifications

OSHA 1926.502, OSHA 1910.66, ANSI A10.32 and ANSI Z359.1

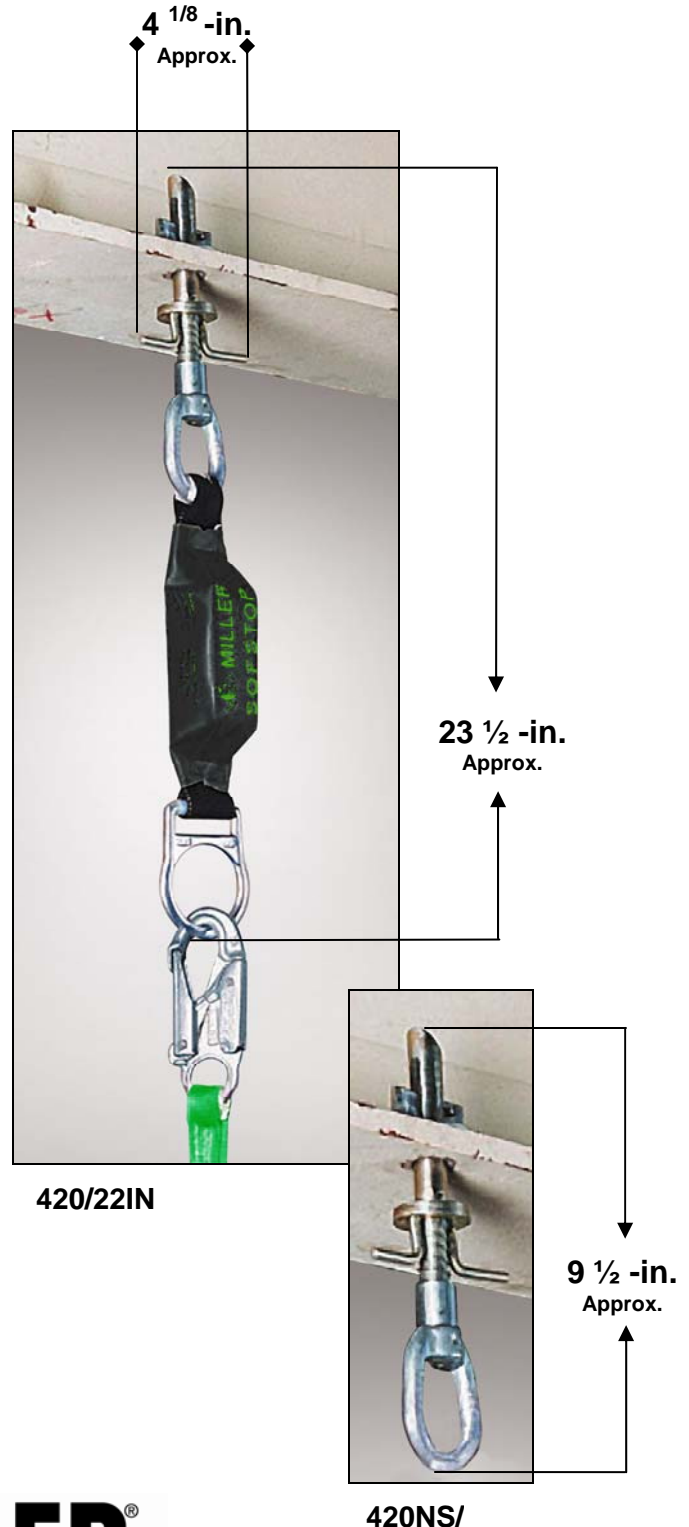

**MILLER**<sup>®</sup>  
by SPERIAN

Toll Free 800.873.5242 • Phone 814.432.2118 • Fax 800.892.4078 • [www.millerfallprotection.com](http://www.millerfallprotection.com)

**⚠WARNING!** THIS DOCUMENT PROVIDES AN OVERVIEW OF FALL PROTECTION PRODUCTS AVAILABLE FROM SPERIAN FALL PROTECTION AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. SPERIAN FALL PROTECTION RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.