

HONEYWELL SALISBURY MODEL 24680-ES ADJUSTABLE BUS BAR CLAMP

TECHNICAL DATA SHEET

Honeywell Salisbury™ high rated ground clamps which offer linemen exceptional reliability and ease-of-use along with the confidence of proven protective compliance.

CERTIFICATION AND TESTING

ASTM Standard	ASTM Type	ASTM Class	ASTM Grade
ASTM F855	I	A	7 / 7H

MECHANICAL DESCRIPTION

Clamp Material	Eyescrew Material	Thread Type	Jaw Type
Aluminum	Stainless Steel	ACME Thread	6.625" Smooth Jaw

Contact Stud Material	Contact Stud Diameter	Contact Stud Length
Tin Plated Copper	1.1 inch / 27.9 mm	7.5 inch / 190.5 mm

ELECTRICAL RATING


Continuous Current Rating, A RMS, 60 Hz	Fault Current, 15 Cycles (AMPS)	Fault Current, 30 Cycles (AMPS)
550	68,000 High X/R (Grade 7H) 74,000 (Grade 7)	54,000 (Grade 7)

MAIN LINE RANGE

Minimum Size	Maximum Size
2.375" (2.375 inch / 60.3 mm Diameter) 2.5" (2.5 inch / 63.5 mm Diameter) Rounds	6.625" (6.625 inch / 168.2 mm Diameter) 6.625" (6.625 inch / 168.2 mm Diameter) Rounds

ORDERING INFORMATION

Part Number	Description	Weight
24680-ES	6.625" Adjustable Bus Bar Clamp	10.6 lbs. / 4.8 kgs

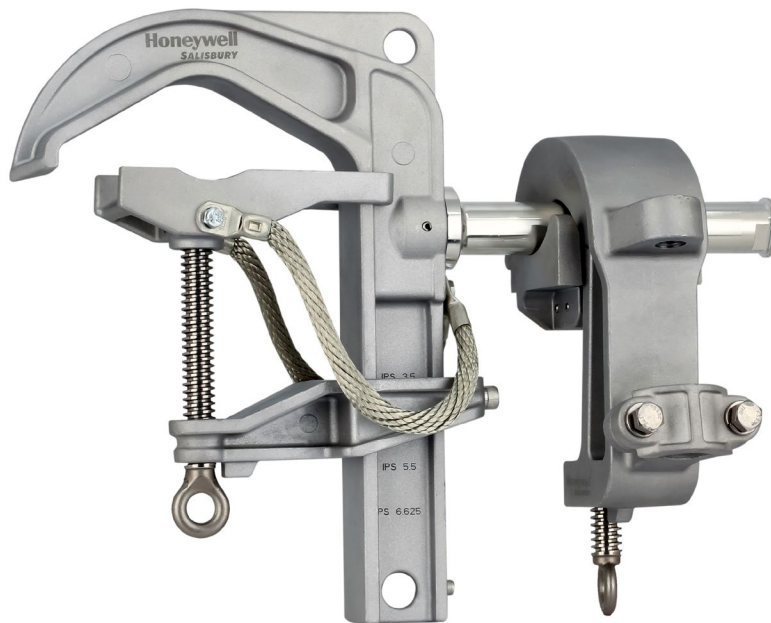

For More Information Visit:
<https://sps.honeywell.com/us/en/products/safety/electrical-safety>
Honeywell Salisbury USA
2520 South Walnut Road
Freeport, IL 61032

Phone within US: 877-406-4501
Phone outside US: 630-343-3800
Product inquiries (US/CAN): cssd@honeywell.com
Product inquiries (INTL): customerservicesalisburyintl@honeywell.com
Orders: salisburyorders@honeywell.com