

MILLER MANYARD® II AND MANYARD HP™ SHOCK-ABSORBING LANYARDS

New!

Now available with lightweight Aluminum Hooks



- Up to 30% lighter than traditional shock-absorbing lanyards
- Corrosion-resistant for longer service life
- Aluminum snap hooks withstand the rigors of harsh environments

Manyard® II Shock-Absorbing Lanyards

FEATURES:

- Reduces tripping hazards – contracts 6 ft. (1.8m) to 4 ft. (1.2m), Manyard II Lanyards greatly reduce the chances of tripping, snagging, or dragging
- Specially-woven shock-absorbing inner core smoothly expands up to 42 inches (1.1m) to reduce fall arrest forces
- A heavy-duty outer jacket serves as a wear indicator and back-up strap to the red inner core for added safety
- Unique warning flag provides visual proof that a lanyard has been involved in a fall and must be removed from service
- Working load of 310 pounds



SKU	Standard Length	Number of Legs	Harness Connection	Anchorage Connection	Special Features	Weight
MANYARD II SHOCK-ABSORBING LANYARDS						
ANSI A10.32						
216MAL/6FTGN	6' (1.8m)	One	Aluminum Locking Snap Hook	Aluminum Locking Snap Hook	Warning flag	1.6 lbs. (0.7 kg)
219MAL/6FTGN	6' (1.8m)	One	Aluminum Locking Snap Hook	Aluminum Locking Rebar Hook	Warning flag	2.4 lbs. (1.1 kg)
231MAL/6FTGN	6' (1.8m)	Two	Aluminum Locking Snap Hook	Aluminum Locking Rebar Hooks	Warning flag	4.2 lbs. (2.0 kg)
232MAL/6FTGN	6' (1.8m)	Two	Aluminum Locking Snap Hook	Aluminum Locking Snap Hooks	Warning flag	2.8 lbs. (1.3 kg)
233MAL/6FTGN	6' (1.8m)	One	Choke-Off Loop	Aluminum Locking Snap Hook	Warning flag	1.3 lbs. (0.6 kg)
233MRAL/6FTGN	6' (1.8m)	One	Choke-Off Loop	Aluminum Locking Rebar Hook	Warning flag	2.1 lbs. (1.0 kg)

Meets all applicable OSHA and ANSI Standards. Note: Aluminum Locking Snap Hook – 3/4-inch (19mm) gate opening; Aluminum Locking Rebar Hook – 2-1/2 inch (63mm) gate opening.

Manyard HP™ Shock-Absorbing Lanyards

With 20 years of design refinement, the “Original” Manyard HP and Manyard Shock-Absorbing Lanyards are unsurpassed in the market.


FEATURES:

- Specially-woven shock-absorbing inner core smoothly expands up to 42 inches (1.1m) to reduce fall arrest forces
- Heavy-duty tubular outer jacket serves as a back-up web lanyard
- Unique warning flag provides visual proof that a lanyard has been involved in a fall and must be removed from service



Shock-Absorbing Lanyards: Before and After Deployment

Always know your fall distance and select proper equipment to meet the fall clearance.

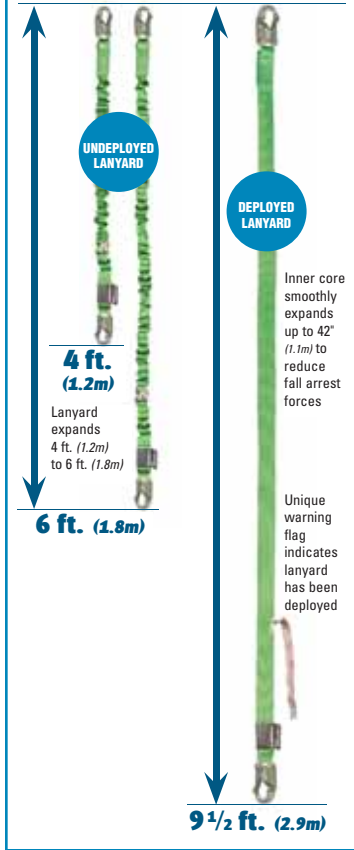

SKU	Standard Length	Number of Legs	Harness Connection	Anchorage Connection	Special Features	Weight
MANYARD HP™ SHOCK-ABSORBING LANYARDS						
<i>ANSI A10.32</i>						
216WAL/6FTGN	6' (1.8m)	One	Aluminum Locking Snap Hook	Aluminum Locking Snap Hook	Warning flag	1.5 lbs. (0.7 kg)
219WAL/6FTGN	6' (1.8m)	One	Aluminum Locking Snap Hook	Aluminum Locking Rebar Hook	Warning flag	2.3 lbs. (1.0 kg)
231WAL/6FTGN	6' (1.8m)	Two	Aluminum Locking Snap Hook	Aluminum Locking Rebar Hooks	Warning flag	4.0 lbs. (1.8 kg)
232WAL/6FTGN	6' (1.8m)	Two	Aluminum Locking Snap Hook	Aluminum Locking Snap Hooks	Warning flag	2.5 lbs. (1.1 kg)
233WAL/6FTGN	6' (1.8m)	One	Choke-Off Loop	Aluminum Locking Snap Hook	Warning flag	1.3 lbs. (0.6 kg)
233WRAL/6FTGN	6' (1.8m)	One	Choke-Off Loop	Aluminum Locking Rebar Hook	Warning flag	2.1 lbs. (1.0 kg)

Meets all applicable OSHA and ANSI Standards. Note: Aluminum Locking Snap Hook – 3/4-inch (19mm) gate opening; Aluminum Locking Rebar Hook – 2-1/2 inch (63mm) gate opening.

This equipment should only be used after reading the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.



by Honeywell

▶ Ask the Expert ... Ask Miller.

800/873-5242
or 814/432-2118

Fax 800/892-4078
or Fax 814/432-2415

www.millerfallprotection.com



For more information or to place an order, please contact your Miller® distributor: