

Miller Grip Portable/Reusable Anchorage Connectors Models: 496 and 496

Description

The Miller Grip 496 and 497 portable/reusable anchorage connectors are designed for use in a fully-cured concrete hole with minimum compression strength of 3,000 psi.

Materials*

- | | |
|----------------------|---------------------------|
| 1. Spoon Wedges: | Stainless Steel |
| 2. End Fitting: | Stainless Steel |
| 3. Cleaning Bushing: | Stainless Steel |
| 4. Stop Sleeve: | Stainless Steel |
| 5. Main Cable: | 7x19 Galvanized |
| 6. Swage: | Zinc Coated Copper |
| 7. Wire Guide: | Polyurethane |
| 8. Return Wire: | 1x19 Galvanized |
| 9. Trigger: | Aluminum |
| 10. Spring: | Zinc-plated Spring Steel |
| 11. Thimble: | |
| 496: | Polyurethane |
| 497: | Steel w/Green Powder Coat |

*All hardware meets ASTM (50) fifty-hour salt spray test requirements.

Technical

Max Working Load: 400 lbs. (181kg)

Certification


Meets all ANSI A10.32, Z359.1 and OSHA 1926.502 requirements.



497 Grip Application



496 Grip Application

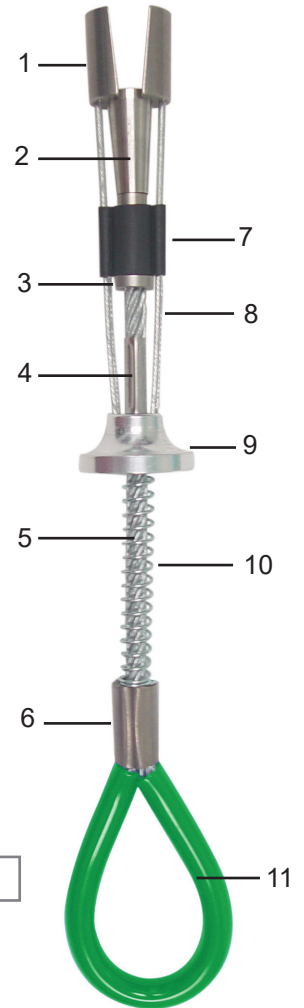

*Model 497 Shown

Model	Hole Diameter	Weight	Description
496	3/4" (19 mm)	0.45 lbs. (0.20 kg)	5,000 lb. (2,268kg) ultimate strength; for single user connection; 400 lbs. (181.4kg) maximum capacity
497	1" (25 mm)	1.15 lbs. (0.53 kg)	10,000 lb. (4,536kg) ultimate strength; for single user connection; 400 lbs. (181.4kg) maximum capacity

Limitless Possibilities. Ask the Expert.

Technical Service: 800.873.5242
www.millerfallprotection.com

Honeywell Industrial Safety

900 Douglas Pike
Smithfield, RI 02917

USA

Phone: 800.430.5490
Fax: 800.322.1330

Canada

Phone: 888.212.7233
Fax: 888.667.8477

⚠ This equipment should only be used after reading and understanding the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.