

Miller Grip Portable/Reusable Anchorage Connectors

(Not designed for fall protection use)

Models: 498 and 499

Description

The Miller Grip 498 and 499 portable/reusable multi-use connectors are designed for use in a fully-cured concrete with minimum compression strength of 3,000 psi or rock substrate.


Materials*

- | | |
|----------------------|--------------------------|
| 1. Spoon Wedges: | Stainless Steel |
| 2. End Fitting: | Stainless Steel |
| 3. Cleaning Bushing: | Stainless Steel |
| 4. Stop Sleeve: | Stainless Steel |
| 5. Main Cable: | 7x19 Galvanized |
| 6. Swage: | Zinc Coated Copper |
| 7. Wire Guide: | Polyurethane |
| 8. Return Wire: | 1x19 Galvanized |
| 9. Trigger: | Aluminum |
| 10. Spring: | Zinc-plated Spring Steel |
| 11. Thimble: | Galvanized Steel |

*All hardware meets ASTM (50) fifty-hour salt spray test requirements.



498 Grip Application

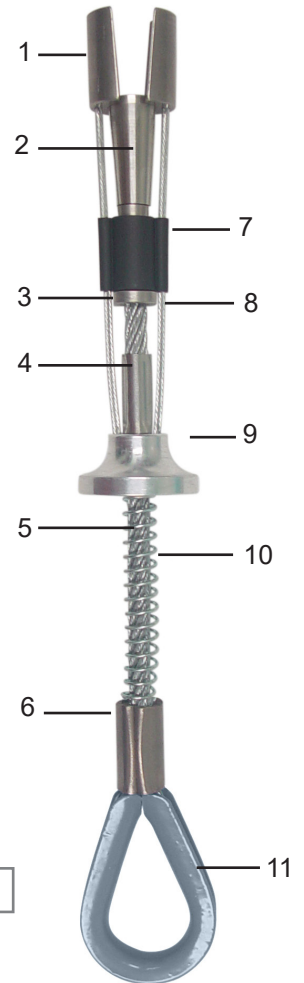

*Model 499 Shown

Model	Hole Diameter	Weight	Description
498	3/4" (19 mm)	0.50lbs (0.23kg)	1,000 lb. (453.6 kg) max. safe working load for multi-use connection (NOT for fall protection use)
499	1" (25 mm)	1.15lbs (0.53kg)	2,000 lb. (907.2 kg) max. safe working load for multi-use connection (NOT for fall protection use)

Limitless Possibilities. Ask the Expert.

Technical Service: 800.873.5242
www.millerfallprotection.com

Honeywell Industrial Safety

900 Douglas Pike
Smithfield, RI 02917

USA

Phone: 800.430.5490
Fax: 800.322.1330

Canada

Phone: 888.212.7233
Fax: 888.667.8477

⚠ This equipment should only be used after reading and understanding the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.