

Miller Cross-Arm Anchorage Connectors

Description

Miller Cross-Arm Anchorage Connectors wrap around I-beams and other structures to form a secure attachment point for lanyards and other connecting devices.

Materials

Webbing: 2" (50mm) Polyester webbing; Nomex/Kevlar webbing in 8185K

D-Rings: Alloy Steel

Thread: Polyester thread for most; Kevlar straps use Kevlar thread

Protective

Sleeve: Nylon

Labels: Valeron

*All hardware meets ASTM (50) fifty-hour salt spray test requirements

Kevlar® and Nomex® are registered trademarks of E.I. DuPont.

Technical

Maximum Capacity: 400 lbs (181.4 kg)

ANSI Capacity: 130-310 Lbs (59-141 kg)

Webbing: 5,000 lbs (22 kN) minimum tensile strength


D-Rings: 5,000 lbs (22 kN) minimum tensile strength

***Length:** 6 ft (1.8m) standard length
*Additional lengths available

Certification

OSHA 1926.502, OSHA 1910.66, ANSI A10.32 and ANSI Z359.1

8183

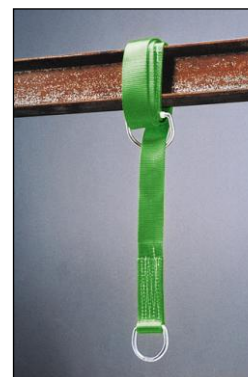

8185K

Model Number	Description
8183	Green webbing, a 2 in. (50mm) steel D-ring and a 3 in. (76mm) steel D-ring
8183D	Blue webbing, a 2 in. (50mm) steel D-ring and a 3 in. (76mm) steel D-ring
8183WS	Green webbing with protective sleeve, a 2 in. (50mm) steel D-ring and a 3 in. (76mm) steel D-ring
8185	Green webbing, a 2 in. (50mm) steel D-ring and a web loop
8185K	Black or blue Nomex/Kevlar webbing, a 2 in. (50mm) steel D-ring and a web loop
T7314	Titan® orange webbing, a 2 in. (50mm) steel D-ring and a web loop



by Honeywell

Toll Free 800.873.5242 (press 4) • hsptechsupport@honeywell.com • www.millerfallprotection.com

⚠ WARNING! THIS DOCUMENT PROVIDES AN OVERVIEW OF FALL PROTECTION PRODUCTS AVAILABLE FROM HONEYWELL AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. HONEYWELL RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.