

Miller Push-Thru Eye Bolt

Models: 420/22IN, 420NS/

Description

Spring-action anchorage connector offers simple one-hand installation and can be used for a wide range of applications. Fits 3/4 inches (19mm) diameter holes. The 420/22IN includes the integral SofStop Shock Absorber.

PLEASE NOTE: The 420NS/ must be used with a shock-absorbing lanyard.

Materials

420/22IN and 420NS/

Connector Body: 303 Stainless Steel and Alloy Steel

420/22IN

D-Ring: Clear Chromate Finished Carbon Steel, 4-in (102 mm) diameter

SofStop Cover: Vinyl

Webbing: Polyester

Thread: Six-cord bonded three-strand polyester thread.

*All hardware meets ASTM (50) fifty-hour salt spray test requirements

Technical

420/22IN

Webbing: 5,000 lbs (22 kN) min. tensile strength

D-Ring: 5,000 lbs (22 kN) min. tensile strength

Thread: 42 lbs (19 kg) min. tensile strength

Maximum Working Load Capacity:

420/22IN: 310 lbs. (140.6 kg)

420NS/: 400 lbs. (140.6 kg)

Weights

420/22IN: 2.2 lbs. (1kg)

420NS/: 1.6 lbs. (0.7kg)


Approx. Lengths

420/22IN: 23 inches

420NS/: 9.5 inches

Certifications

OSHA 1926.502, OSHA 1910.66, ANSI A10.32 and ANSI Z359.1

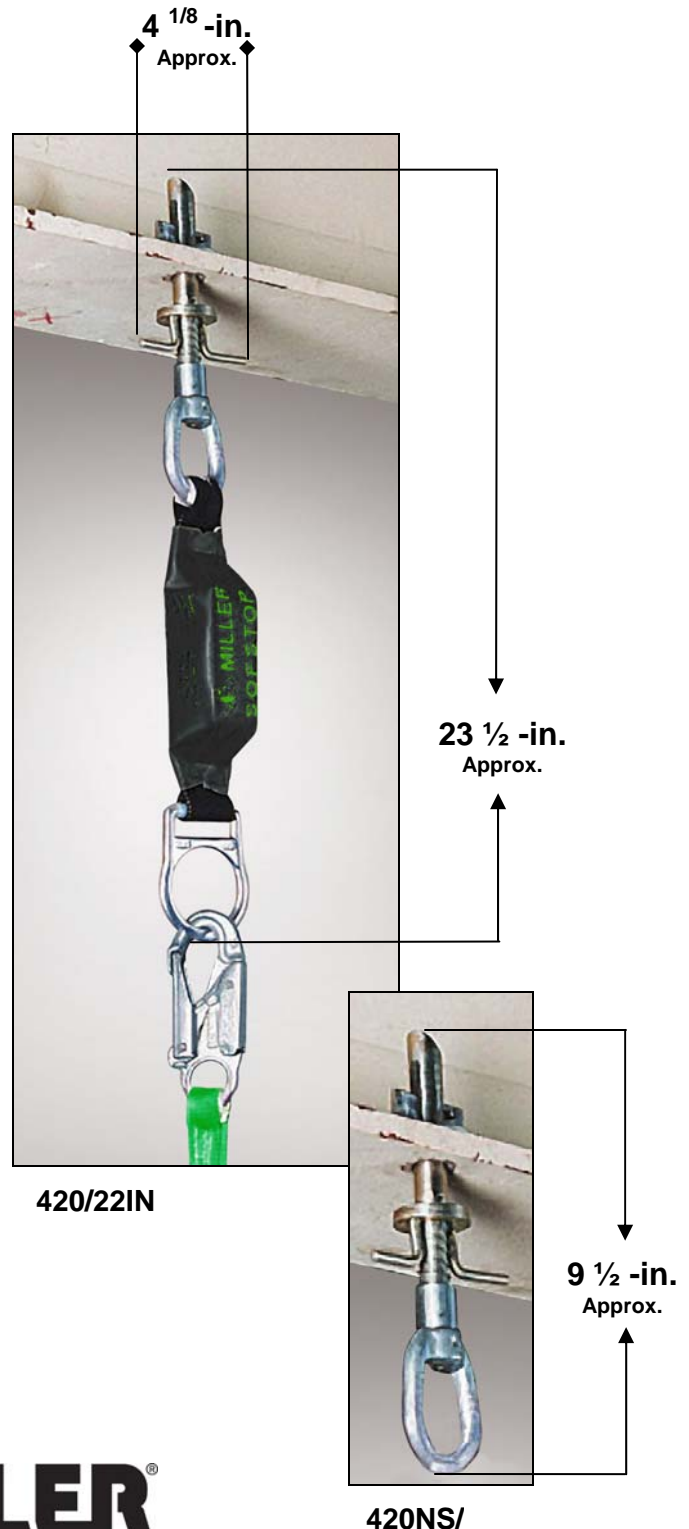

MILLER®

by Honeywell

Toll Free 800.873.5242 (press 4) • hsptechsupport@honeywell.com • www.millerfallprotection.com

⚠ WARNING! THIS DOCUMENT PROVIDES AN OVERVIEW OF FALL PROTECTION PRODUCTS AVAILABLE FROM HONEYWELL AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. HONEYWELL RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.