

Miller AirCore™ Wind Energy Harness

Description

The new AirCore™ Wind Energy harness is the harness of choice for wind turbine applications. This new line of AirCore harnesses keeps your workers comfortable and safe – increasing productivity. The lightweight design is customized for workers building and servicing wind turbines - reducing fatigue for all-day endurance.

Materials

- Webbing (DuraFlex®):** Stretchable Polyester (green or blue)
- Cam Buckle:** Anodized black aluminum
- Elastic Keepers:** Elastic
- Thread:** 6-cord, bonded 3-strand or polyester thread [Min. tensile strength of 42 lbs (0.19kN)]
- Grommets:** Stainless steel
- *Hardware:** Clear chromate, finished carbon steel OR clear anodized, forged aluminum alloy, depending on model

Back, Belt, Leg and

- Shoulder Pads:** Nylon, polyester, polyurethane, polypro
- Back Mesh Shield:** Polyester mesh
- Label Pack:** Evoprene, nylon
- Labels:** Valeron®
- Size Labels:** Hop-Syn® XT
- Lumbar Wear Pad:** High Density Polyethylene (HDPE)
- Tool Loops:** Polyester, PVC

*All hardware meets ASTM (50) fifty-hour salt spray.

Valeron® is a registered trademark of Valéron Strength Films.
Hop-Syn® XT is a registered trademark of Hop Industries Corporation.

Technical

- Max. Capacity:** 400 lbs (181.4 kg)
- Minimum Tensile Strength:**
 - Webbing:** 5,000 lbs. (22 kN)
 - *D-Ring:** 5,000 lbs. (22 kN)
 - *Buckles:** 4,000 lbs. (18 kN)

Compliance

Harnesses meet OSHA 1926.502, ANSI Z359.1, ANSI A10.32 and CSA Z259.10-12 requirements.



ACFW-QCBDPUG




Miller AirCore™ Wind Energy Harnesses*

Model Number	Back D-Ring	Front D-Ring	Chest Strap Buckle	Leg Strap Buckles	Belt with Lumbar Pad	Side D-Rings	Wear Pad	Tool Loops	Weight
ACFW-QCBDPUG	Yes (Steel)	Yes (Steel)	Steel Quick Connect	Steel Quick Connect	Yes	Yes (Steel)	Yes	Yes	6.6 lbs. (3.0 kg)
AAFW-QCBDPUG	Yes (Alum.)	Yes (Alum.)	Alum. Quick Connect	Alum. Quick Connect	Yes	Yes (Alum.)	Yes	Yes	5.8 lbs. (2.6 kg)

*All Miller AirCore Wind Energy Harnesses also include: cam buckle shoulder strap adjustment, two pull-free lanyard keepers, and elastic webbing keepers. Model numbers listed are for universal size in green webbing. Harnesses are also available in small/medium (SM) or XXL/XXXL (23X) by replacing the "U" in the model number with "SM" or "23X" (Ex: ACFW-QCBDPSMG). To order blue webbing, replace the "G" at the end of the model number with a "B".

Miller AirCore™ Wind Energy Harness Accessories

Lumbar Wear Pad

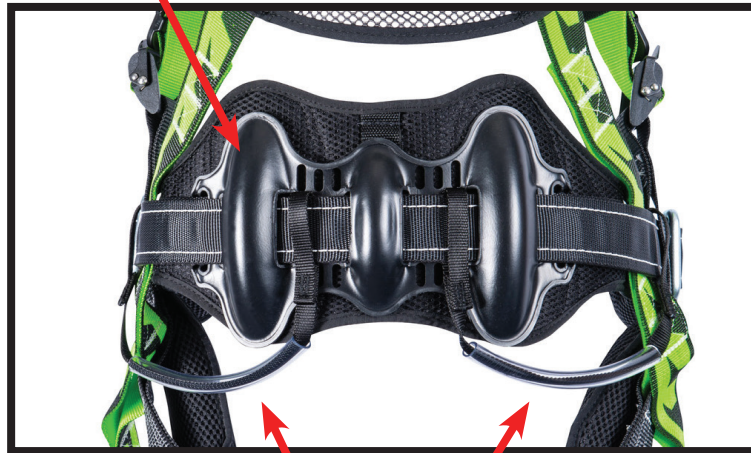

Tool Loops
(shown attached to harness belt)

Miller AirCore™ Wind Energy Harness Accessories

Model Number	Description	Weight
ACLWP	Lumbar Wear Pad	0.2 lbs (0.1kg)
ACTL10	Tool Loops for attachment to harness belt, package of 10	0.5 lbs (0.2kg)

*The Lumbar Wear Pad and Tool Loops are replaceable. Above model numbers are provided for replacement orders.



by Honeywell

Toll Free 800.873.5242 (press 4) • hsptechsupport@honeywell.com • www.millerfallprotection.com

⚠ WARNING! THIS DOCUMENT PROVIDES AN OVERVIEW OF FALL PROTECTION PRODUCTS AVAILABLE FROM HONEYWELL AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. HONEYWELL RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.