Manyard HP™ Shock-Absorbing Lanyards w/Aluminum Connectors

Description

The Manyard HP Shock-Absorbing Lanyards are connecting devices for fall protection applications. They feature a special woven shock-absorbing inner core that reduces fall arrest forces. The heavy-duty tubular outer jacket serves as a back-up web lanyard.

Materials

Webbing:

 Safety Strap/Jacket: Green tubular polyester webbing

Shock-absorbing web core: polyester

Min. Tensile: 5,000 lbs. (22kN) on webbing

Thread: 6 cord bonded 3 strand polyester thread,

with a minimum tensile of 42 lbs.

Hardware: Aluminum

* All hardware meets ASTM (50) fifty-hour salt spray test requirements.

Label Materials: Valeron

Technical


Max Working Load Capacity: 310 lbs (141 kg)

Snap Hooks: 5,000 lbs. (22kN)

3/4" (19mm) gate opening

Rebar Hooks: 5,000 lbs. (22kN)

2 1/2 in. (63mm) gate opening

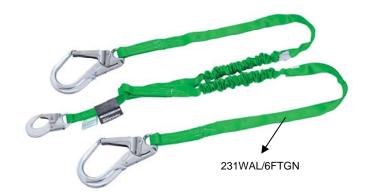



Certification

OSHA 1926.502, 1910.66 and ANSI A10.32

SKU	# of Legs	Harness Connection	Anchorage Connection	Weight	Standard Length
216WAL/6FTGN	One	Aluminum Locking Snap Hook	Aluminum Locking Snap Hook	1.5 lbs (0.7kg)	6' (1.8m)
219WAL/6FTGN	One	Aluminum Locking Snap Hook	Aluminum Locking Rebar Hook	2.3 lbs (1.0kg)	6' (1.8m)
231WAL/6FTGN	Two	Aluminum Locking Snap Hook	Aluminum Locking Rebar Hooks	4.0 lbs (1.8kg)	6' (1.8m)
232WAL/6FTGN	Two	Aluminum Locking Snap Hook	Aluminum Locking Snap Hooks	2.5 lbs (1.1kg)	6' (1.8m)
233WAL/6FTGN	One	Choke-Off Loop	Aluminum Locking Snap Hook	2.5 lbs (1.1kg)	6' (1.8m)
233WRAL/6FTGN	One	Choke-Off Loop	Aluminum Locking Rebar Hook	2.5 lbs (1.1kg)	6' (1.8m)



by Honeywell

Toll Free 800.873.5242 (press 4) • hsptechsupport@honeywell.com • www.millerfallprotection.com