





Setting out with a new approach to safety eyewear, Honeywell wanted to create a product that would fit everyone no matter their gender, ethnicity, or facial features. After completing a landmark eyewear research study, the company poured everything it learned into the development of the Honeywell Adaptec eyewear. The result? An adjustable eyewear system that can be worn by the widest range of workers and still deliver excellent protection, superior comfort, customized adjustability, premium optics, and a stylish look.

### One style

means simplicity of stocking and ordering as well as consistent usage by workers.

#### Three sizes

means the right protection, improved performance and optical clarity for everyone in your workplace.

### **Customized fit & performance**

means personalized comfort for each wearer, ensuring all-day protection and compliance with safety requirements.

Research shows that different facial features demand customized adjustability.



# **Ordering** Information

Most of Honeywell Adaptec<sup>™</sup> lenses offer K & N coating on both sides of the lens, and are available with tints for most applications.











For light brazing, cutting

Honeywell Ref #	North ref #	Frame Colour	Lens tint	Marking Ocular - Marking Fram
REGULAR SIZE				
1030750	T5901LBL	Blue/Grey	Clear	2C-1,2 EN166 1 FT KN CE
1030753	T5901LBLBM	Blue/Grey	Blue Mirror	2C-3 / 5-3,1 EN166 1 FT CE
1030755	T5901LBLS	Blue/Grey	Smoke	2C-3 / 5-3,1 EN166 1 FT KN CE
1030749	T5901LTK	Black/Red	Clear	2C-1,2 EN166 1 FT KN CE
1030748	T5901LTKA	Black/Red	Amber	2C-1,2 EN166 1 FT KN CE
1030747	T5901LTKG5	Black/Red	IR 5.0	5 EN166 1 FT CE
1030754	T5901LTKS	Black/Red	Smoke	2C-3 / 5-3,1 EN166 1 FT KN CE
1030751	T5901LTKTCG	Black/Red	I/O Mirror lens	2C-1,7 / 5-1.7 EN166 1 FT KN CE
NARROW SIZE				
1030740	T5901NBL	Blue/Grey	Clear	2C-1,2 EN166 1 FT H KN CE
1030743	T5901NBLBM	Blue/Grey	Blue Mirror	2C-3 / 5-3,1 EN166 1 FT H CE
1030745	T5901NBLS	Blue/Grey	Smoke	2C-3 / 5-3,1 EN166 1 FT H KN CE
1030739	T5901NTK	Black/Red	Clear	2C-1,2 EN166 1 FT H KN CE
1030738	T5901NTKA	Black/Red	Amber	2C-1,2 EN166 1 FT H KN CE
1030737	T5901NTKG5	Black/Red	IR 5.0	5 EN166 1 FT H CE
1030744	T5901NTKS	Black/Red	Smoke	2C-3 / 5-3,1 EN166 1 FT H KN CE
1030741	T5901NTKTCG	Black/Red	I/O Mirror lens	2C-1,7 / 5-1.7 EN166 1 FT H KN CE
WIDE SIZE				
1030760	T5901WBL	Blue/Grey	Clear	2C-1,2 EN166 1 FT KN CE
1030763	T5901WBLBM	Blue/Grey	Blue Mirror	2C-3 / 5-3,1 EN166 1 FT CE
1030765	T5901WBLS	Blue/Grey	Smoke	2C-3 / 5-3,1 EN166 1 FT KN CE
1030759	T5901WTK	Black/Red	Clear	2C-1,2 EN166 1 FT KN CE
1030758	T5901WTKA	Black/Red	Amber	2C-1,2 EN166 1 FT KN CE
1030757	T5901WTKG5	Black/Red	IR 5.0	5 EN166 1 FT CE
1030764	T5901WTKS	Black/Red	Smoke	2C-3 / 5-3,1 EN166 1 FT KN CE
1030761	T5901WTKTCG	Black/Red	I/O Mirror lens	2C-1,7 / 5-1.7 EN166 1 FT KN CE

Packaging Information (Eyewear): Unit Box (1), Ten-Pack (10), Case (50)

### **Sperian Protection**

Immeuble Edison - Paris Nord 2 33, rue des Vanesses - BP 55288 Villepinte 95958 Roissy CDG Cedex - France Tél: +33 (0)1 49 90 79 79 Fax: +33 (0)1 49 90 71 04 infofrance@sperian.com www.sperian.com

### North By Honeywell

Anodeweg 1 4338 RA Middelburg The Netherlands Tel: +31 (0) 118 65 64 00 Fax: +31 (0) 118 62 75 35

E-Mail: HLS.NL51.Info@Honeywell.com

**Honeywell** 

DOC2470 - July 2011 - © 2011 Honeywell International Inc

### **Honeywell Adaptec**







One style. Three sizes. Customized fit & performance.

**SPERIAN IS NOW HONEYWELL** 












# Adjustable nose bridge centers eyes to reduce fatigue

Three-position nose bridge is simple to adjust and keeps eyes centered in the lens, where optical clarity is best.

Workers' vision is less strained so they experience less eye fatigue, work more comfortably for longer periods, and can more clearly see their work.

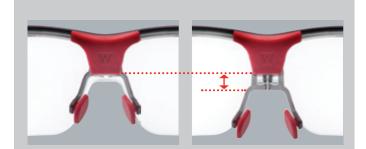


# Self-adjusting nose pads add to worker comfort

Soft, flexible material allows each nose pad to independently conform to the wearer's face, delivering greater comfort, contact, and stability.



### Adjustable lens angle improves safety and reduces fogging

Each temple hinge ratchets to seven positions — 30° of custom adjustability — so lens is angled for both optimal eye protection and ideal space for air circulation.

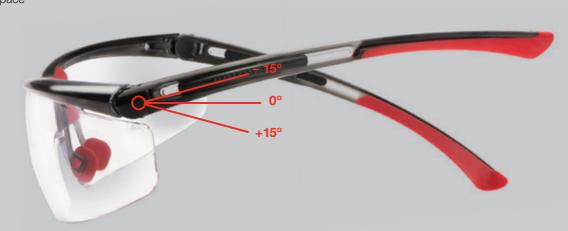

## Temples micro-adjust for a snug fit and all-day comfort

A proprietary temple design (patent pending) allows workers to adjust temple tension anytime, safely and without removing eyewear. Workers can adjust for personal preference or task at hand – a firmer fit for active work or a lighter fit for general wear.

Temple arm features a rigid insert that slides to control pressure against the head. Wearer can slide insert from front to back for a firmer fit, or back to front for a looser fit.

