

# HONEYWELL MILLER® LADDER TOP BRACKET AND SRL COMBO

Fixed Ladder Safety System.  
No Cable Needed.



NOTE: When installing the top bracket with a swing gate, attach the bracket on the opposite side of where the swing gate is hinged.

## MAXIMIZE EFFICIENCY ON THE JOB SITE

- No cable needed/no tension check
- No shuttle required
- Easy install
- Meets OSHA, ANSI, and CSA standards
- No front D-ring harness needed

## Fixed Ladder Safety System with Top Bracket and Self-Retracting Lifeline



Combine our nearly indestructible Falcon™ Self-Retracting Lifelines (SRL) with our Ladder Top Bracket Assembly for a cost-competitive solution to ladder safety. Meet OSHA's fixed ladder regulation (1910.23) requiring a personal fall arrest or ladder safety system on fixed ladders over 24 ft.

Keep workers safe while climbing on your fixed ladder systems. Talk to your Honeywell Safety Representative about our Ladder Top Bracket and self-retracting lifeline combinations today.

**Honeywell**  
**MILLER®**

# LADDER TOP BRACKET COMBINED WITH FALCON™ SELF-RETRACTING LIFELINE

Typical setup for ladder climbing safety has the ladder exceeding past the platform (A), ladder stopping at the platform (B), or the ladder stopping 1-2 rungs before the platform (C).

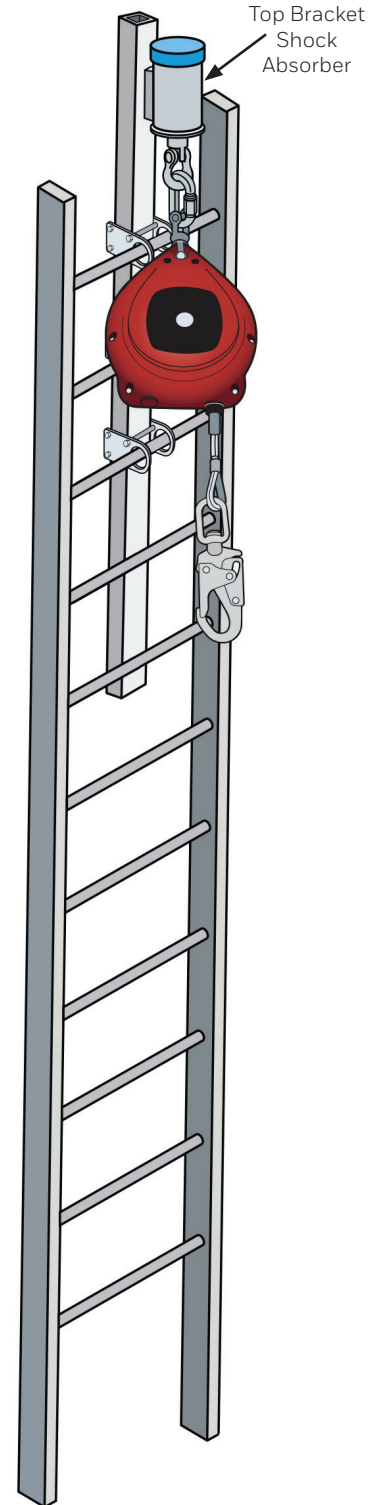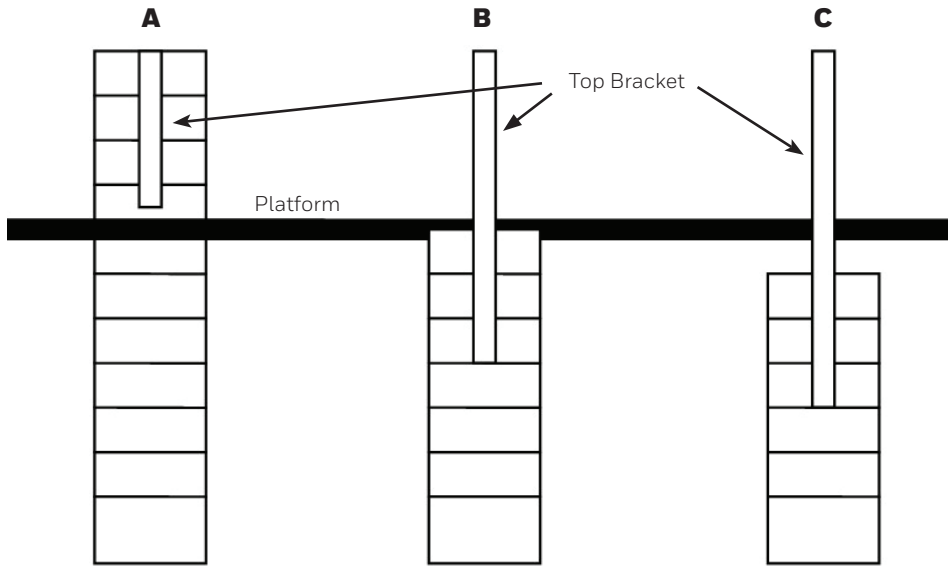

## Ladder Top Bracket

Model/SKU	Description
TRTB-7	7 ft galvanized top bracket assembly with built-in shock absorber
TRTB-10	10 ft galvanized top bracket assembly with built-in shock absorber

## Self-Retracting Lifelines

Model/SKU	Length	Description	Weight
MP20G-Z7 / MP20SS-Z7	20 ft (6 m)	Falcon™ Self-Retracting Lifeline with galvanized steel (G) or stainless steel (SS) cable with steel locking swivel snap hook, includes carabiner and tagline.*	8.9 lb (1.6 kg)
MP30G-Z7 / MP30SS-Z7	30 ft (10 m)		10.7 lb (4.8 kg)
MP50G-Z7 / MP50SS-Z7	50 ft (15 m)		14.8 lb (6.7 kg)
MP65G-Z7 / MP65SS-Z7	65 ft (20 m)		17.1 lb (7.7 kg)

\*Standard Falcon models certified to ANSI Z359.14-2014 Class B

NOTE: A 20 ft ladder may require a 30 ft retractable when you attach the top bracket as it will increase the height. Additional lengths available.

## Honeywell Safety Products

300 South Tryon Street  
Charlotte, NC 28202  
Tel: 800-430-5490  
Fax: 800-322-1330  
safety.honeywell.com

FALL-Miller-Top Ladder Bracket\_SS-EN | 03/2020  
© 2020 Honeywell International Inc.

THE  
FUTURE  
IS  
WHAT  
WE  
MAKE IT

**Honeywell**